



Pb-free
HEAT

STANLEY

AA□ 101 Series

Alpha-Numeric Display/Case Size 22.8 x 33.0 mm

Features

| | |
|-------------------|---|
| Case Size | 22.8 x 33 mm (W x H) |
| Product features | <ul style="list-style-type: none">Each color has anode common.A black case is available.Lead-free soldering compatibleRoHS compliant |
| Peak wavelength | Orange : 605nm Red : 660nm |
| Number of Digit | 1 Digit |
| Segment Shape | Arrow Feather Type |
| Character Height | 25.4 mm |
| Die materials | Orange : GaAsP Red : GaAlAs |
| Soldering methods | TTW (Through The Wave) soldering and manual soldering |
| ESD | More than 2kV(HBM) |
| Packing | Tray |

Recommended Applications

Amusement Equipment, Electric Household Appliances, Other General Applications

Emitted Color

| Part No. | Material | Emitted Color | Chip/Segment |
|-------------------------------------|----------|---------------|--------------|
| Anode Common Case Color Black | | | |
| AAA101-B | GaAsP | Orange | 1 |
| | | | 2 |
| AAR101-B | GaAIAs | Red | 1 |
| | | | 2 |
| AAR101-C | GaAIAs | Red | 1 |
| | | | 2 |

Absolute Maximum Ratings

(Ta=25°C)

| Item | Symbol | Absolute Maximum Ratings | | | | Unit |
|---------------------------------|-------------------|--------------------------|-----|------------|-----|--------|
| | | Orange | | Red | | |
| | | Chip/Segment | | | | |
| | | 1 | 2 | 1 | 2 | |
| Power Dissipation | Pd | 60 | 120 | 50 | 100 | mW/seg |
| Forward Current | I _F | 25 | | 25 | | mA/seg |
| Pulse Forward Current * 1 | I _{FRM} | 100 | | 100 | | mA/seg |
| Derating (Ta=25°C or higher) | ΔI _F | 0.33 | | 0.33 | | mA/°C |
| | ΔI _{FRM} | 1.65 | | 1.65 | | mA/°C |
| Reverse Voltage | V _R | 4 | 8 | 4 | 8 | V |
| Operating Temperature | T _{opr} | -20 ~ +85 | | -20 ~ +85 | | °C |
| Storage Temperature | T _{stg} | -20 ~ +100 | | -20 ~ +100 | | °C |





* 1 I_{FRM} Measurement condition : Duty 1/5, f = 1kHz

Electro-Optical Characteristics




(Ta=25°C)

| Item | Conditions | Symbol | | Characteristics | | | | Unit |
|------------------------------------|----------------------|----------------|------|-------------------------|-------------------------|-------------------------|-------------------------|---------|
| | | | | Orange | | Red | | |
| | | | | Chip/Segment | | | | |
| | | | | 1 | 2 | 1 | 2 | |
| Luminous Intensity (-B Product) | I _F =20mA | I _v | MIN. | 2 | 4 | 6 | 12 | mcd/seg |
| | | | TYP. | 4 | 8 | 12 | 24 | |
| Luminous Intensity (-C Product) | I _F =20mA | I _v | MIN. | - | - | 12 | 24 | mcd/seg |
| | | | TYP. | - | - | 15 | 30 | |
| Forward Voltage | I _F =20mA | V _F | TYP. | 2.2 | 4.4 | 1.7 | 3.4 | V/seg |
| | | | MAX. | 2.5 | 5.0 | 2.0 | 4.0 | |
| Reverse Current | - | I _R | MAX. | 100(V _R =4V) | 100(V _R =8V) | 100(V _R =4V) | 100(V _R =8V) | μ A/seg |
| Peak Wavelength | I _F =20mA | λ _p | TYP. | 605 | | 660 | | nm |
| Spectral Line Half Width | I _F =20mA | Δλ | TYP. | 30 | | 30 | | nm |





Technical Data(Orange)

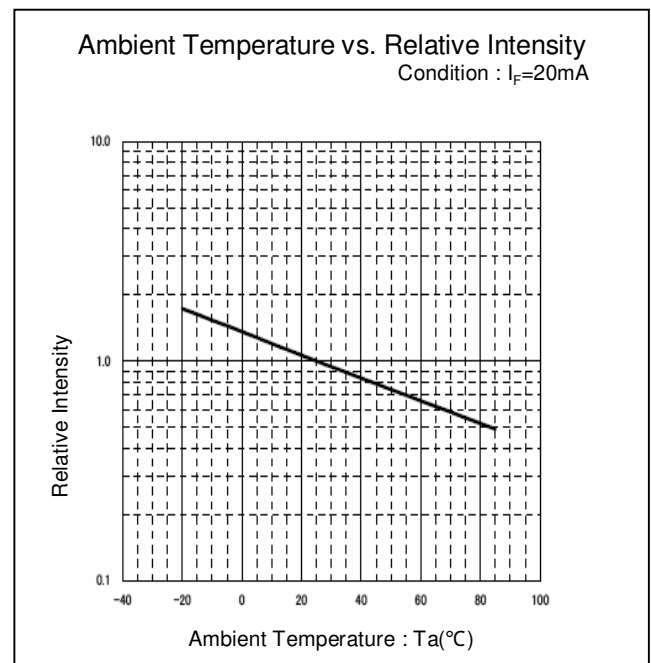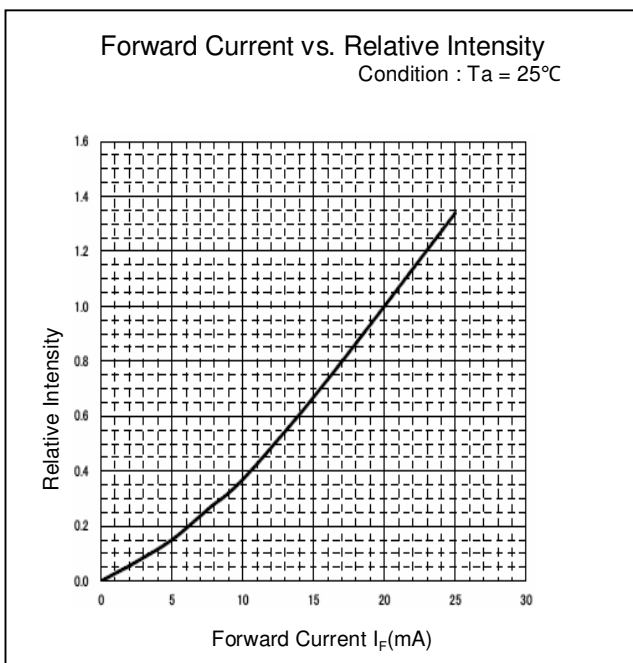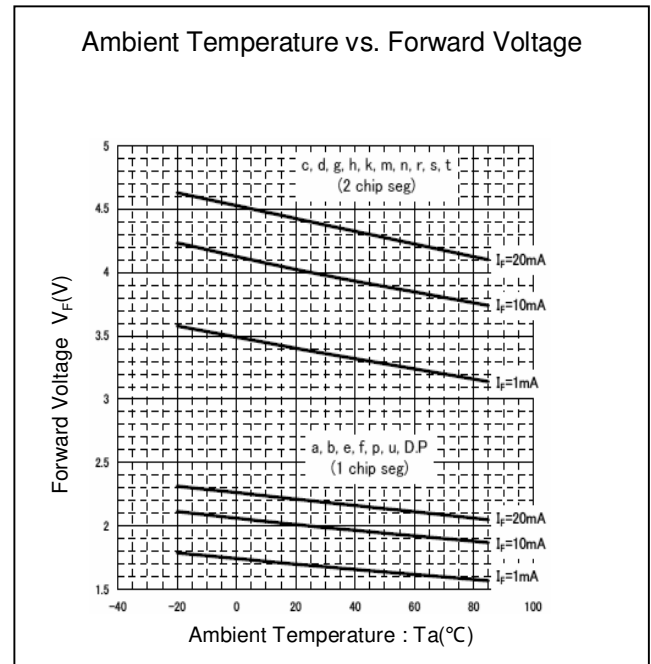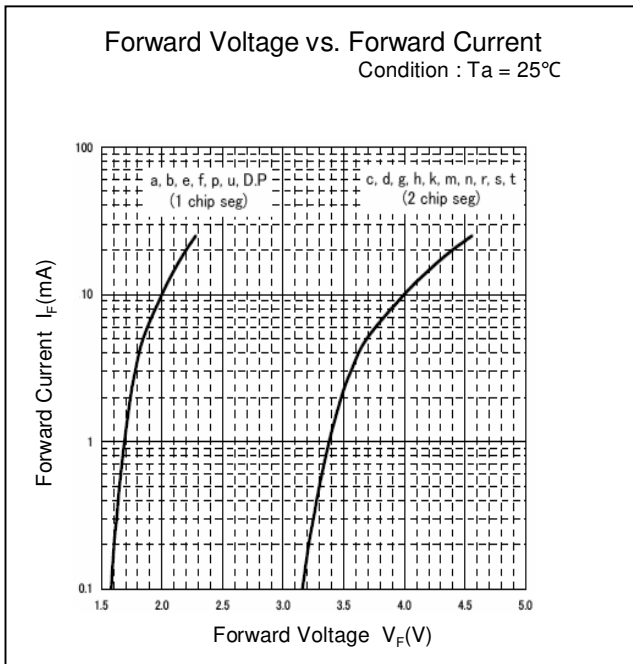




Technical Data(Orange)

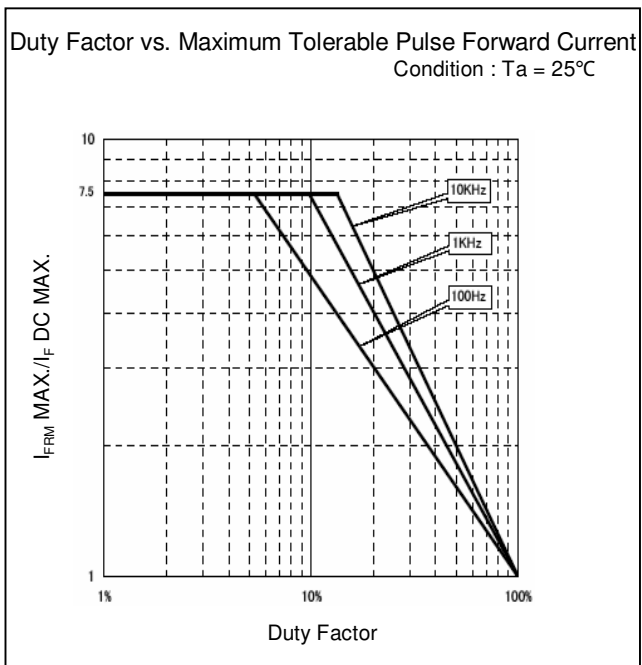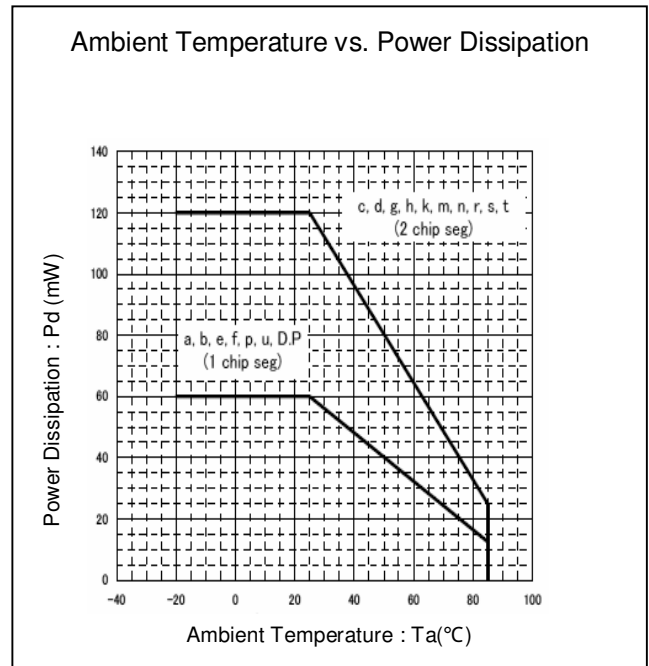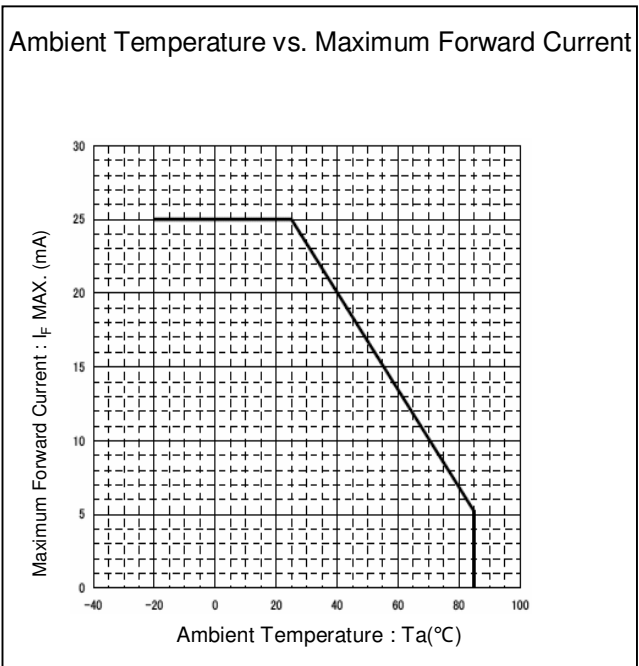

Technical Data(RED)

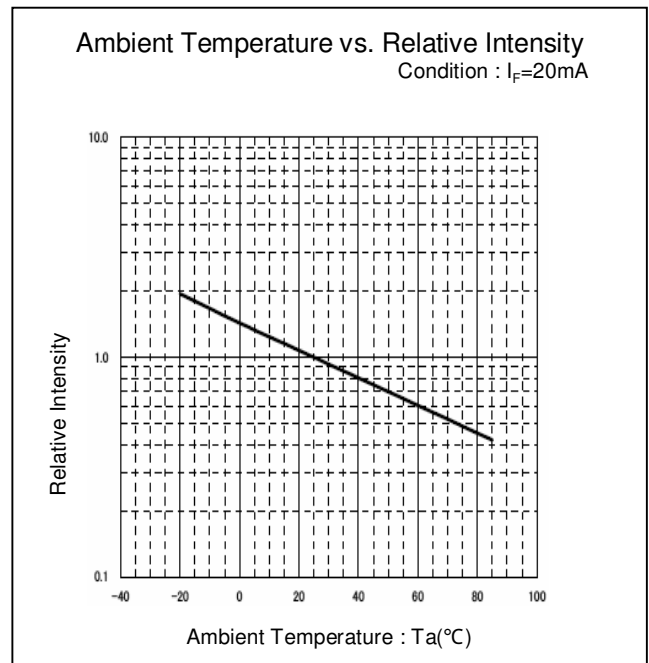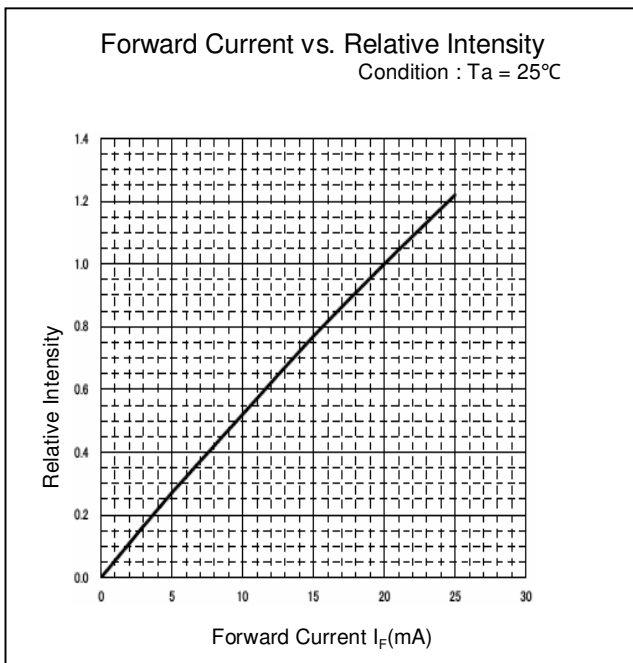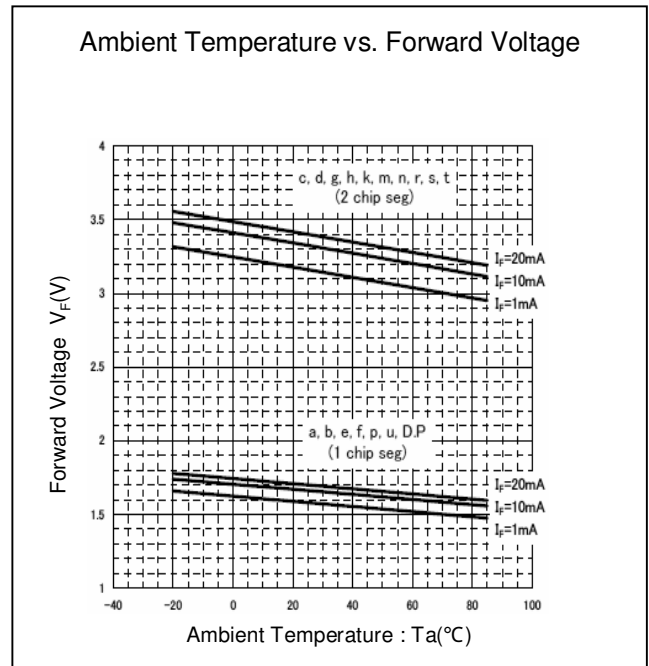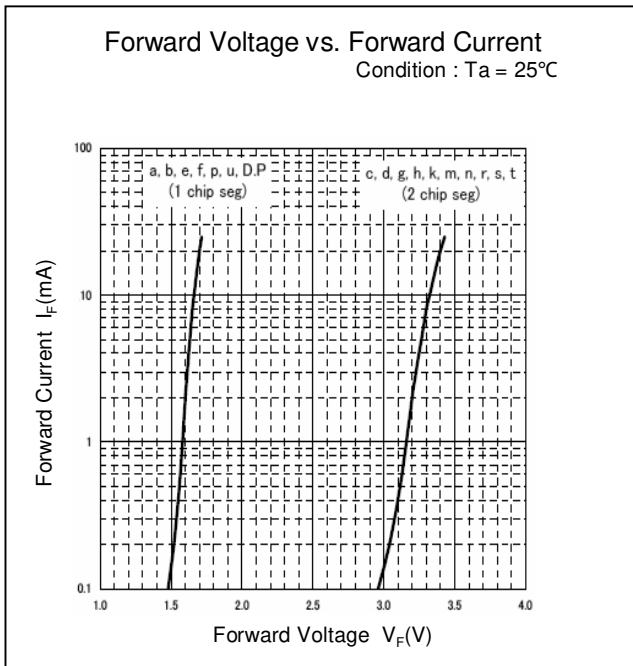


Technical Data(RED)

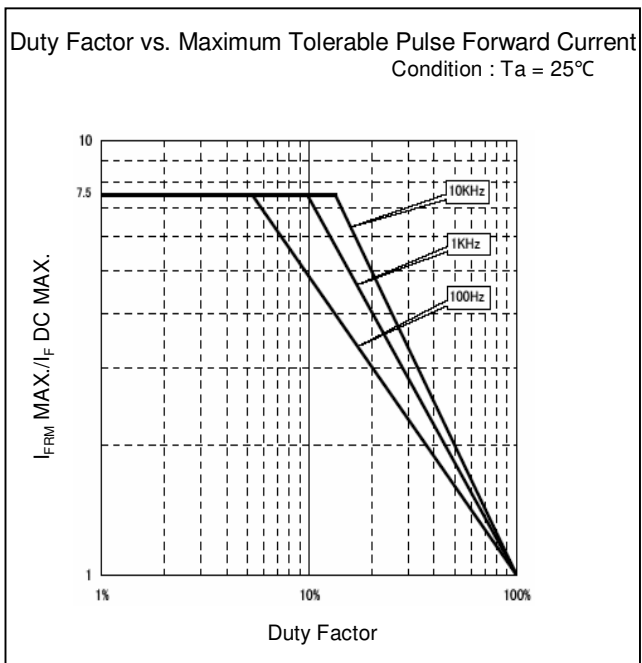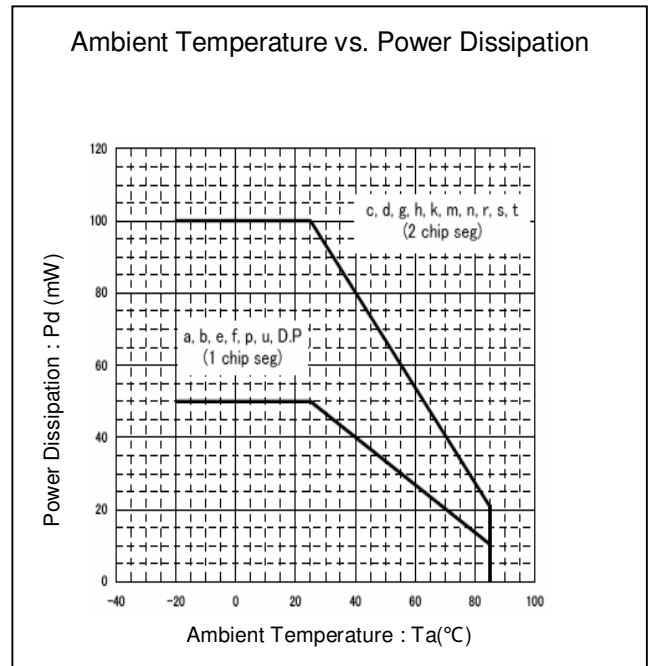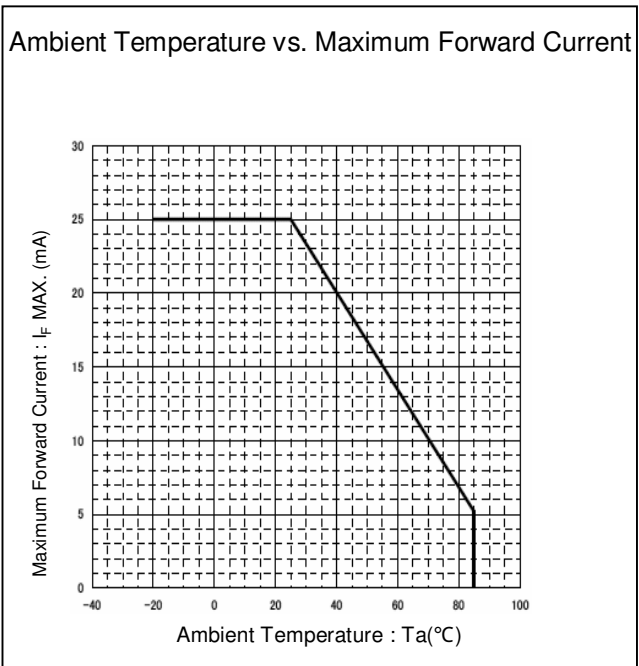

Package Dimensions


(Unit: mm)

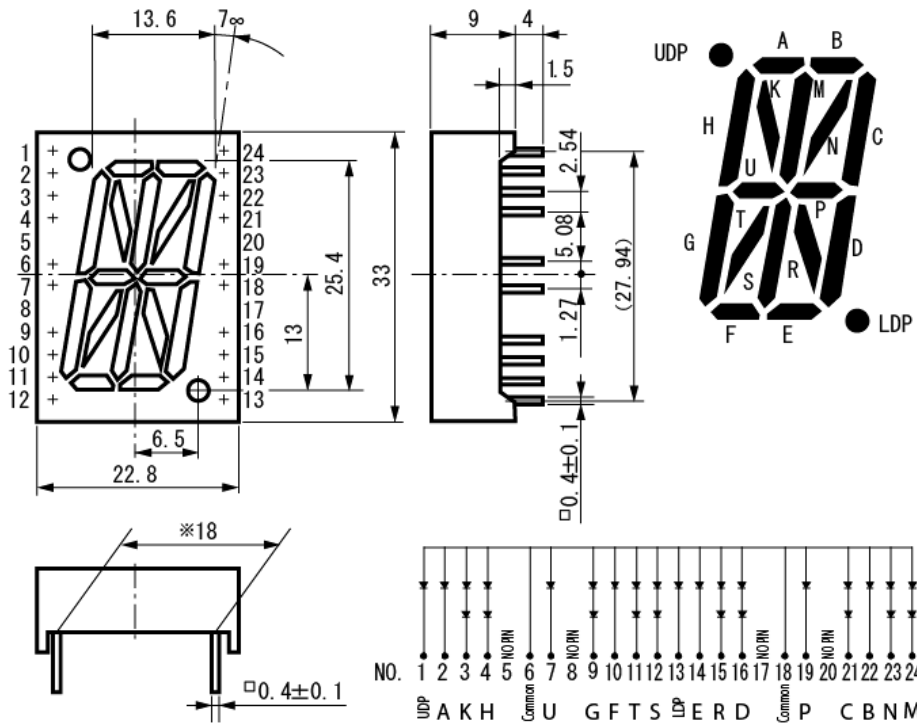

※ The length of lead base.

Recommended Soldering Pattern

(Unit: mm)

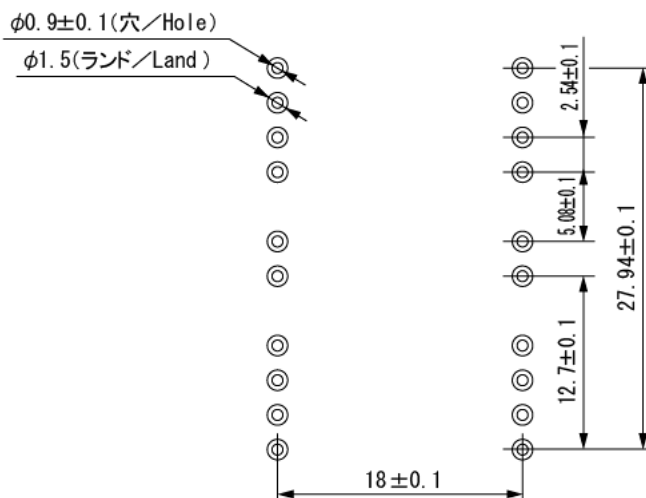

TTW (Through The Wave) soldering Conditions

| | | |
|-------------------|--|--|
| Pre-heating | 100 °C 60 s | (MAX.) Resin surface temperature (MAX.) |
| Solder Bath Temp. | 265 °C | (MAX.) |
| Dipping Time | 5 s | (MAX.) |
| Position | At least 2.0 mm away from the root of lead | |

- 1) The dip soldering process shall be 2 times maximum.
- 2) The product shall be cooled to normal temperature before the second dipping process.

Manual Soldering Conditions

| | | |
|------------------------------|--|--------------------|
| Iron tip temp. | 400 °C | (MAX.) (30 W Max.) |
| Soldering time and frequency | 3 s 2 times | (MAX.) (MAX.) |
| Position | At least 2.0 mm away from the root of lead | |

Reliability Testing Result

| Reliability Testing Result | Applicable Standard | Testing Conditions | Duration | Failure |
|-------------------------------|---------------------|--|----------|---------|
| Room Temp. Operating Life | BAJED-4701/100(101) | Ta = 25°C, If = Maximum Rated Current/seg | 1,000 h | 0/10 |
| Resistance to Soldering Heat | BAJED-4701/300(302) | 260± 5°C, 3mm from package base | 10s | 0/10 |
| Temperature Cycling | BAJED-4701/100(105) | Minimum Rated Storage Temperature(30min) ~ Normal Temperature(15min) ~ Maximum Rated Storage Temperature(30min) ~ Normal Temperature(15min) | 5 cycles | 0/10 |
| Wet High Temp. Storage Life | BAJED-4701/100(103) | Ta = 60± 2°C, RH = 90± 5% | 1,000 h | 0/10 |
| High Temp. Storage Life | BAJED-4701/200(201) | Ta = Maximum Rated Storage Temperature | 1,000 h | 0/10 |
| Low Temp. Storage Life | BAJED-4701/200(202) | Ta = Minimum Rated Storage Temperature | 1,000 h | 0/10 |
| Lead Tension | BAJED-4701/400(401) | 5N, 1time | 10s | 0/10 |
| Vibration, Variable Frequency | BAJED-4701/400(403) | 98.1m/s ² (10G), 100 ~ 2KHz sweep for 20min., XYZ each direction | 2 h | 0/10 |
| Lead Bend | BAJED-4701/400(401) | 2.5N, 0° ← → 90° | Twice | 0/10 |
| Shock | JSC 7201 A-8 | It falls on wood engraving from height of 75cm. | 3 times | 0/10 |

Failure Criteria

| Items | Symbols | Conditions | Failure criteria |
|---------------------|----------------|---|--|
| Luminous Intensity | Iv | If Value of each product Luminous Intensity | Testing Min. Value < Spec. Min. Value x 0.5 |
| Forward Voltage | V _F | If Value of each product Forward Voltage | Testing Max. Value ≥ Spec. Max. Value x 1.2 |
| Reverse Current | I _R | V _R = Maximum Rated Reverse Voltage V | Testing Max. Value ≥ Spec. Max. Value x 2.5 |
| Cosmetic Appearance | - | - | Occurrence of notable decoloration, deformation and cracking |

Special Notice to Customers Using the Products and Technical Information Shown in This Data Sheet

- 1) The technical information shown in the data sheets are limited to the typical characteristics and circuit examples of the referenced products. It does not constitute the warranting of industrial property nor the granting of any license.
- 2) For the purpose of product improvement, the specifications, characteristics and technical data described in the data sheets are subject to change without prior notice. Therefore it is recommended that the most updated specifications be used in your design.
- 3) When using the products described in the data sheets, please adhere to the maximum ratings for operating voltage, heat dissipation characteristics, and other precautions for use. We are not responsible for any damage which may occur if these specifications are exceeded.
- 4) The products that have been described to this catalog are manufactured so that they will be used for the electrical instrument of the benchmark (OA equipment, telecommunications equipment, AV machine, home appliance and measuring instrument).
The application of aircrafts, space borne application, transportation equipment, medical equipment and nuclear power control equipment, etc. needs a high reliability and safety, and the breakdown and the wrong operation might influence the life or the human body. Please consult us beforehand if you plan to use our product for the usages of aircrafts, space borne application, transportation equipment, medical equipment and nuclear power control equipment, etc. except OA equipment, telecommunications equipment, AV machine, home appliance and measuring instrument.
- 5) In order to export the products or technologies described in this data sheet which are under the "Foreign Exchange and Foreign Trade Control Law," it is necessary to first obtain an export permit from the Japanese government.
- 6) No part of this data sheet may be reprinted or reproduced without prior written permission from Stanley Electric Co., Ltd.
- 7) The most updated edition of this data sheet can be obtained from the address below:
<http://www.stanley-components.com>