

## Surge protection device - CN-UB-280DC-SB - 2818148

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Attachment plug with replaceable surge protection for coaxial signal interfaces. Connection: N connector plug/socket

### Product Features

- ✓ For outdoor installations
- ✓ Mounting plate enables mounting, e.g., in a control cabinet
- ✓ Replaceable, gas-filled arrester
- ✓ Installed as surge protection between antenna and wireless module



### Key commercial data

Packing unit	1 pc
GTIN	 4 017918 148379
Weight per Piece (excluding packing)	144.6 GRM
Custom tariff number	85363010
Country of origin	Germany

### Technical data

#### Dimensions

Height	25 mm
Width	25 mm
Depth	72 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
Degree of protection	IP55

#### General

## Surge protection device - CN-UB-280DC-SB - 2818148

### Technical data

#### General

Housing material	Nickel-plated brass
Color	nickel
Standards for air and creepage distances	IEC 60664-1
Surge voltage category	III
Pollution degree	2
Mounting type	Connection-specific intermediate plugging
Type	Attachment plug
Direction of action	Line-Shield/Earth Ground

#### Protective circuit

IEC test classification	C2
	C3
	D1
VDE requirement class	C2
	C3
	D1
Maximum continuous operating voltage $U_c$	280 V DC
	195 V AC
Maximum continuous voltage $U_c$ (wire-ground)	280 V DC
	195 V AC
Nominal current $I_N$	5 A (25 °C)
Operating effective current $I_c$ at $U_c$	$\leq 1 \mu A$
Nominal discharge current $I_n$ (8/20) $\mu s$ (Core-Earth)	20 kA
Nominal discharge current $I_n$ (8/20) $\mu s$ (Core-Shield)	20 kA
Total surge current (8/20) $\mu s$	20 kA
Total surge current (10/350) $\mu s$	2.5 kA
Max. discharge current $I_{max}$ (8/20) $\mu s$ maximum (Core-Shield)	20 kA
Nominal pulse current $I_{an}$ (10/1000) $\mu s$ (Core-Shield)	100 A
Impulse discharge current (10/350) $\mu s$ , peak value $I_{imp}$	2.5 kA
Output voltage limitation at 1 kV/ $\mu s$ (Core-Earth) spike	$\leq 900 V$
Output voltage limitation at 1 kV/ $\mu s$ (Core-Shield) spike	$\leq 900 V$
Voltage protection level $U_p$ (Core-Earth)	$\leq 1.1 kV$ (C2 - 10 kV / 5 kA)
	$\leq 900 V$ (C1 - 1 kV/500 A)
	$\leq 1 kV$ (C3 - 25 A)
	$\leq 1 kV$ (C3 - 25 A)
	$\leq 1 kV$ (C3 - 25 A)
Voltage protection level $U_p$ (Core-Shield)	$\leq 1.1 kV$ (C2 - 10 kV / 5 kA)

## Surge protection device - CN-UB-280DC-SB - 2818148

### Technical data

#### Protective circuit

	$\leq 900$ V (C1 - 1 kV/500 A)
	$\leq 1$ kV (C3 - 25 A)
	$\leq 1$ kV (C3 - 25 A)
	$\leq 1$ kV (C3 - 25 A)
Response time tA (Core-Earth)	$\leq 100$ ns
Response time tA (Core-GND)	$\leq 100$ ns
Input attenuation aE, asym.	typ. 0.1 dB ( $\leq 1.2$ GHz)
	typ. 0.2 dB ( $\leq 2.2$ GHz)
Cut-off frequency fg (3 dB), asym. (shield) in 50 Ohm system	$> 3$ GHz
Standing wave ratio SWR in a 50 $\Omega$ system	typ. 1.1 ( $\leq 2$ GHz)
Permissible HF power P <sub>max</sub> at VSWR = xx (50 ohm system)	700 W (VSWR = 1.1)
	200 W (VSWR = $\infty$ )
Capacity (Core-Earth)	typ. 1.5 pF
Capacity asymmetrical (shield)	typ. 1.5 pF
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C1 (1 kV / 500 A)
	C2 (10 kV/5 kA)
	C3 (100 A)
	D1 (2.5 kA)

#### Connection data

Connection method	N connector 50 $\Omega$
Connection type IN	N connector, male
Connection type OUT	N connector, female

#### Standards and Regulations

Standards/regulations	IEC 61643-21
-----------------------	--------------

### Classifications

#### eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807

# Surge protection device - CN-UB-280DC-SB - 2818148

## Classifications

### ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

### UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

## Approvals

### Approvals

---

#### Approvals

UL Listed / GOST

---


Ex Approvals

---

Approvals submitted

---

### Approval details


UL Listed 	
Nominal current I <sub>N</sub>	5 A
Nominal voltage U <sub>N</sub>	280 V

GOST 	
--	--

# Surge protection device - CN-UB-280DC-SB - 2818148


## Drawings

Diagram

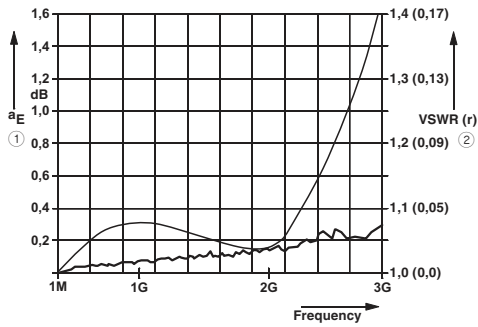

- ① Typical attenuation curve for CN-UB-280DC...
- ② Typical VSWR at CN-UB-280DC...

Dimensioned drawing

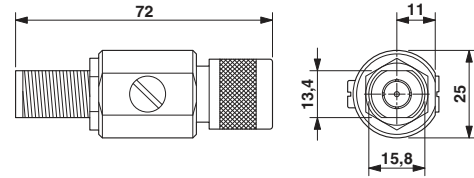

Circuit diagram

