

MATERIALS AND FINISHES:

BNC PLUG STR (P/N: 73171-6840)

BODY: BERYLLIUM COPPER  
PLATED NICKEL

REAR BODY, WASHER: BRASS  
PLATED NICKEL

COUPLING NUT: BRASS  
PLATED NICKEL

CENTER CONTACT: BRASS  
PLATED GOLD

WAVE WASHER: BERYLLIUM COPPER  
PLATED NICKEL

GASKET: SILICONE RUBBER

INSULATOR: TEFLON



CRIMP TUBE: BRASS  
PLATED NICKEL

NOTE:

OPERATING TEMPERATURE RANGE: -30°C TO +75°C  
MIN BEND RADIUS / MINOR AXIS: 3.25" / 82.550mm

CABLE: BELDEN 4794R  
OR EQUIVALENT

SHRINK TUBE VERSAFIT  
OR EQUIVALENT

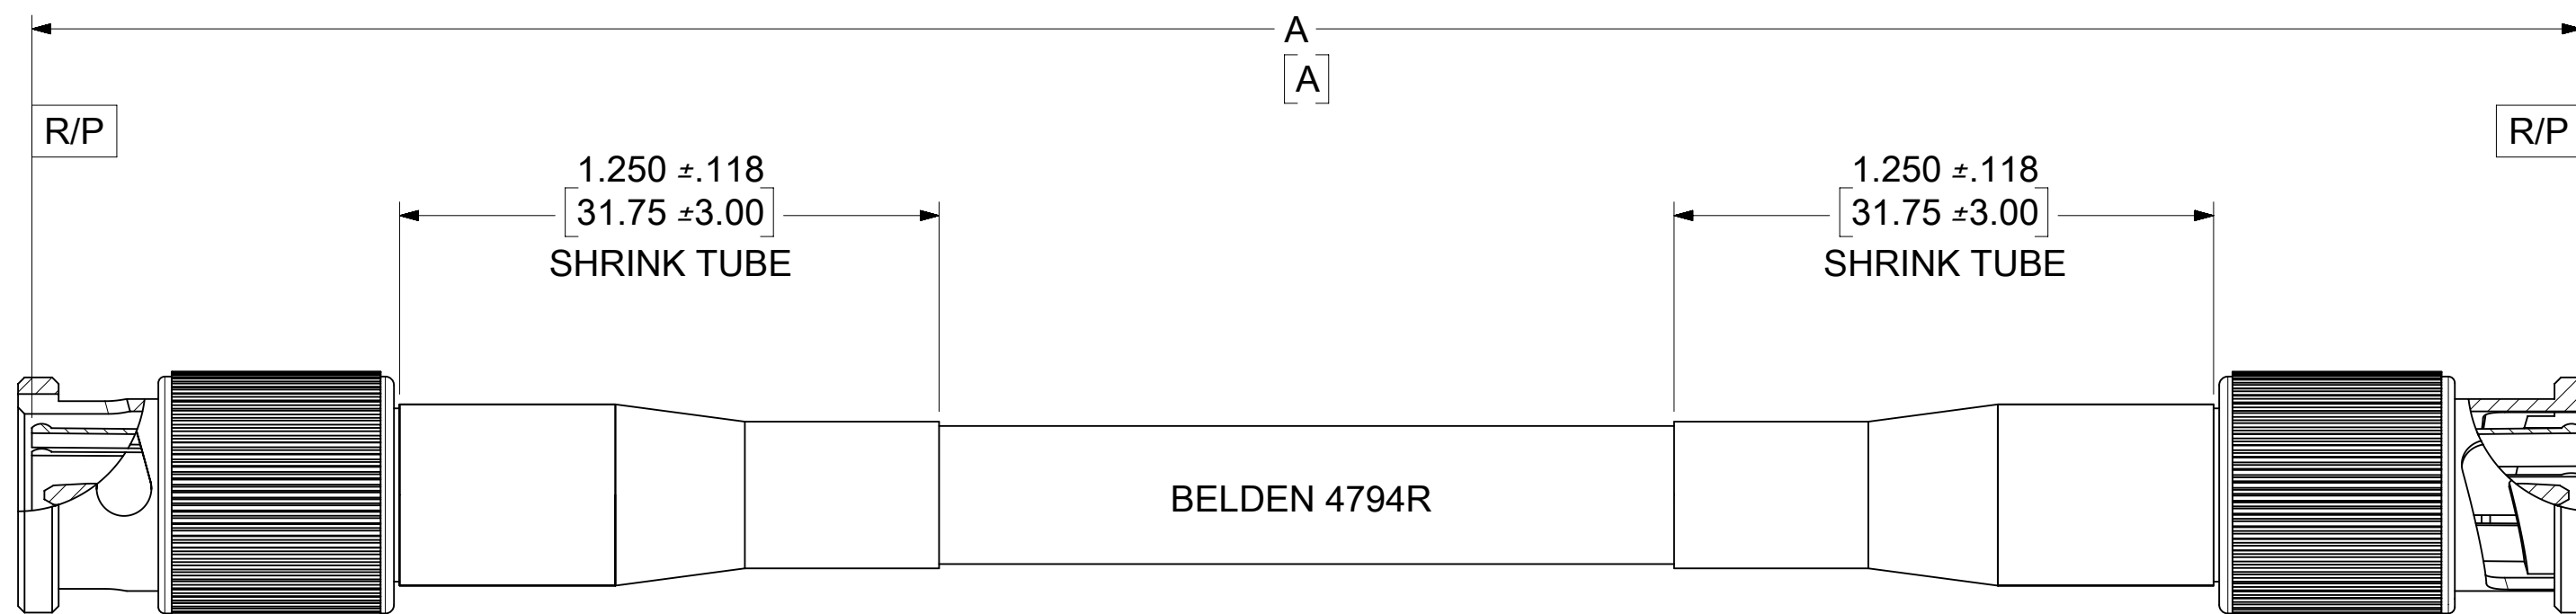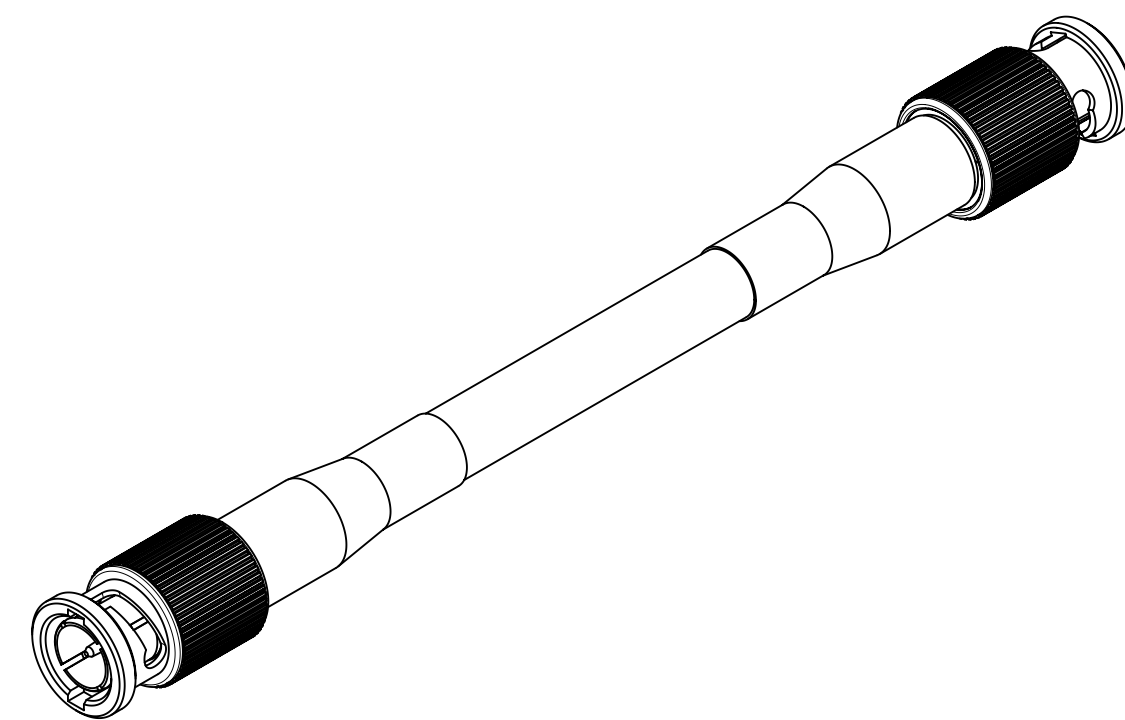

89762-9299	196.9±9.8	5000±250	BAG
89762-9298	5708.7±285.4	145000±7250	
89762-9297	118.1±5.9	3000±150	
89762-9296	78.7±3.9	2000±100	
89762-9295	2755.9±137.8	70000±3500	
89762-9294	3937.0±196.9	100000±5000	
89762-9293	1968.5±98.4	50000±2500	
89762-9292	787.4±39.4	20000±1000	
89762-9291	393.7±19.7	10000±500	
89762-9290	39.4±2.0	1000±50	PACKAGING
PART NO.	IN	MM	
DIM	A		

MIL-STD-348B, FIG. 330-2	BNC PLUG INTERFACE
SPECIFICATION	DESCRIPTION

D	2018/2/26	UPDATE VIEWS & ADD -9299 PER EWR #11808-A
REV	DATE	DESCRIPTION

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	SCALE	CURRENT REV DESC:	<b>molex</b>		
HYBRID	NTS				
GENERAL TOLERANCES (UNLESS SPECIFIED)			CA BNC PLUG STR BOTH END WITH BELDEN 4794R CA-BNCP/BNCP		
ANGULAR TOL	± 2.0°	EC NO: 172689	PRODUCT CUSTOMER DRAWING		
4 PLACES	±	DRWN: RYEH 2018/01/29	DOCUMENT NUMBER		
3 PLACES	±	CHK'D: YCHENG 2018/03/15	SD-89762-929		
2 PLACES	±	APPR: YCHENG 2018/03/15	DOC TYPE DOC PART REVISION		
1 PLACE	±	INITIAL REVISION:	PSD 001 D		
0 PLACES	±	DRWN: RYEH 2016/08/09	MATERIAL NUMBER		
		APPR: YCHENG 2016/10/06	SEE TABLE		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING	SERIES	CUSTOMER	SHEET NUMBER
		C-SIZE	89762	GENERAL MARKET	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2018/03/15	11:17:54
-----------------	----	--------------	------------	----------