



NOTE:

| | |
|------------------------|---------------------------------|
| MATERIAL | |
| HOUSING: | PA66 UL94V-0, BLACK |
| CONTACT: | BRASS |
| NUT: | BRASS |
| SHELL: | BRASS |
| FINISH | |
| CONTACT: | 10u" GOLD PLATED OVER NICKEL |
| NUT: | NICKEL PLATED |
| SHELL: | BRIGHT TIN PLATED |
| ELECTRICAL | |
| RATED CURRENT: | 16A |
| RATED VOLTAGE: | 63V |
| WATER PROOF: | IP67 |
| WIRE AWG: | 14 AWG MAX |
| ENVIRONMENT | |
| OPERATION TEMPERATURE: | -40°C TO +105°C |

858-LP5-103RLSY

3 = BRASS/TIN (B/T) SHELL & NUT
 S = STAINLESS STEEL (SS) SHELL & NUT
 T = B/T SHELL & SS NUT

1 = GOLD FLASH
 4 = 10u" GOLD

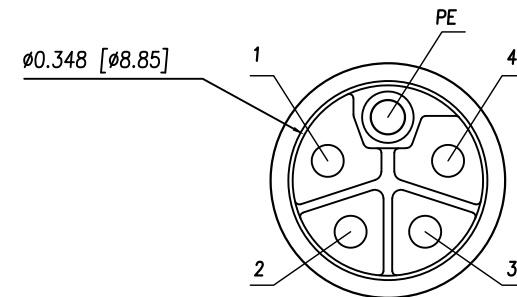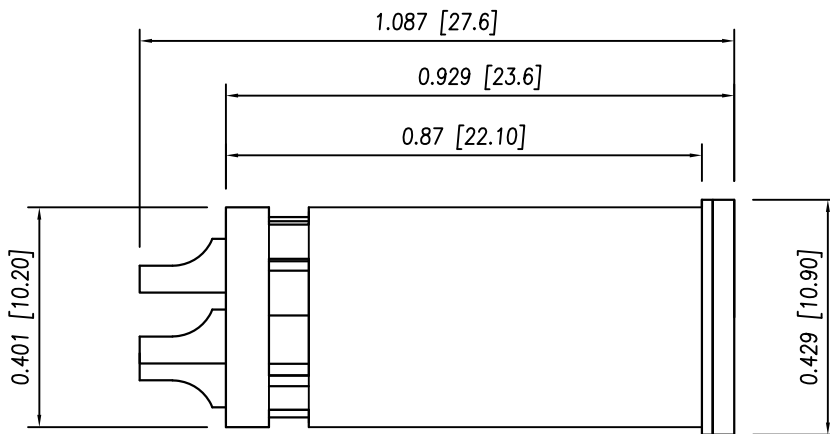

RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

08/01/2018

NorComp

SCALE:
NTS

SHEET OF
1 1

REV
4

DWG NO.

858-LP5-103RLS4