
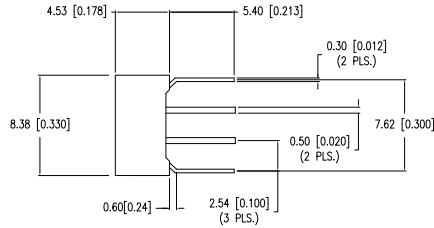


PART NUMBER	LDQ-M2212RI-UPG	REV.	C
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
06.03.10	E.C.N. #11646.		A
03.18.16	E.C.N. #12000.		B
02.02.17	ECN-Lumex2017000001.		C



ELECTRO-OPTICAL CHARACTERISTICS $T_A=25^{\circ}\text{C}$, PER SEGMENT

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		525		nm	$I_f = 20\text{mA}$
FORWARD VOLTAGE		3.5	4	V _f	$I_f = 20\text{mA}$
REVERSE VOLTAGE			5.0	V _r	$I_r = 100\mu\text{A}$
LUMINOUS INTENSITY		17000		μcd	$I_f = 10\text{mA}$
EMITTED COLOR:	GREEN				
FACE COLOR:	GRAY				
SEGMENT COLOR:	MILKY WHITE DIFFUSED				




LIMITS OF SAFE OPERATION AT 25°C, PER DIE

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	100	mA
STEADY CURRENT (R/G/B)	25	mA
POWER DISSIPATION	100	mW
OPERATING, STORAGE TEMP.	-40 TO +85	°C
SOLDERING TEMP.**	3 SEC MAX @ +260	°C

* $T < 10\mu\text{s}$

**2.0MM FROM BODY

CAUTION: STATIC SENSITIVE DEVICE
FOLLOW PROPER E.S.D. HANDLING PROCEDURES
WHEN WORKING WITH THIS PART.

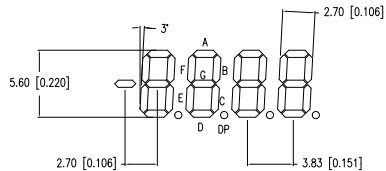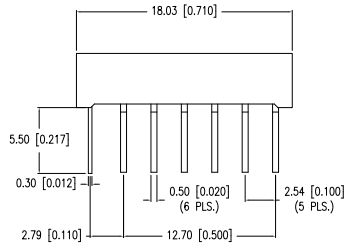

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=^{+DECIMAL PRECISION}_{-0.00} MAX.=^{+0.00}_{-DECIMAL PRECISION}



425 N. GARY AVE.
CAROL STREAM, IL 60188
PHONE: 800-278-5666
FAX: 630-315-2152
WEB: WWW.LUMEX.COM

0.22" QUAD DISPLAY WITH MINUS SIGN, COMMON ANODE, 525nm GREEN, MILKY WHITE DIFFUSED GRAY FACE.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	02.02.17	DRAWN BY:	E.C.
PAGE:	1 OF 1	CHKD BY:	G.Y.
SCALE:	N/A	APRVD BY:	R.C.
UNIT:	mm [INCH]		