


# LTCC

## High Temperature Inductors

### 0.27x0.27 inch size

### Higher Isat Series

NASCENTechnology, Inc. has developed a series of high temperature, RoHS compliant inductors using low temperature co-fired ceramic (LTCC) ferrite usable to 300°C that feature low profile, rugged packaging, and self shielding characteristics. See individual data sheets for part dimensions.

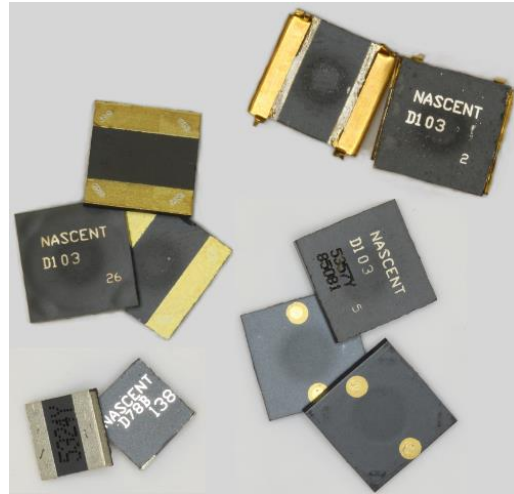

#### Electrical Parameters at 25 °C unless otherwise noted

Part No.	No Load Inductance <sup>†</sup> μH	100 mA Inductance μH	100 mA Tolerance	Nominal DC Resistance ohms	Rated Current <sup>††</sup> mA	Saturation Current* mA
85090	20	19	20%	0.50		800

<sup>†</sup> Tolerance for no load inductance is ±25 %

<sup>††</sup> Current will cause a 35 °C temperature rise over ambient (measured 20 to 55 °C)

\* Saturation Current is the current that results in a 35% decrease in inductance over the 100 mA Inductance.  
Thickness varies by part; the range is 0.032-0.100 in [0.8-2.54 mm]

Common termination options (please add option to the end of the part number when inquiring):

- A0 Thick film AgPt with side terminations, solderable
- C0 Thick film Au, Au wirebonding
- D0 Au over Ni, solderable
- D1 Au over Ni, Al wirebonding

For additional information, contact: Daryl Schofield, General Manager  
 Phone : 605-882-8513, Fax : 605-884-2450, E-mail : dschofield@nascenttechnology.com  
 NASCENTechnology Manufacturing, Inc. 1404 9<sup>th</sup> Ave. SW, Watertown, SD 57201  
[www.nascenttechnology.com](http://www.nascenttechnology.com)