

SERIES: SJ1-352XN | DESCRIPTION: AUDIO JACK


FEATURES

- low profile design
- switch options include:
- no switch
- tip switch
- tip and ring switch



.....

PART NUMBER KEY

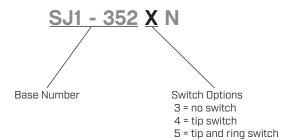

SPECIFICATIONS

.....

| parameter | conditions/description | min | typ | max | units |
|----------------------------|--|-----|-------|----------|----------|
| rated input voltage | | | 12 | | Vdc |
| rated input current | | | | 1 | А |
| contact resistance | between terminal and mating plug between terminal in a closed circuit | | | 50 30 | mΩ mΩ |
| insulation resistance | at 500 Vdc | 100 | | | MΩ |
| voltage withstand | for 1 minute | | | 500 | Vac |
| insertion/withdrawal force | | 0.3 | | 3 | kg |
| operating temperature | | -25 | | 85 | °C |
| life | | | 5,000 | | cycles |
| flammability rating | UL94V-0 | | | | |
| RoHS | yes | | | | |

MECHANICAL DRAWING

units: mm DESCRIPTION MATERIAL PLATING/COLOR tolerance: X.X ±0.3 mm terminal 1 copper alloy t=0.20 silver over nickel X.XX ±0.25 mm terminal 2 stainless steel t=0.20 silver over nickel X.XXX ±0.20 mm terminal 3 stainless steel t=0.20 silver over nickel PCB: ±0.05 mm unless otherwise specified terminal 10 brass t=0.40 silver over nickel brass t=0.40 terminal 11 silver over nickel bushing brass nickel PBT (UL94V-0) housing black 11.0 3.30 12.0 \$3.60+0.1 1.30 -2.50 ** ø6.00 5.00 ١. 3.0 0. Ð 3.5 5-1.00 5.0 8.5 10.0 9.0 Connecto<u>r</u> Edge Ð ,90(5t) 5-ø1.20 Ι Π 3.50 50 M 8.5 œ 5.0 5-1.5x0.8 10.0 Recommended PCB Layout Top View (1)3) Model No. SJ1-3523N SJ1-3524N SJ1-3525N


Ø3.5 MATING PLUG

.....

| Schematic | °1 °3 °3 °2 | 01 03 010 02 | 01 011 011 010 02 |
|-----------|----------------------|-----------------------|-------------------------------|
| PIN | | | |
| 1 | sleeve | sleeve | sleeve |
| 2 | tip | tip | tip |
| З | ring | ring | ring |
| 10 | NP | tip switch | tip switch |
| 11 | NP | NP | ring switch |
| | | | |

SOLDERABILITY

.....

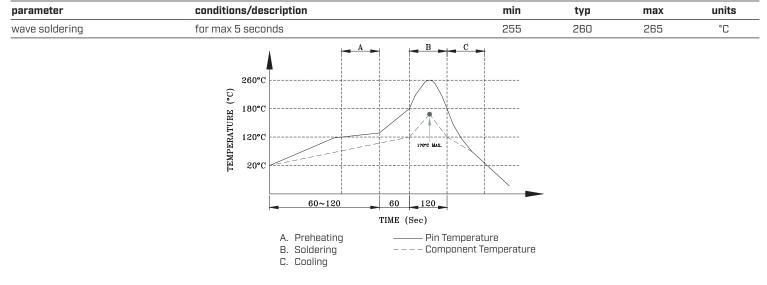

REVISION HISTORY

| rev. | description | date |
|------|--|------------|
| 1.0 | initial release | 09/06/2006 |
| 1.01 | new template applied | 02/15/2012 |
| 1.02 | updated datasheet | 10/03/2017 |
| 1.03 | changed terminal plating to silver | 02/12/2019 |
| 1.04 | brand update | 10/09/2019 |
| 1.05 | product reengineered for improved manufacturability and production yield, see PCN for details | 10/05/2022 |

The revision history provided is for informational purposes only and is believed to be accurate.

CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.



.....

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.