


INSULATED GATE BIPOLEAR TRANSISTOR
 WITH ULTRAFAST SOFT RECOVERY DIODE

UltraFast CoPack IGBT

Features


- Switching-loss rating includes all "tail" losses
- HEXFRED™ soft ultrafast diodes
- Optimized for high operating frequency (over 5kHz)
- See Fig. 1 for Current vs. Frequency curve



$V_{CES} = 600V$
 $V_{CE(sat)} \leq 3.0V$
 @ $V_{GE} = 15V, I_C = 12A$

Description

Co-packaged IGBTs are a natural extension of International Rectifier's well known IGBT line. They provide the convenience of an IGBT and an ultrafast recovery diode in one package, resulting in substantial benefits to a host of high-voltage, high-current, motor control, UPS and power supply applications.



Absolute Maximum Ratings

	Parameter	Max.	Units
V_{CES}	Collector-to-Emitter Voltage	600	V
$I_C @ T_C = 25^\circ C$	Continuous Collector Current	23	A
$I_C @ T_C = 100^\circ C$	Continuous Collector Current	12	
I_{CM}	Pulsed Collector Current ①	92	
I_{LM}	Clamped Inductive Load Current ②	92	
$I_F @ T_C = 100^\circ C$	Diode Continuous Forward Current	12	
I_{FM}	Diode Maximum Forward Current	92	°C
V_{GE}	Gate-to-Emitter Voltage	± 20	
$P_D @ T_C = 25^\circ C$	Maximum Power Dissipation	100	
$P_D @ T_C = 100^\circ C$	Maximum Power Dissipation	42	
T_J T_{STG}	Operating Junction and Storage Temperature Range	-55 to +150	g (oz)
	Soldering Temperature, for 10 sec.	300 (0.063 in. (1.6mm) from case)	
	Mounting Torque, 6-32 or M3 Screw.	10 lbf·in (1.1 N·m)	

Thermal Resistance

	Parameter	Min.	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case - IGBT	—	—	1.2	°C/W
$R_{\theta JC}$	Junction-to-Case - Diode	—	—	2.5	
$R_{\theta CS}$	Case-to-Sink, flat, greased surface	—	0.50	—	
$R_{\theta JA}$	Junction-to-Ambient, typical socket mount	—	—	80	
Wt	Weight	—	2 (0.07)	—	g (oz)

IRGBC30UD2



Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(\text{BR})\text{CES}}$	Collector-to-Emitter Breakdown Voltage ③	600	—	—	V	$V_{\text{GE}} = 0\text{V}, I_C = 250\mu\text{A}$
$\Delta V_{(\text{BR})\text{CES}/\Delta T_J}$	Temperature Coeff. of Breakdown Voltage	—	0.63	—	$\text{V}/^\circ\text{C}$	$V_{\text{GE}} = 0\text{V}, I_C = 1.0\text{mA}$
$V_{\text{CE}(\text{on})}$	Collector-to-Emitter Saturation Voltage	—	2.2	3.0	V	$I_C = 12\text{A}, V_{\text{GE}} = 15\text{V}$
		—	2.7	—		$I_C = 23\text{A}, \text{See Fig. 2, 5}$
		—	2.4	—		$I_C = 12\text{A}, T_J = 150^\circ\text{C}$
$V_{\text{GE}(\text{th})}$	Gate Threshold Voltage	3.0	—	5.5		$V_{\text{CE}} = V_{\text{GE}}, I_C = 250\mu\text{A}$
$\Delta V_{\text{GE}(\text{th})/\Delta T_J}$	Temperature Coeff. of Threshold Voltage	—	-11	—	$\text{mV}/^\circ\text{C}$	$V_{\text{CE}} = V_{\text{GE}}, I_C = 250\mu\text{A}$
g_{fe}	Forward Transconductance ④	3.1	8.6	—	S	$V_{\text{CE}} = 100\text{V}, I_C = 12\text{A}$
I_{CES}	Zero Gate Voltage Collector Current	—	—	250	μA	$V_{\text{GE}} = 0\text{V}, V_{\text{CE}} = 600\text{V}$
		—	—	2500		$V_{\text{GE}} = 0\text{V}, V_{\text{CE}} = 600\text{V}, T_J = 150^\circ\text{C}$
V_{FM}	Diode Forward Voltage Drop	—	1.4	1.7	V	$I_C = 12\text{A}, \text{See Fig. 13}$
		—	1.3	1.6		$I_C = 12\text{A}, T_J = 150^\circ\text{C}$
I_{GES}	Gate-to-Emitter Leakage Current	—	—	± 100	nA	$V_{\text{GE}} = \pm 20\text{V}$

Switching Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
Q_g	Total Gate Charge (turn-on)	—	29	36	nC	$I_C = 12\text{A}$
Q_{ge}	Gate - Emitter Charge (turn-on)	—	4.8	6.8		$V_{\text{CC}} = 400\text{V}$
Q_{gc}	Gate - Collector Charge (turn-on)	—	12	17		See Fig. 8
$t_{\text{d}(\text{on})}$	Turn-On Delay Time	—	67	—	ns	$T_J = 25^\circ\text{C}$
t_r	Rise Time	—	56	—		$I_C = 12\text{A}, V_{\text{CC}} = 480\text{V}$
$t_{\text{d}(\text{off})}$	Turn-Off Delay Time	—	170	250		$V_{\text{GE}} = 15\text{V}, R_G = 23\Omega$
t_f	Fall Time	—	140	270		Energy losses include "tail" and diode reverse recovery. See Fig. 9, 10, 11, 18
E_{on}	Turn-On Switching Loss	—	0.70	—	mJ	
E_{off}	Turn-Off Switching Loss	—	0.80	—		
E_{ts}	Total Switching Loss	—	1.5	2.5		
$t_{\text{d}(\text{on})}$	Turn-On Delay Time	—	61	—	ns	$T_J = 150^\circ\text{C}, \text{ See Fig. 9, 10, 11, 18}$
t_r	Rise Time	—	51	—		$I_C = 12\text{A}, V_{\text{CC}} = 480\text{V}$
$t_{\text{d}(\text{off})}$	Turn-Off Delay Time	—	190	—		$V_{\text{GE}} = 15\text{V}, R_G = 23\Omega$
t_f	Fall Time	—	190	—		Energy losses include "tail" and diode reverse recovery. See Fig. 9, 10, 11, 18
E_{ts}	Total Switching Loss	—	1.9	—	mJ	
L_E	Internal Emitter Inductance	—	7.5	—	nH	Measured 5mm from package
C_{ies}	Input Capacitance	—	680	—	pF	$V_{\text{GE}} = 0\text{V}$
C_{oes}	Output Capacitance	—	100	—		$V_{\text{CC}} = 30\text{V}$
C_{res}	Reverse Transfer Capacitance	—	11	—		See Fig. 7 $f = 1.0\text{MHz}$
t_{rr}	Diode Reverse Recovery Time	—	42	60	ns	$T_J = 25^\circ\text{C}$ See Fig.
		—	80	120		$T_J = 125^\circ\text{C}$ 14
I_{rr}	Diode Peak Reverse Recovery Current	—	3.5	6.0	A	$T_J = 25^\circ\text{C}$ See Fig.
		—	5.6	10		$T_J = 125^\circ\text{C}$ 15
Q_{rr}	Diode Reverse Recovery Charge	—	80	180	nC	$T_J = 25^\circ\text{C}$ See Fig.
		—	220	600		$T_J = 125^\circ\text{C}$ 16
$dI_{(\text{rec})M}/dt$	Diode Peak Rate of Fall of Recovery During t_b	—	180	—	A/ μs	$T_J = 25^\circ\text{C}$ See Fig.
		—	120	—		$T_J = 125^\circ\text{C}$ 17

Notes:

- ① Repetitive rating; $V_{\text{GE}}=20\text{V}$, pulse width limited by max. junction temperature.
(See fig. 20)
- ② $V_{\text{CC}}=80\%(V_{\text{CES}})$, $V_{\text{GE}}=20\text{V}$, $L=10\mu\text{H}$, $R_G=23\Omega$, (See fig. 19)
- ③ Pulse width $\leq 80\mu\text{s}$; duty factor $\leq 0.1\%$.
- ④ Pulse width $5.0\mu\text{s}$, single shot.

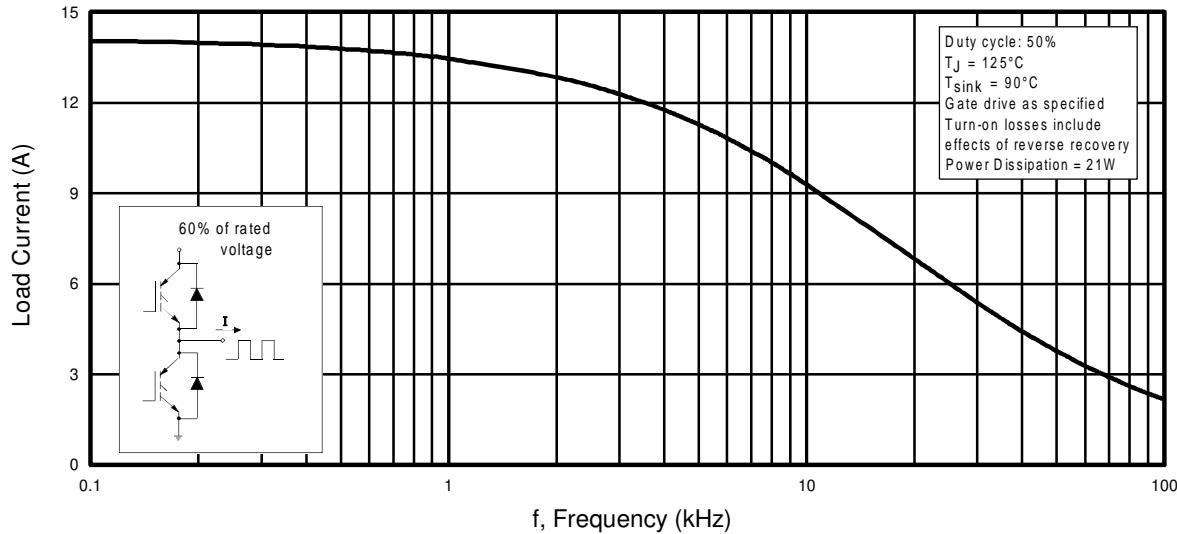


Fig. 1 - Typical Load Current vs. Frequency
(Load Current = I_{RMS} of fundamental)

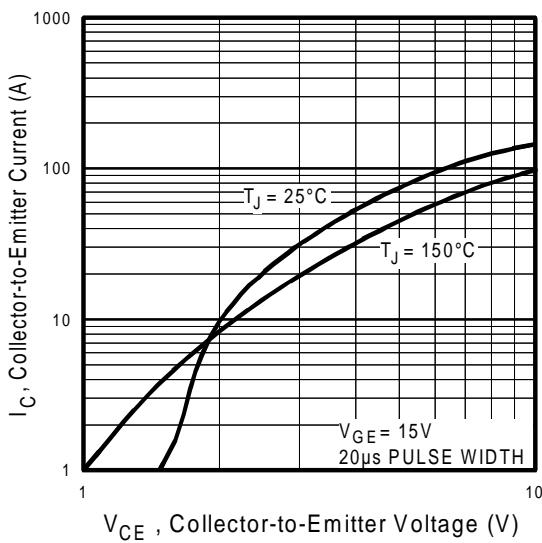


Fig. 2 - Typical Output Characteristics

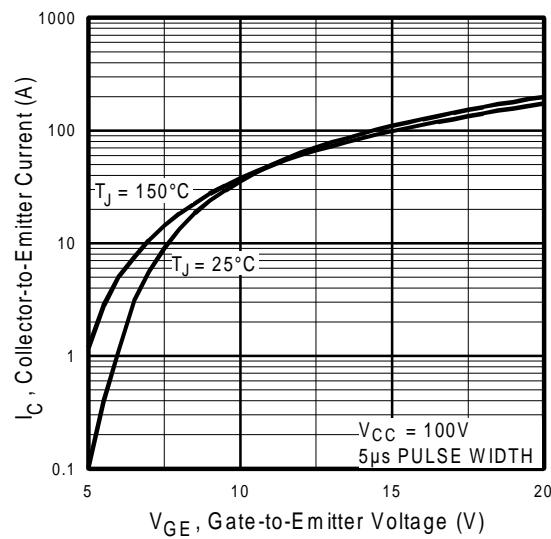


Fig. 3 - Typical Transfer Characteristics

IRGBC30UD2

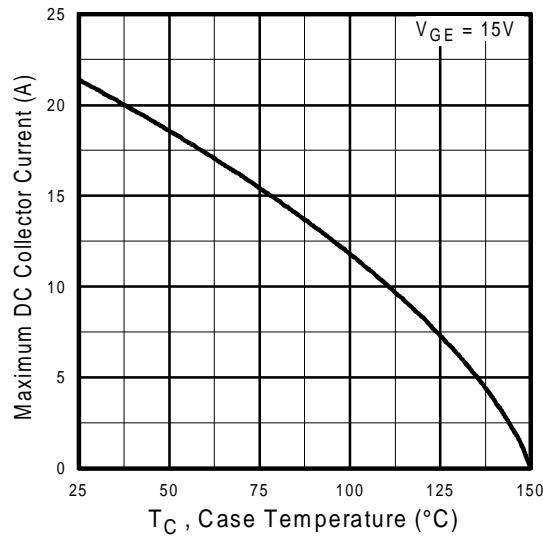


Fig. 4 - Maximum Collector Current vs. Case Temperature

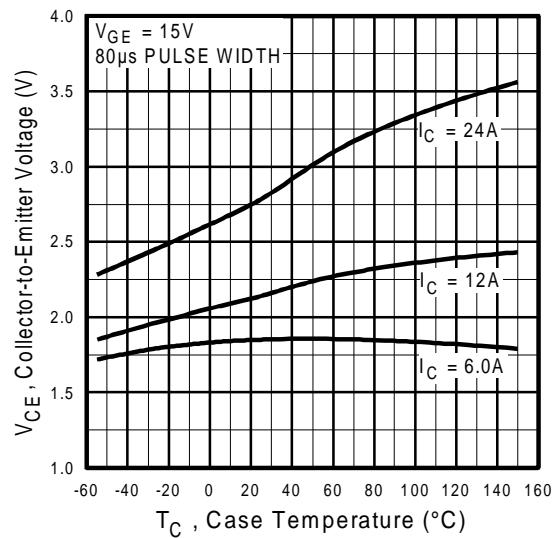


Fig. 5 - Collector-to-Emitter Voltage vs. Case Temperature

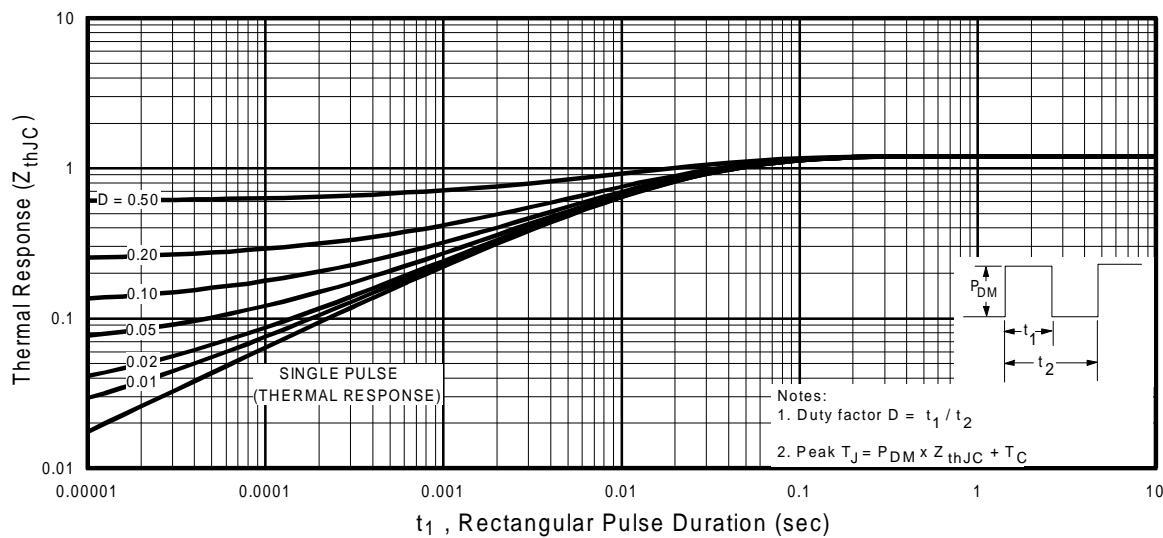


Fig. 6 - Maximum IGBT Effective Transient Thermal Impedance, Junction-to-Case

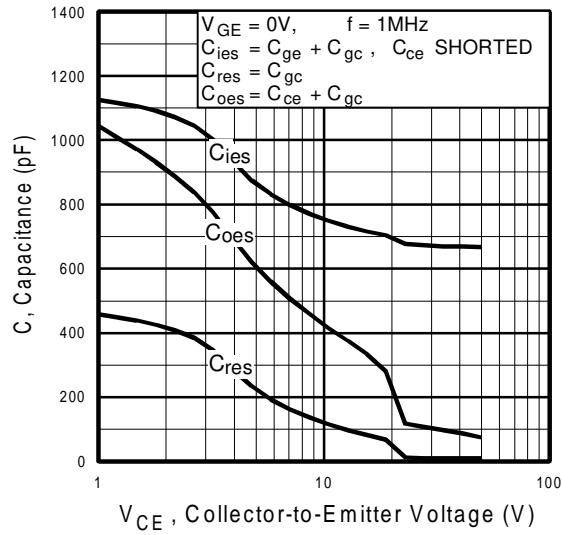


Fig. 7 - Typical Capacitance vs. Collector-to-Emitter Voltage

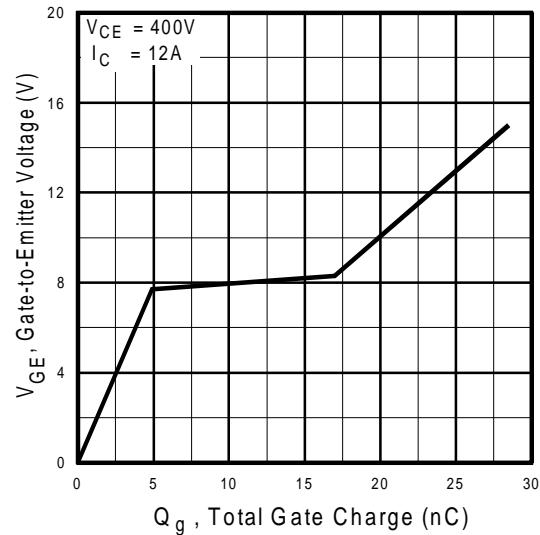


Fig. 8 - Typical Gate Charge vs. Gate-to-Emitter Voltage

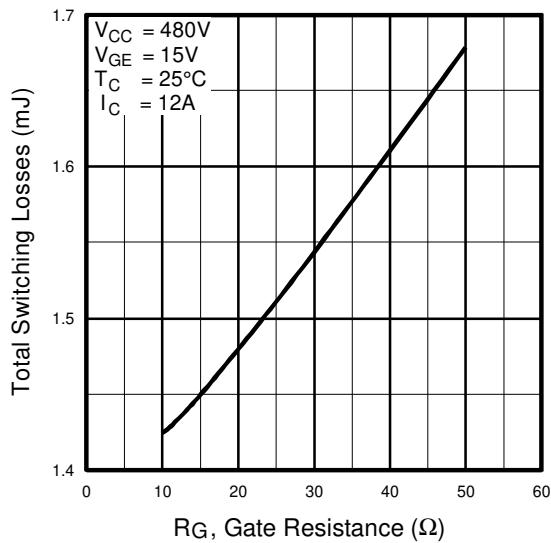


Fig. 9 - Typical Switching Losses vs. Gate Resistance

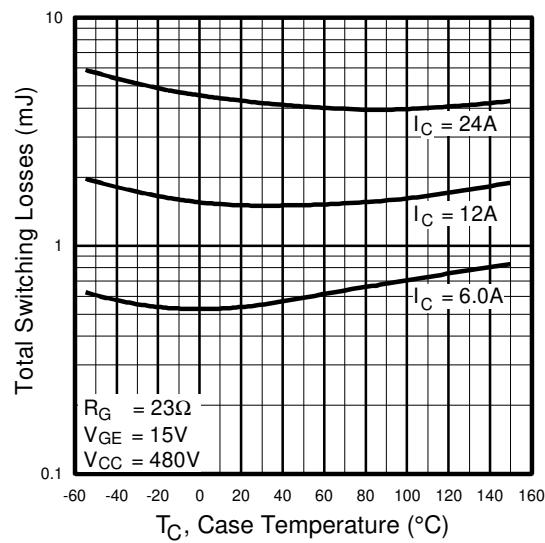


Fig. 10 - Typical Switching Losses vs. Case Temperature

IRGBC30UD2

IR

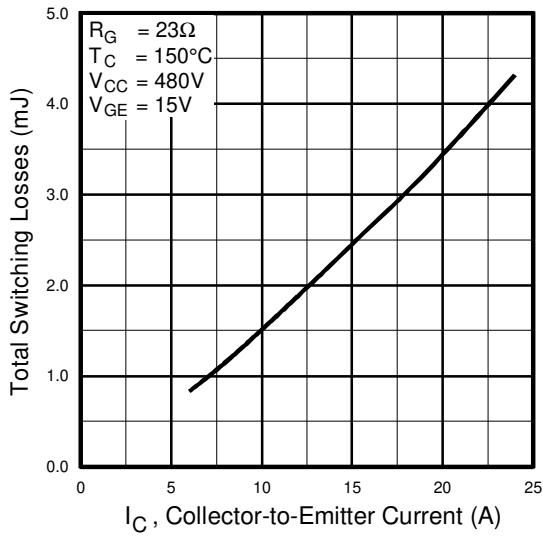


Fig. 11 - Typical Switching Losses vs.
Collector-to-Emitter Current

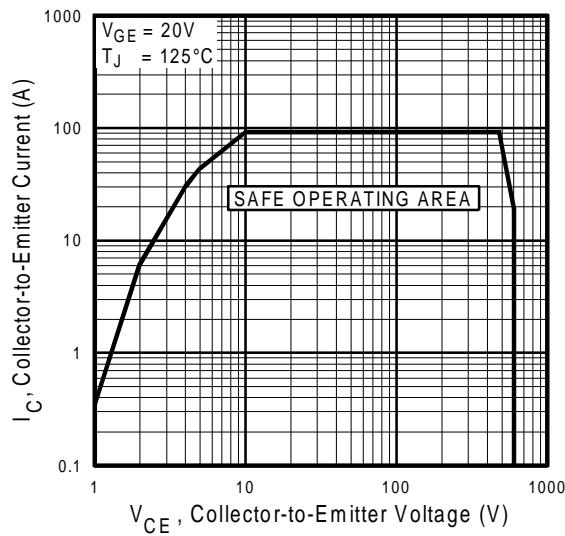


Fig. 12 - Turn-Off SOA

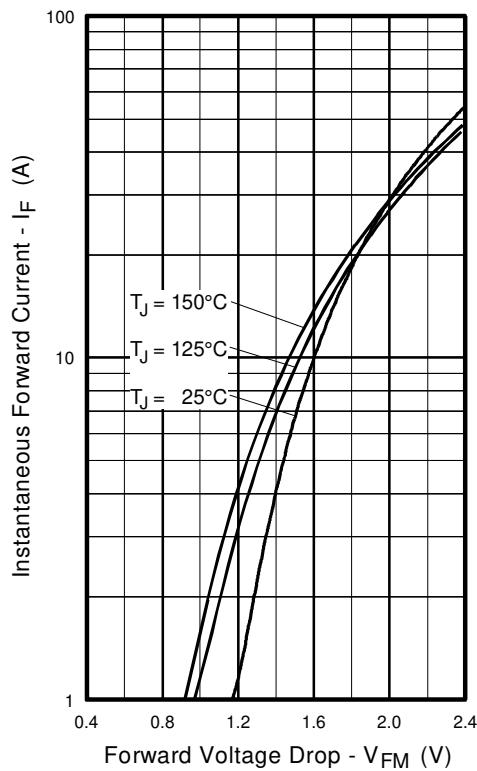


Fig. 13 - Maximum Forward Voltage Drop vs. Instantaneous Forward Current

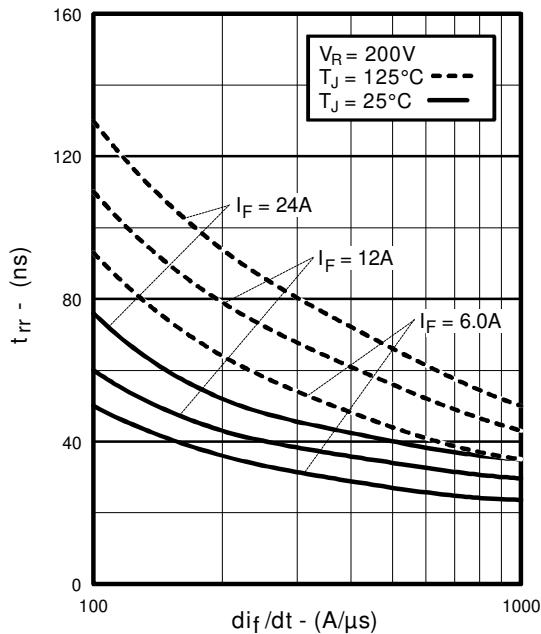


Fig. 14 - Typical Reverse Recovery vs. di_f/dt

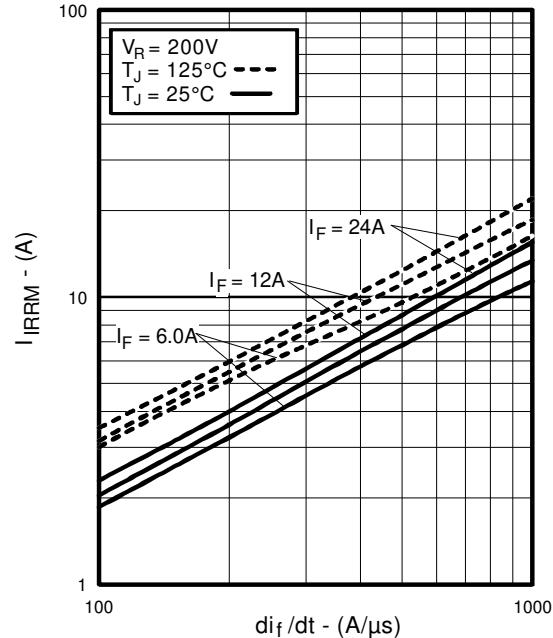


Fig. 15 - Typical Recovery Current vs. di_f/dt

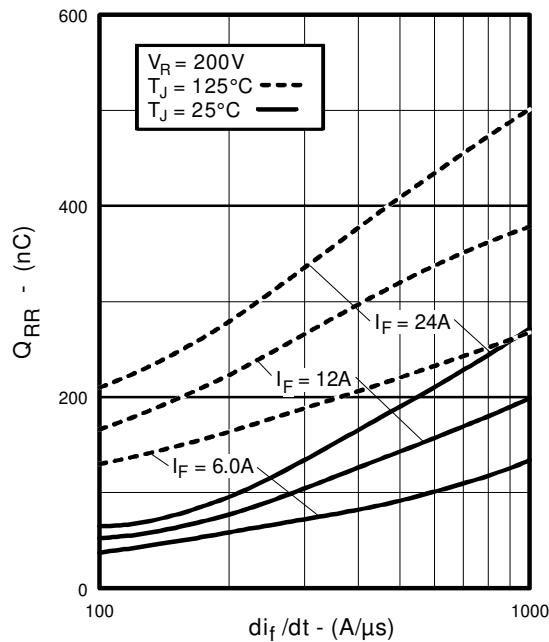


Fig. 16 - Typical Stored Charge vs. di_f/dt

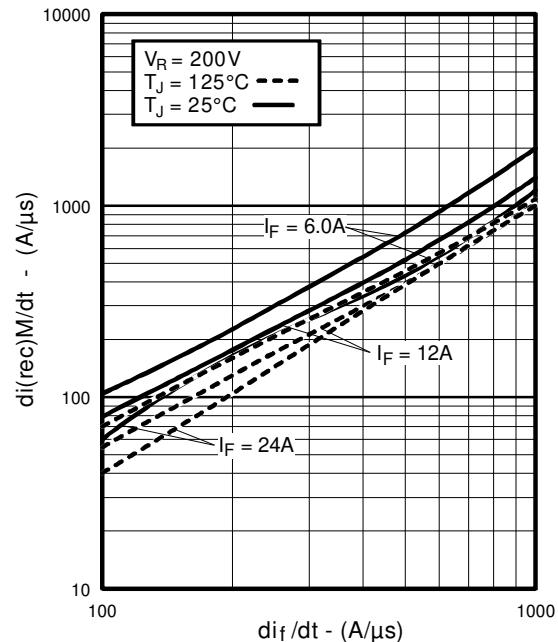


Fig. 17 - Typical $dI_{(rec)}M/dt$ vs. di_f/dt

IRGBC30UD2

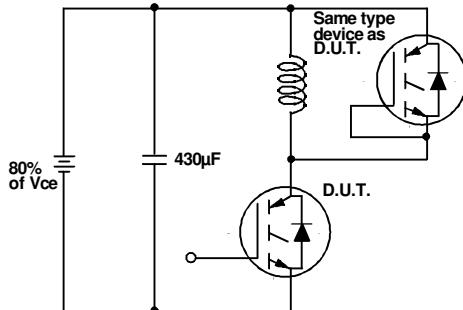


Fig. 18a - Test Circuit for Measurement of I_{LM} , E_{on} , $E_{off(diode)}$, t_{rr} , Q_{rr} , I_{rr} , $I_d(on)$, t_r , $t_d(off)$, t_f

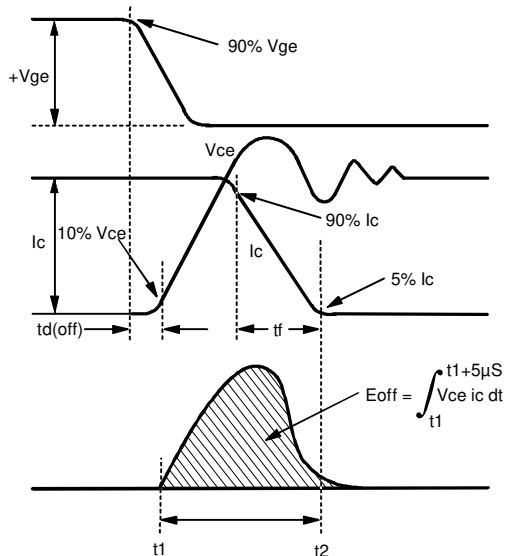


Fig. 18b - Test Waveforms for Circuit of Fig. 18a, Defining E_{off} , $t_{d(off)}$, t_f

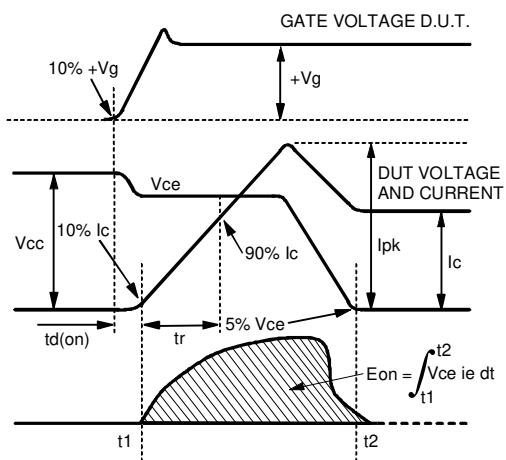


Fig. 18c - Test Waveforms for Circuit of Fig. 18a, Defining E_{on} , $t_{d(on)}$, t_r

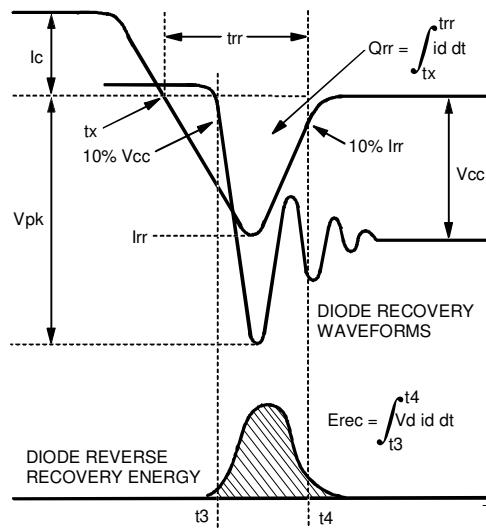


Fig. 18d - Test Waveforms for Circuit of Fig. 18a, Defining E_{rec} , t_{rr} , Q_{rr} , I_{rr}

Refer to Section D for the following:
Appendix D: Section D - page D-6

- Fig. 18e - Macro Waveforms for Test Circuit Fig. 18a
- Fig. 19 - Clamped Inductive Load Test Circuit
- Fig. 20 - Pulsed Collector Current Test Circuit

Package Outline 1 - JEDEC Outline TO-220AB

Section D - page D-12