



Electrical Specifications

Fo: 455 KHz
6dB BW: 200 Hz $\pm 10\%$
Ripple: 0.5 dB Max
Insertion Loss: 4.0 dB Max
60 dBc BW: 800 Hz Max
Goal: Monotonic response in the 6 dB to 60 dB Points
Impedance: 50 Ohms


Mechanical

Package: PC Mount
Dimensions: 2.73 x 0.98 x 0.98 in.

Environmental

Operating Temperature: 0 to +50 Deg. C

Outline Drawing:

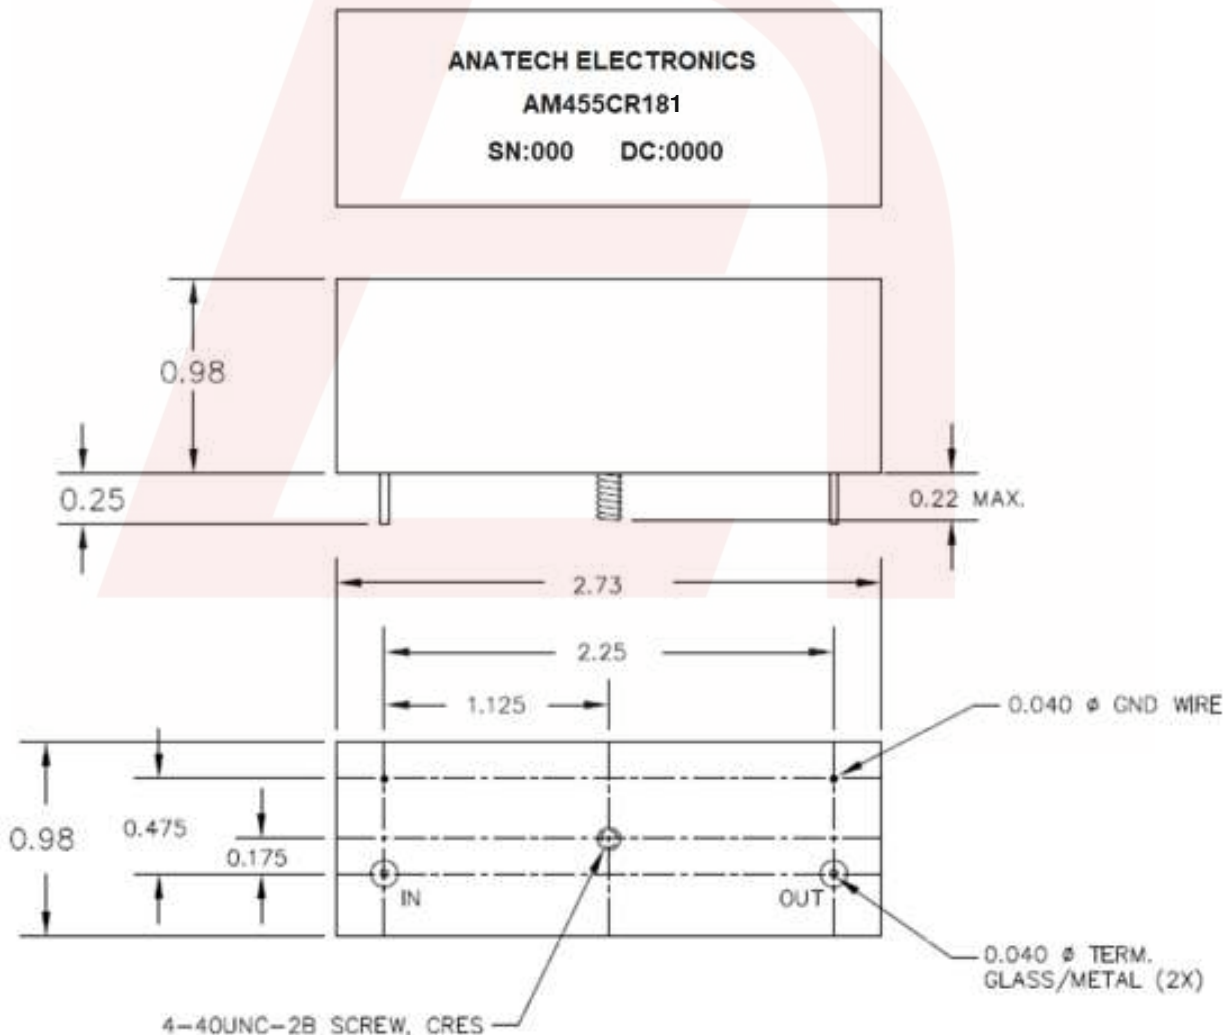

DS-CR181-08202015-Rev0