

AD-662 UCODE DNA

Overview

Frequency Band

UHF 860 - 960 MHz

Chip

NXP UCODE DNA

Antenna Dimensions

90 x 19 mm / 3.54 x 0.75 in

International Standard

ISO/IEC 18000-63 Type C

Industry Segments

Industrial Applications
Sports and Events

Applications

Sports Timing
Asset Tracking
Inventory

RoHS

EU Directive 2011/65/EU and
2015/863 Compliant



Tracking capabilities combined with extra-large user memory

AD-662uDNA inlay from Avery Dennison is a high performing Gen2 UHF RFID design with an extra-large user memory of 3 k-bit and exceptional performance across a wide range of dielectrics.

The inlay is suitable for a wide variety of RFID tagging applications, particularly those related to glass, automotive and industrial asset tracking, and race timing.


AD-662uDNA is equipped with the UCODE DNA chip that comes with 224-bit of EPC memory, exceptional 3 K-bits of user memory, and 96-bit of serialized TID with 96-bit of TID and 48-bit unique serial number. The product is available in Dry Inlay and Wet Inlay delivery formats.

Like all RFID products from Avery Dennison, AD-662uDNA inlays are manufactured according to the industry's highest quality standards, as confirmed by the RFID Lab at Auburn University: The inspection body awarded Avery Dennison its first comprehensive and significant ARC accreditation for quality.


Technical features

Chip	NXP UCODE DNA	
EPC and User Memory	224-bit and 3K-bit	
TID Memory	96-bit / 48-bit unique serial number	
Product Code	RF600923 / IL-607041	RF600870 / IL-607493
Delivery Format	Dry inlay	Wet inlay
Die-Cut Dimension	– 93 x 22 mm / 3.67 x 0.87 in	
Inlay Substrate	Opaque PET	
Total Thickness	10 - 13 mils / 254 - 330 microns	11 - 13 mils / 279 - 330 microns
Standard Pitch	31.75 mm / 1.25 in	
Web Width	98 mm / 3.875 in	
Core Size	76 mm / 3 in	
Quantity / Reel	20000 pcs/reel	10000 pcs/reel
Operating Temperature	-40 °C to 85 °C / -40 °F to 185 °F	
On-Metal	Non metal	

Orientation sensitivity

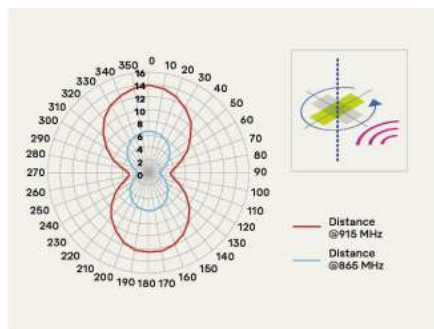

Read range

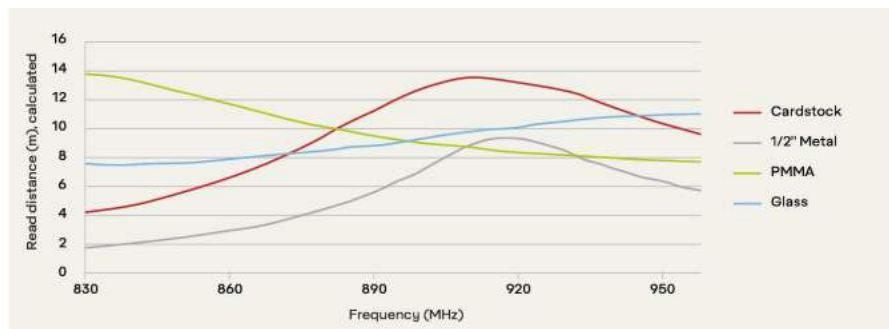

All graphs are indicative: performance in real life applications may vary.

Contact information

rfid.averydennison.com/contact
+1-678-617-2359

Connect with us on:



© 2021 Avery Dennison Corp. All rights reserved. 170 Monarch Lane, Miamisburg, OH 45342, USA Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

Warranty: Please refer to Avery Dennison standard terms and conditions: rfid.averydennison.com/termsandconditions

Care and handling: RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.

