

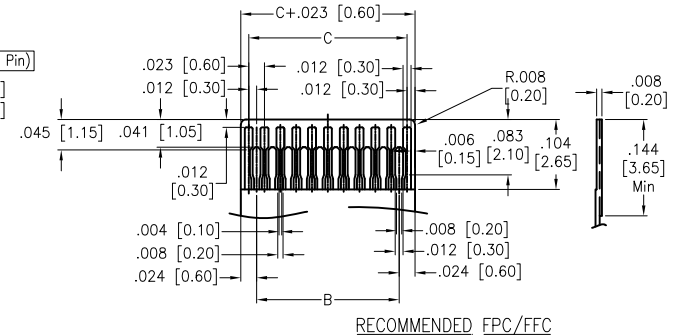
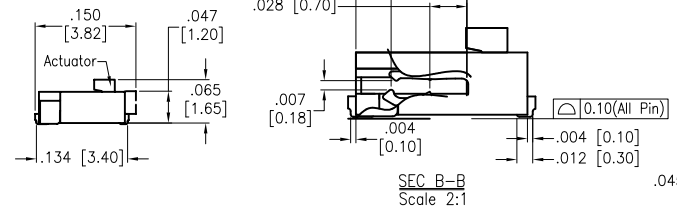
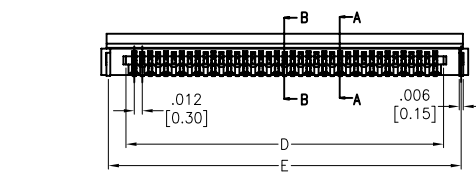
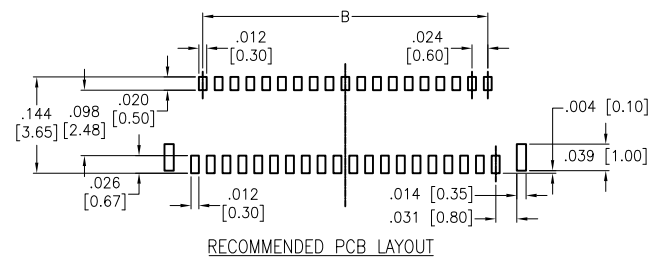


6	5	4	3	2	1
APPROVED: _____			Rev	AWO #	Description
DATE: _____ TITLE: _____			-		RELEASED
					Date
					4/16/19
					Appr

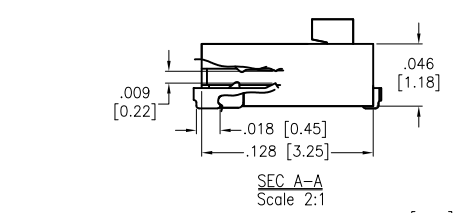

SPECIFICATIONS:

Material:
Housing: Hi-Temp Thermoplastic, rated UL 94V-0, Color: Natural
Actuator: Hi-Temp Thermoplastic, rated UL 94V-0, Color: Black
Contact: Copper Alloy
Holddown: Copper Alloy, Tin plated
Plating:
Gold flash over Nickel underplate overall
Electrical:
Voltage rating: 30V Max
Current rating: 0.3A Max
Contact resistance: 30 mohms max
Insulation resistance: 50 Mohms min
Dielectric withstanding voltage: 250 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant.

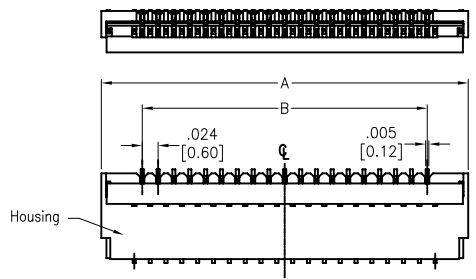

PACKAGED IN TUBES

Positions: 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33
35, 37, 39, 41, 45, 49, 51, 57, 61, 67, 71, 73
A = C + .098 [2.50]
B = C - .024 [0.60]
C = (N-1) X .012 [0.30]
D = C + .024 [0.63]
E = C + .078 [1.97]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES		
.X ± .10	∅X ± .10	HOLES
.XX ± .020	∅XX ± .015	
.XXX ± .015	∅XXX ± .010	
APPROVALS		DATE
DRAWN	SS	4/16/19
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **ZIF FLEX CIRCUIT CONNECTOR**
0.30 MM PITCH, SIDE ENTRY, SMT

SIZE	PART NO.	REV.
X	PCA-7G-XX-HD-3-G	-

REF: S00165C SCALE: NTS SHEET 1 OF 1