
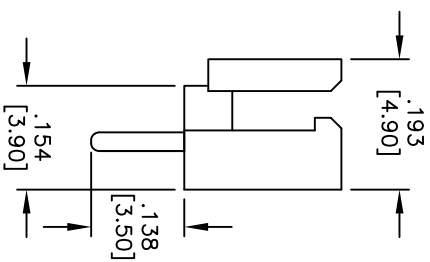
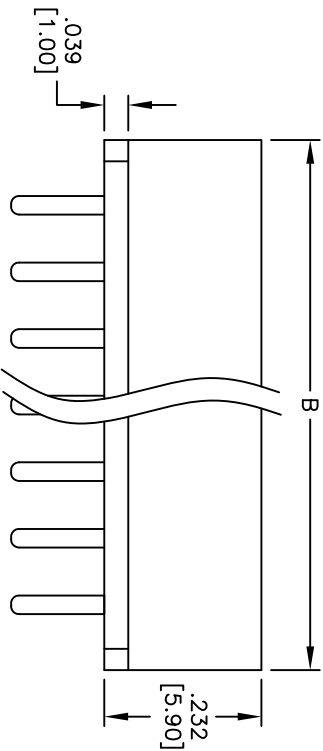
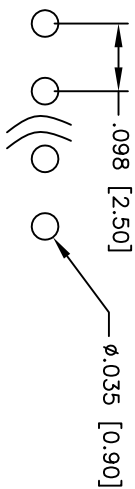


APPROVED: _____
 DATE: _____ TITLE: _____

| Rev | AWO # | Description | Date | Appr |
|-----|-------|---------------|----------|------|
| - | | RELEASED | 1/10/09 | |
| A | | REVISED DIM. | 7/07/10 | |
| B | | REVISED SPEC. | 05/15/12 | |

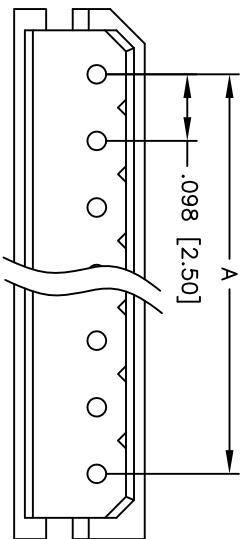

SPECIFICATIONS:

Material: Nylon66, rated UL 94V-0
 Insulator color: Beige
 Contacts: Brass
 Plating: Tin over copper underplate overall.
 Electrical: Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Mechanical: Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS compliant

Positions: 02 thru 20
 A = .098 [2.50] x No. of Spaces
 B = .098 [2.50] x No. of Spaces + .197 [5.00]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLE SIZES
 .X ±.10 ØXX ±.10
 .XX ±.020 ØXXX ±.015
 .XXX ±.015 ØXXXX ±.010
 APPROVALS: DATE

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: .098 [2.50] PITCH WAFER, STRAIGHT PCB
 LOW PROFILE

| | | | | | |
|----------|----|---------|------|--------------|------|
| DRAWN | DY | 1/10/09 | SIZE | PART NO. | REV. |
| CHECKED | | | X | 25SH-E-XX-TS | B |
| APPROVED | | | REF: | S00723T | |

