

AMP | AMPSEAL 16 TE Internal #: 2040594-5 Housing for Male Terminals, Wire-to-Wire, 8 Position, .177 in [4.5 mm] Centerline, Sealable, Black, -40 – 257 °F [-40 – 125 °C], AMPSEAL 16

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > AMPSEAL 16 Housings



Connector System: Wire-to-Wire

Number of Positions: 8

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 4.5 mm [.177 in]

Sealable: Yes

All AMPSEAL 16 Housings (226)

connectivity

Features

Product Type Features

Hybrid Connector	No	
Connector Shape	Rectangular	
Connector System	Wire-to-Wire	
Connector & Housing Type	Housing for Male Terminals	
Sealable	Yes	
Primary Locking Feature	Integrated in Housing	
Configuration Features		
Number of Positions	8	
Number of Rows	2	
Body Features		
Primary Product Color	Black	
Contact Features		

Housing for Male Terminals, Wire-to-Wire, 8 Position, .177 in [4.5 mm] Centerline, Sealable, Black, -40 – 257 °F [-40 – 125 °C], AMPSEAL 16



Contact Size	Size 16	
Contact Type	Pin	
Mating Pin Diameter	1.5 mm[.059 in]	
Mechanical Attachment		
Terminal Position Assurance	No	
Mating Alignment Type	Polarizing Tab	
Mating Alignment	With	
Housing Features		
Centerline (Pitch)	4.5 mm[.177 in]	
Usage Conditions		
Operating Temperature (Max)	70 °C, 75 °C, 81 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[158 °F][172 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F]	
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]	
Industry Standards		
Degree of Protection	IP67	
UL Flammability Rating	UL 94HB	

Packaging Features

Packaging Quantity	200	
Packaging Method	Box	
Other		
Connector Position Assurance Capable	Yes	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per	

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 8 Position, .177 in [4.5 mm] Centerline, Sealable, Black, -40 – 257 °F [-40 – 125 °C], AMPSEAL 16



homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



TE Part # CAT-AM7801-CH8172 AMPSEAL 16 Housings



TE Part # CAT-AM7801-B128 AMPSEAL 16 Connectors Backshell




TE Part # CAT-AM7801-T273 Contacts: Size 16, 13A



TE Part # 1924487-3 MOUNTING CLIP, AMPSEAL 16





Also in the Series AMPSEAL 16

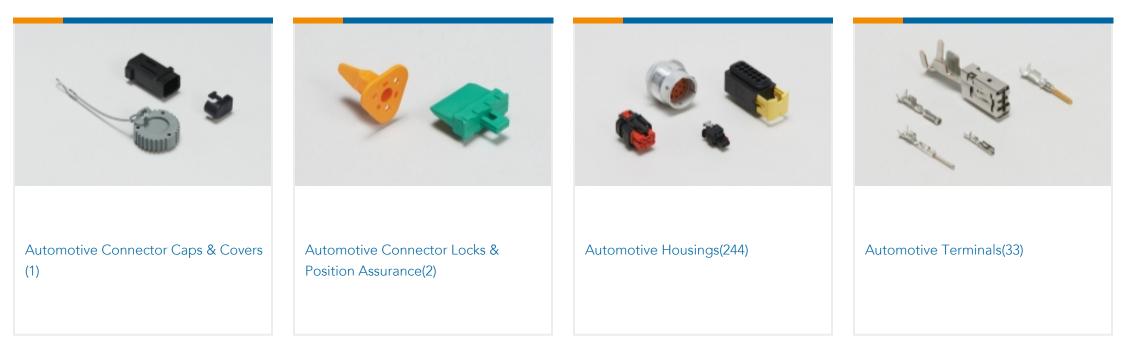

Housing for Male Terminals, Wire-to-Wire, 8 Position, .177 in [4.5 mm] Centerline, Sealable, Black, -40 – 257 °F [-40 – 125 °C], AMPSEAL 16



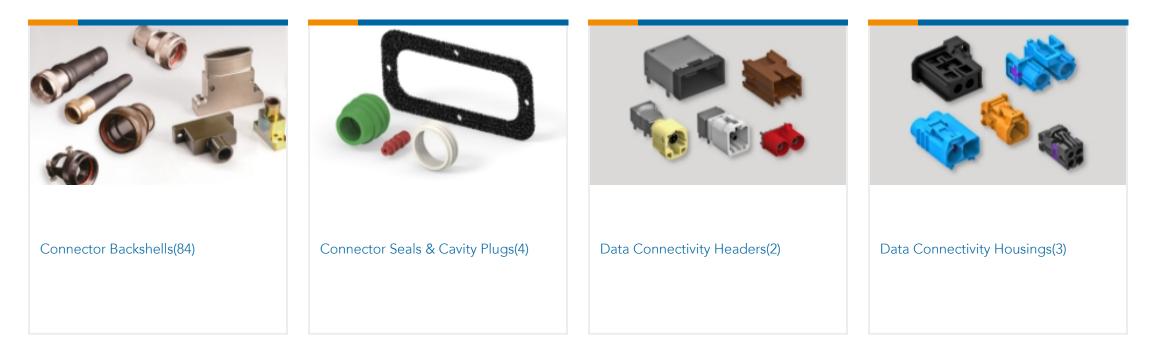

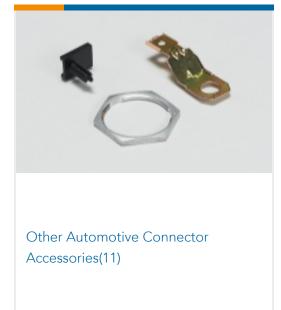

Customers Also Bought



AMPSEAL 16 Housings	SOC, SF, SIZE 16, 16-18 AWG, AU/SN	AMPSEAL 16 Connectors Backshell	62POS,HYBRID,REC HSG ASSY,SLD, COD C
Des			
0			

Documents

TE Part #C34252-000

ES1000-NO.3-B8-X-55MM

0

Product Drawings SEAL CAP HSG 8P, AMPSEAL16 SEA

Japanese

CAD Files

Customer View Model

ENG_CVM_CVM_2040594-5_D.2d_dxf.zip

English

3D PDF

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 8 Position, .177 in [4.5 mm] Centerline, Sealable, Black, -40 – 257 °F [-40 – 125 °C], AMPSEAL 16



3D

Customer View Model ENG_CVM_CVM_2040594-5_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2040594-5_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the $\ensuremath{\mathsf{Terms}}\xspace$ and $\ensuremath{\mathsf{Conditions}}\xspace$ of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

Product Specifications AMPSEAL SEAL CAP

Japanese

Product Specification

Japanese