
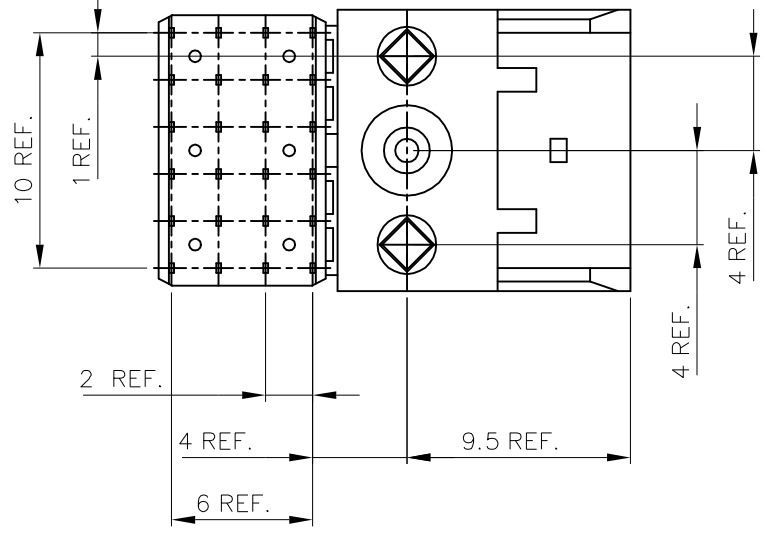
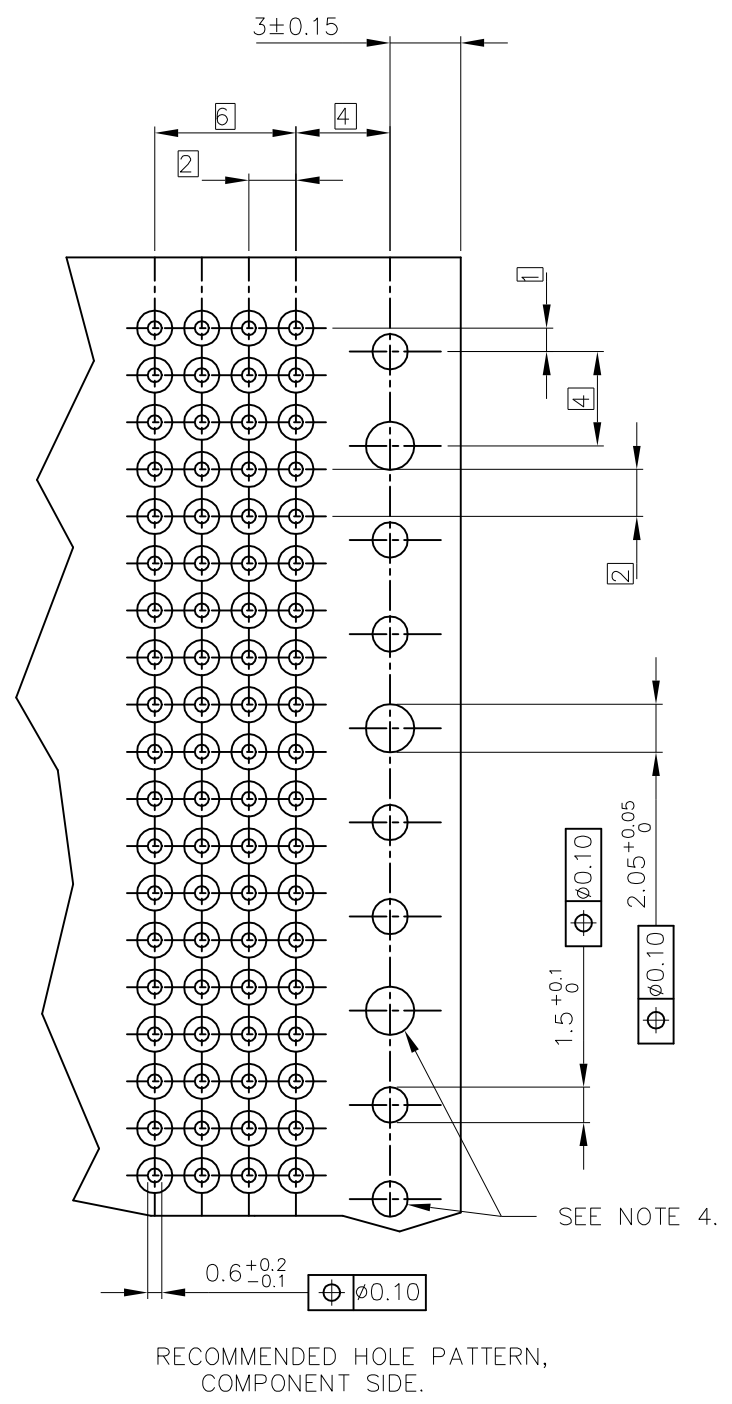
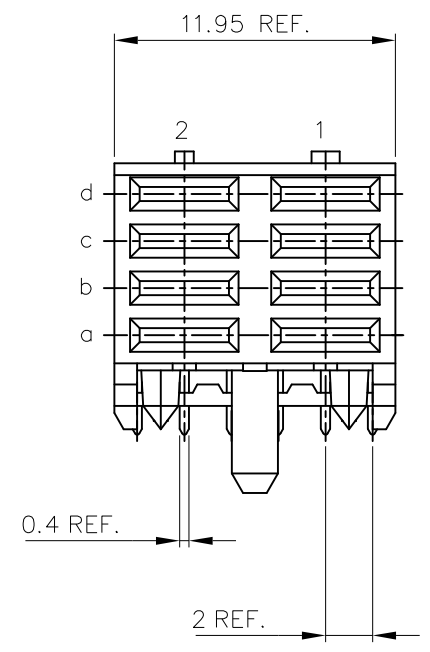



PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY	TELCORDIA CO
-2YY	CUSTOMER SPECIAL
-3YY	CUSTOMER SPECIAL
-9YY	TELCORDIA CO
-2YYLF	CUSTOMER SPECIAL
-9YYLF	TELCORDIA CO
-1YYLF	TELCORDIA CO
-3YYLF	CUSTOMER SPECIAL

OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE

PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70231-X01LF	1.6	2.90
70231-X11LF	2.4	3.53

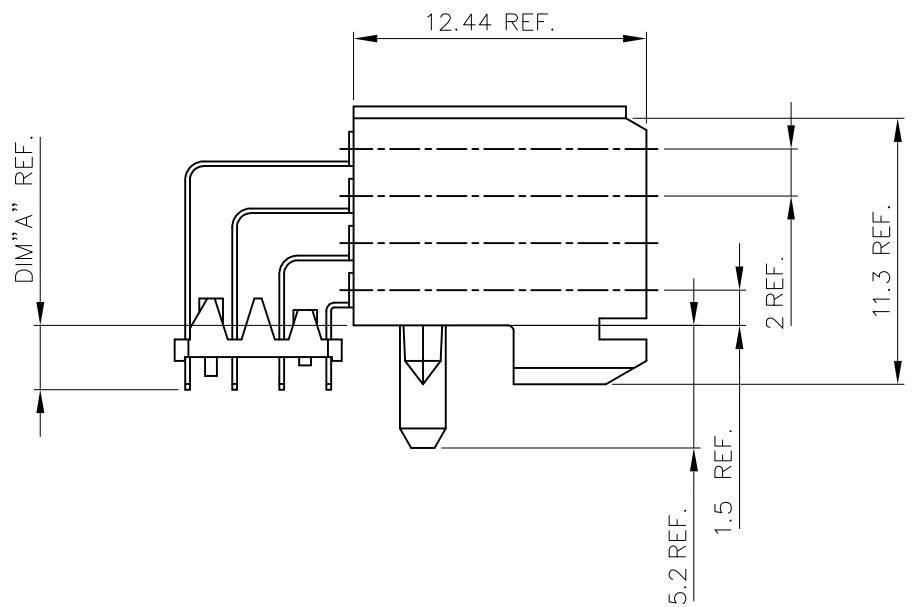

PRODUCT AFTER HOT RIVETTING.

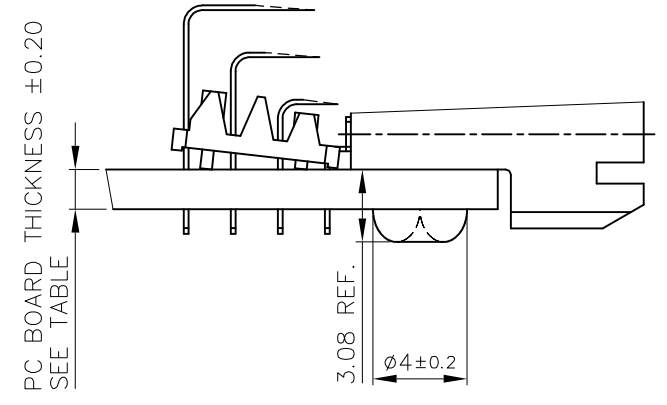

- NOTES:
- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
 - 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - 3 INDICATED HOLES ARE UNPLATED.
 - 4 PRODUCTMARKING: PARTNUMBER & BATCH ID.
 - 5 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 - 6 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
 - 7 THE PRODUCT SPECIFICATION GS-12-453.
 - 8 FOR THE PRODUCT WITH 30u" GOLD PLATING IN TERMINAL, THEY CAN BE REPLACED BY 30 GXT PLATING.

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection		product family METRAL (tm)	
ltr	ecn no	dr	date	tolerances unless otherwise specified				MM		title	
K	DG05-0107	CLU	2005-05-10	angles	linear	0.X ±0.30		scale 5:1		RA FEMALE POWER STB 12MM VERSION	
L	DG07-0458	CEN	2007-11-15	0° ±2'		0.XX ±0.15					
M	N11-0131	A.ZH	2011-05-09			0.XXX ±0.05					
N	ELX-N-004584	A.ZH	2011-07-20	dr	R.TRLPPE	1990-09-18		Amphenol FCI		dwg no sheet 1 of 2 size	
P	ELX-N-26608	MZ	2017-03-24	enrg	BOUWKNEGT	1990-09-18				70231 A3	
				chr	VAN ZANTEN	1990-09-18				type Product Customer Drawing	
sheet index		revision sheet		P	P						
				1	2						

Amphenol FCI






© 2016 AFCI

PLATING CONTACT AREA:


DASH NR:	PERFORMANCE LEVEL	
-1YY	TELCORDIA CO	OBSOLETE
-2YY	CUSTOMER SPECIAL	OBSOLETE
-3YY	CUSTOMER SPECIAL	OBSOLETE
-9YY	TELCORDIA CO	OBSOLETE
-2YYLF	CUSTOMER SPECIAL	OBSOLETE
-9YYLF	TELCORDIA CO	OBSOLETE
-1YYLF	TELCORDIA CO	OBSOLETE
-3YYLF	CUSTOMER SPECIAL	OBSOLETE

PC BOARD VERSIONS

PRODUCTNR:	PCB THICKNESS	DIM "A"
70231-X02LF	1.6	2.90
70231-X12LF	2.4	3.53

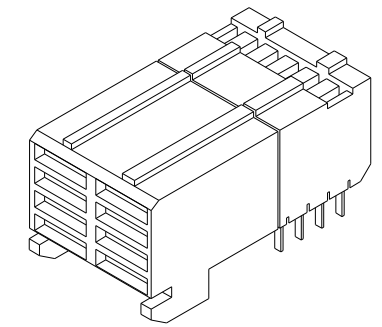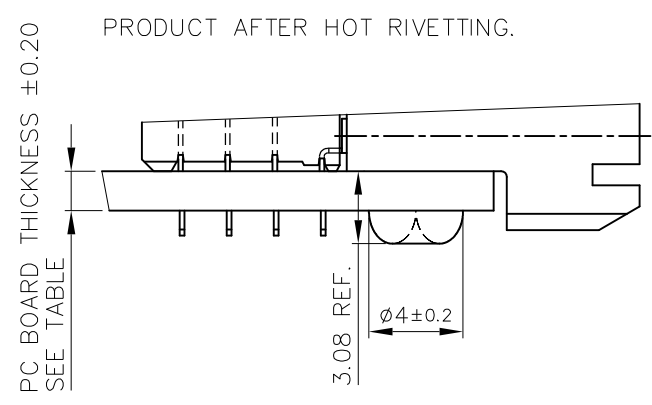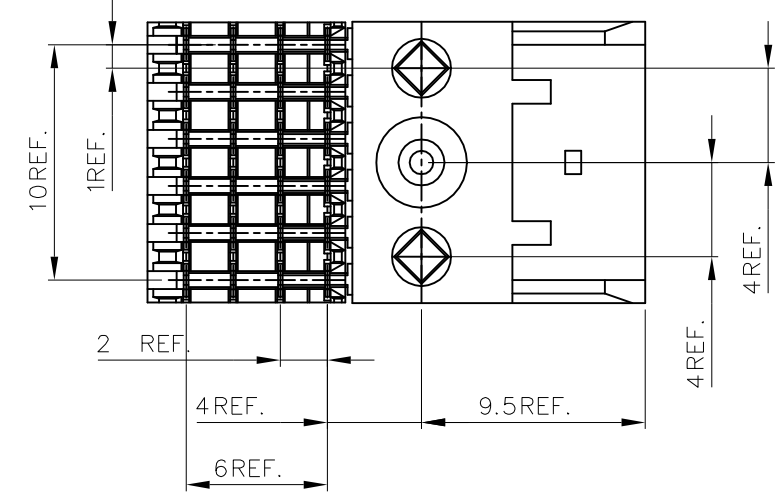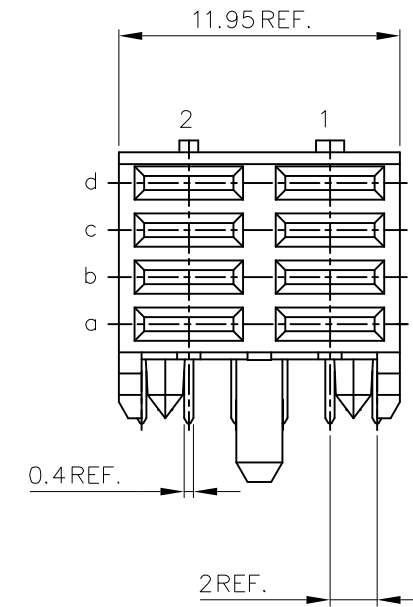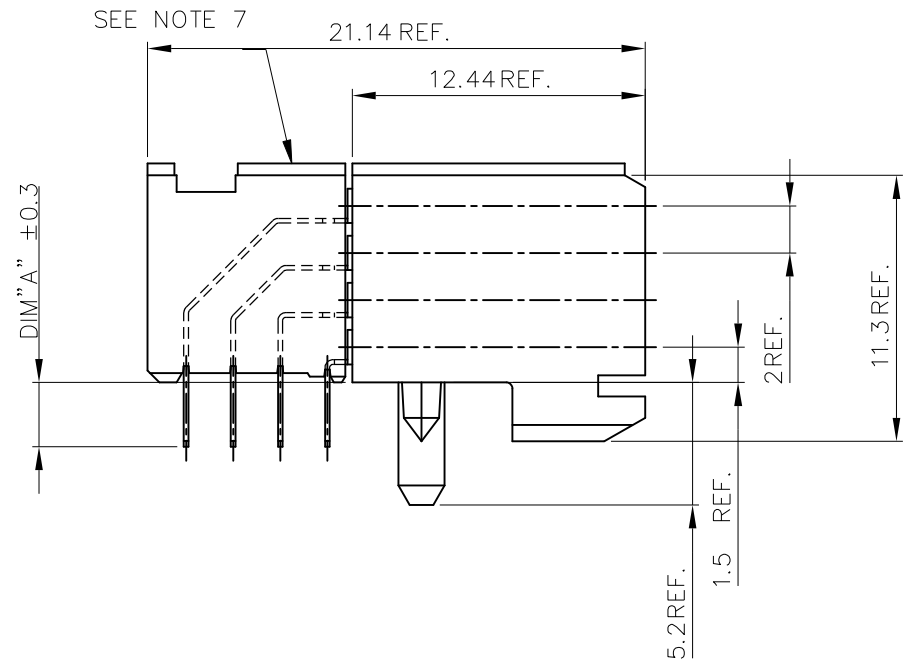

14.64 REF. SEE NOTE 6

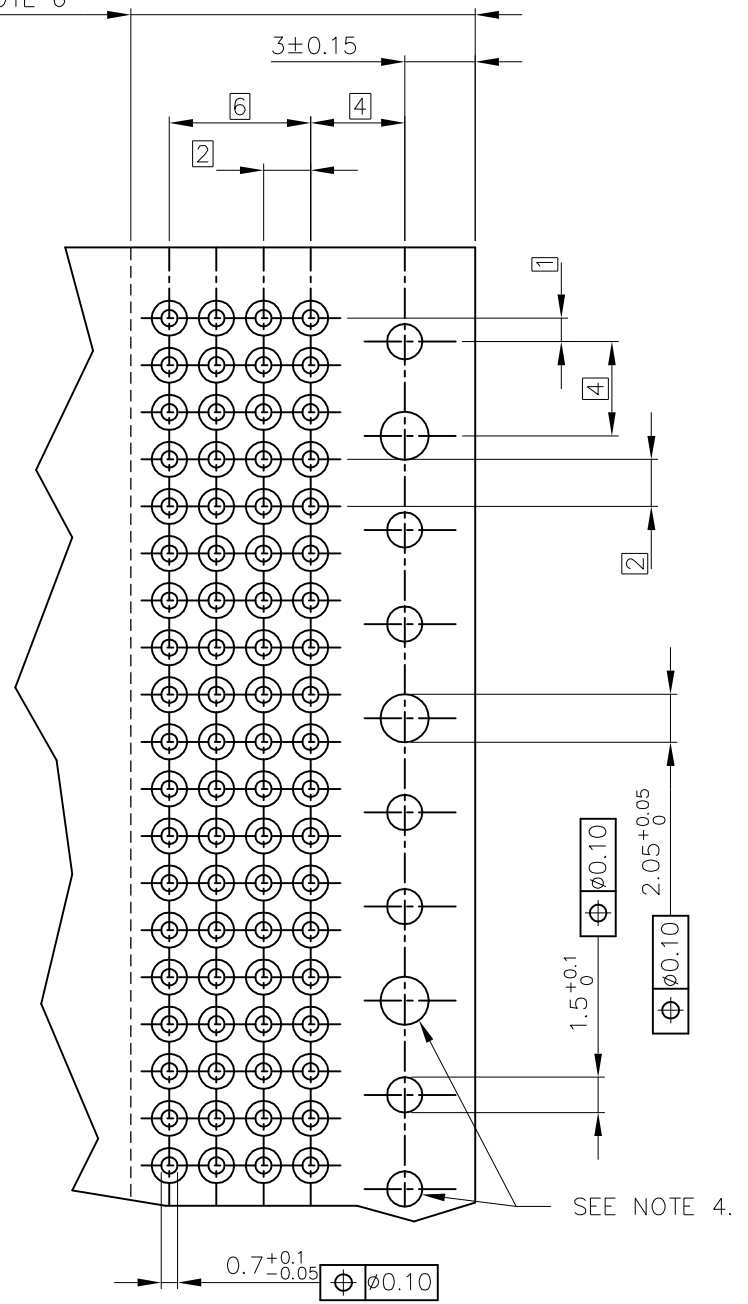

RECOMMENDED HOLE PATTERN, COMPONENT SIDE.

- NOTES:
- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
 - TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - INDICATED HOLES ARE UNPLATED.
 - PRODUCT MARKING: PARTNUMBER & BATCH ID.
 - SET BACK FOR PRESS BLOCK.
 - TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD
 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
 - THE PRODUCT SPECIFICATION GS-12-453.
 - FOR THE PRODUCT WITH 30u" GOLD PLATING IN TERMINAL, THEY CAN BE REPLACED BY 30 GXT PLATING.

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection		product family METRAL (tm)	
ltr ecn no dr date				tolerances unless otherwise specified		angles linear		MM		title	
P						0.X ±0.30				RA FEMALE POWER STB 12MM VERSION	
						0.XX ±0.15				dwg no sheet 2 of 2 size	
						0.XXX ±0.05		scale 5:1		70231 A3	
				dr R.TRLPPE 1990-09-18				Amphenol FCI		type Product Customer Drawing	
				enr BOUWKNEG 1990-09-18							
				chr VAN ZANTEN 1990-09-18							
				appd VAN ZANTEN 1990-09-18							
sheet index		revision sheet									