


POS. PER ROW	L +0.3 -0.6	PART NUMBER	POS. PER ROW	L +0.3 -0.6	PART NUMBER
-	2	827 988-1	-26	66.04	2- 827 988-6
2	5.08	827 988-2	-27	68.58	2- -7
3	7.62		-28	71.12	2- -8
4	10.16		-29	73.66	2- -9
5	12.70		-30	76.20	3- -0
6	15.24		-31	78.74	3- -1
7	17.78		-32	81.28	3- -2
8	20.32		-33	83.82	3- -3
9	22.86		-34	86.36	3- -4
10	25.40	1	-35	88.90	3- -5
11	27.94	1	-36	91.44	3- -6
12	30.48	1	-37	93.98	3- -7
13	33.02	1	-38	96.52	3- -8
14	35.56	1	-39	99.06	3- -9
15	38.10	1	-40	101.60	4- 0
16	40.64	1	-41	104.14	4- -1
17	43.18	1	-42	106.68	4- -2
18	45.72	1	-43	109.22	4- -3
19	48.26	1	-44	111.76	4- -4
20	50.80	2	-45	114.30	4- -5
21	53.34	2	-46	116.84	4- -6
22	55.88	2	-47	119.38	4- -7
23	58.42	2	-48	121.92	4- 8
24	60.96	2	-49	124.46	4- -9
25	63.50	2-827 988-5	-50	127.00	5- 827 988-0

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	CONTACT PIN MATERIAL AND PLATING CHANGE	21JUL2014	KJK	JK
	D1	NOTE 1 0.76 µm PLATING UPDATE (Pd)	14JUL2023	BGC	PS

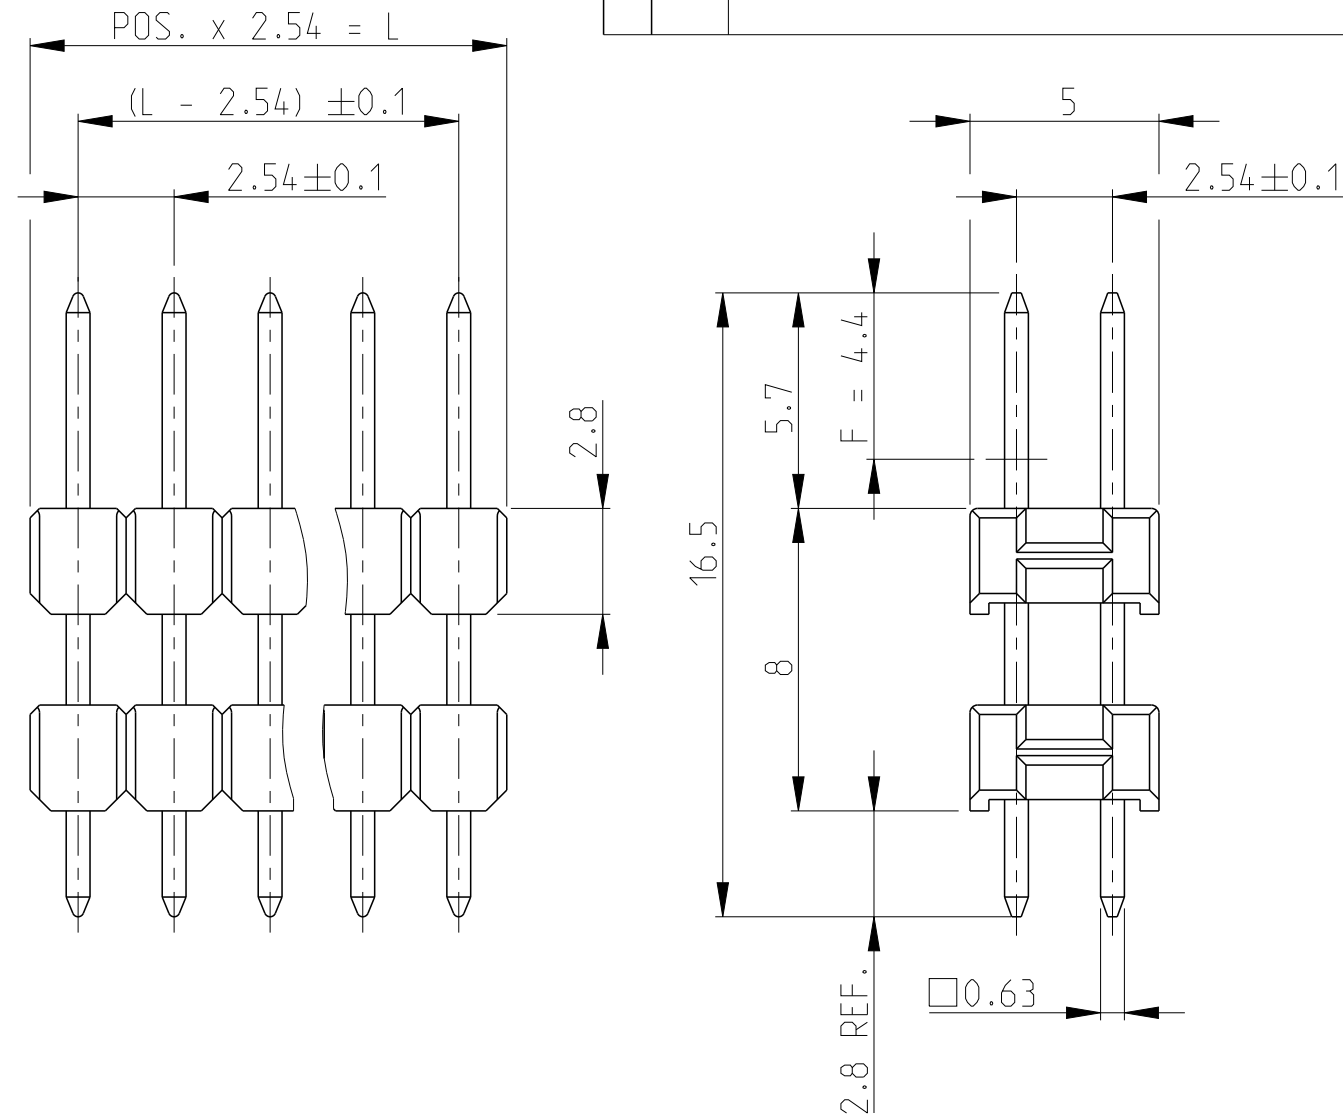

3 OBSOLETE


1 MATING SIDE: MIN 0.76 µm (PdNi + Au FLASH)
BY AREA "F" OVER 1.27 µm NICKEL
(Alternative plating - Min 0.76 µm Au OVER 1.27 µm Ni)
SOLDER SIDE: MIN. 3 µm TIN OVER 1.27 µm NICKEL

3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

2 827988-1 SUPERSEDED BY 2-827988-0

4 OBSOLETE

1	CuZn	CONTACT PIN KONTAKTSTIFT
COLOUR GREEN	PBT	PIN HOUSING STIFTGEHAEUSE
REMARK BEMERKUNG	MATERIAL	DESCRIPTION BEZEICHNUNG

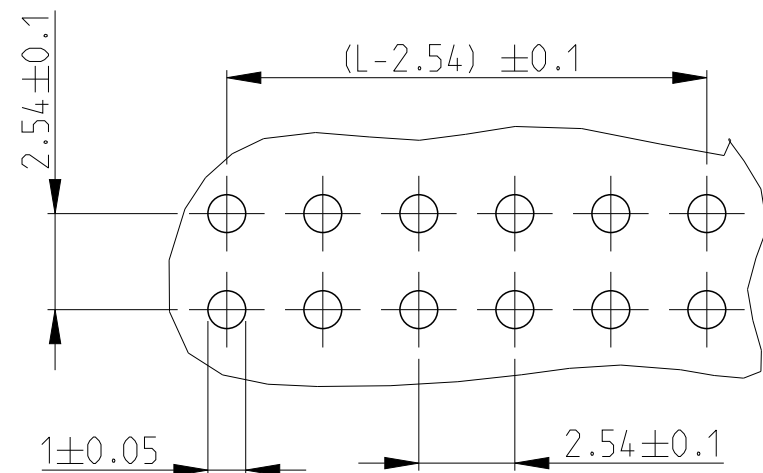

PC BOARD LAYOUT
LEITERPLATTEN-
ANSCHLUSSBILD

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G.HOLAUS 17 JUL 1989	TE Connectivity				
DIMENSIONS: mm		CHK M.SCHAARSCHMIDT -					
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2mm		APVD -	NAME AMPMODU II SPECIAL PIN HEADER DUAL ROW				
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 108-18012	SIZE A3	CAGE CODE 00779	DRAWING NO. ©-827988	RESTRICTED TO -	
MATERIAL SEE TABLE		FINISH SEE TABLE	WEIGHT -	SCALE 5:1		SHEET 1 OF 1	REV D1
CUSTOMER DRAWING			SCALE 5:1 SHEET 1 OF 1 REV D1				