

Buchanan

TE Internal #: 282832-3


PCB Terminal Blocks, Header, Wire-to-Board, 3 Position, .197 in [5 mm] Centerline, 1 Row, Operating Voltage 300 VAC, Printed Circuit

Board

View on TE.com >



Connectors > Terminal Blocks & Strips > PCB Terminal Blocks

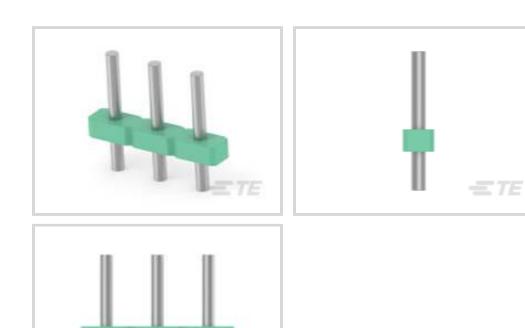

Terminal Block Connector Type: Header

Connector System: Wire-to-Board

Number of Positions: 3

Centerline (Pitch): 5 mm [.197 in]

Number of Rows: 1

Features

Product Type Features

Header Type	Unshrouded
Terminal Block Connector Type	Header
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Positions	3
Number of Rows	1
Electrical Characteristics	
Operating Voltage	300 VAC
Body Features	
Primary Product Color	Green
Product Orientation	Vertical

=TE



Contact Mating Area Length 7 mm[.275 in] Contact Mating Area Plating Material Tin Contact Base Material Brass Contact Current Rating (Max) 15 A Termination Features Termination Post & Tail Length 3.5 mm[.138 in] Termination Method to Printed Circuit Board Through Hole - Solder Termination Method to Wire & Cable Push-in Mechanical Attachment Connector Mounting Type Board Mount Housing Features Housing Material PA 66 Centerline (Pitch) 5 mm[.197 in] Usage Conditions Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Circuit Application Power & Signal Packaging Features Packaging Ouantity 300		
Contact Current Rating (Max) 15 A Termination Features Termination Post & Tail Length 3.5 mm[.138 in] Termination Method to Printed Circuit Board Termination Method to Wire & Cable Push-in Mechanical Attachment Connector Mounting Type Board Mount Housing Features Housing Material PA 66 Centerline (Pitch) 5 mm[.197 in] Usage Conditions Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Circuit Application Power & Signal Packaging Features	Contact Mating Area Length	7 mm[.275 in]
Contact Current Rating (Max) Termination Features Termination Post & Tail Length Termination Method to Printed Circuit Board Termination Method to Wire & Cable Push-in Mechanical Attachment Connector Mounting Type Board Mount Housing Features Housing Material PA 66 Centerline (Pitch) S mm[.197 in] Usage Conditions Operation/Application Circuit Application Packaging Features	Contact Mating Area Plating Material	Tin
Termination Features Termination Post & Tail Length 3.5 mm[.138 in] Termination Method to Printed Circuit Board Through Hole - Solder Termination Method to Wire & Cable Push-in Mechanical Attachment Connector Mounting Type Board Mount Housing Features Housing Material PA 66 Centerline (Pitch) 5 mm[.197 in] Usage Conditions Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Circuit Application Power & Signal Packaging Features	Contact Base Material	Brass
Termination Post & Tail Length Termination Method to Printed Circuit Board Termination Method to Wire & Cable Push-in Mechanical Attachment Connector Mounting Type Board Mount Housing Features Housing Material Centerline (Pitch) PA 66 Centerline (Pitch) Usage Conditions Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Circuit Application Power & Signal Packaging Features	Contact Current Rating (Max)	15 A
Termination Method to Printed Circuit Board Termination Method to Wire & Cable Push-in Mechanical Attachment Connector Mounting Type Board Mount Housing Features Housing Material PA 66 Centerline (Pitch) 5 mm[.197 in] Usage Conditions Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Circuit Application Packaging Features	Termination Features	
Termination Method to Wire & Cable Mechanical Attachment Connector Mounting Type Board Mount Housing Features Housing Material PA 66 Centerline (Pitch) 5 mm[.197 in] Usage Conditions Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Circuit Application Power & Signal Packaging Features	Termination Post & Tail Length	3.5 mm[.138 in]
Mechanical Attachment Connector Mounting Type Board Mount Housing Features Housing Material PA 66 Centerline (Pitch) Usage Conditions Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Circuit Application Power & Signal Packaging Features	Termination Method to Printed Circuit Board	Through Hole - Solder
Connector Mounting Type Housing Features Housing Material PA 66 Centerline (Pitch) 5 mm[.197 in] Usage Conditions Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Circuit Application Power & Signal Packaging Features	Termination Method to Wire & Cable	Push-in
Housing Features Housing Material PA 66 Centerline (Pitch) 5 mm[.197 in] Usage Conditions Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Circuit Application Power & Signal Packaging Features	Mechanical Attachment	
Housing Material PA 66 Centerline (Pitch) 5 mm[.197 in] Usage Conditions Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Circuit Application Power & Signal Packaging Features	Connector Mounting Type	Board Mount
Centerline (Pitch) Usage Conditions Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Circuit Application Power & Signal Packaging Features	Housing Features	
Usage Conditions Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Circuit Application Power & Signal Packaging Features	Housing Material	PA 66
Operating Temperature Range -40 – 105 °C[-40 – 221 °F] Operation/Application Circuit Application Power & Signal Packaging Features	Centerline (Pitch)	5 mm[.197 in]
Operation/Application Circuit Application Power & Signal Packaging Features	Usage Conditions	
Circuit Application Power & Signal Packaging Features	Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Packaging Features	Operation/Application	
	Circuit Application	Power & Signal
Packaging Quantity 300	Packaging Features	
	Packaging Quantity	300

Product Compliance

Packaging Method

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Box



Solder Process Capability

Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



TERMI-BLOK PLUG 90&180 3P. 5



TE Part # 1776489-3 Unshrouded Header, 5.0mm, Blue










TE Part # 1986943-3 TERMI-BLOK PLUG STR 5MM MODULAR 3POS



TE Part # 1986945-3 TERMI-BLOK PLUG 90&270DEG 5MM MODUL 3P



Customers Also Bought

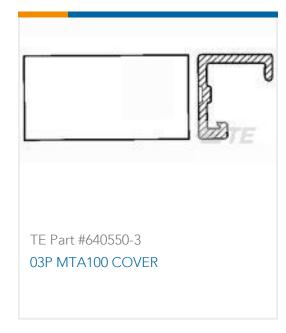













TE Part #9D-BBK-T-001S-000

0.15PSID, mV, DUAL HORIZONTAL,
TAPE&REEL





Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_282832-3_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_282832-3_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_282832-3_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

1-1773458-1_EURO_STYLE_TERMINAL_BLOCKS_QRG

English

Product Specifications

Application Specification

English

Product Environmental Compliance

Product Compliance Document

English

Product Compliance Document

English

PCB Terminal Blocks, Header, Wire-to-Board, 3 Position, .197 in [5 mm] Centerline, 1 Row, Operating Voltage 300 VAC, Printed Circuit Board



Agency Approvals

UL

English