


PART NO.		<b>RFU-630</b>	
REV	DESCRIPTION	DWN	DATE
E	UPDATED CONNECTOR DESIGN & SPECS	CZS	10/01/20
			APPROVED
			JDMc

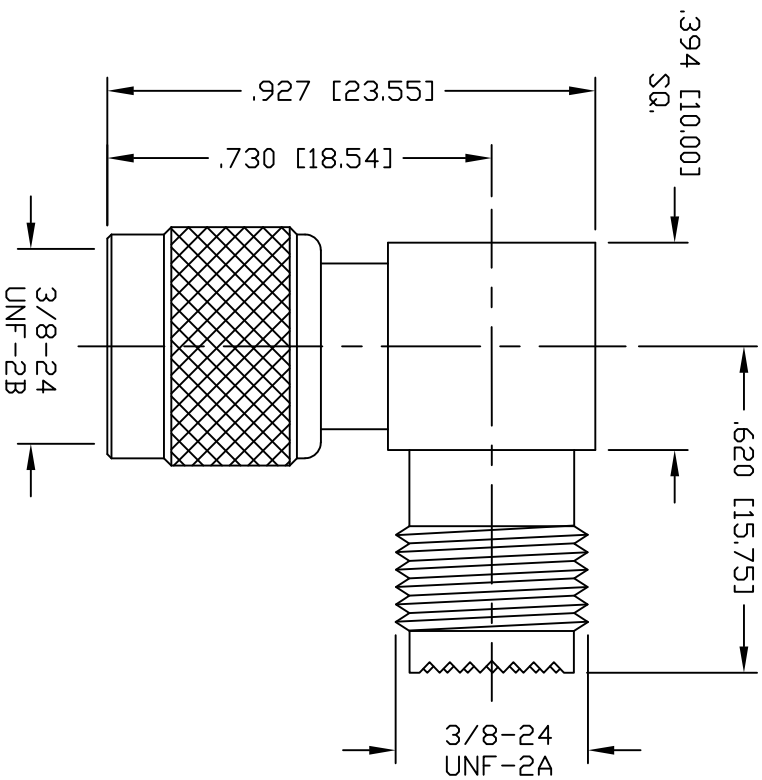

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms  
 FREQUENCY RANGE: 0-2.5 GHz  
 WORKING VOLTAGE: 335 V rms Max. @ Sea Level  
 INSULATION RESISTANCE: 5k M Ohms min.  
 TEMPERATURE RANGE: -65°C TO 165°C

7	SHELL	1	SHELL	NICKEL
6	INSULATOR	1	PTFE	NATURAL
5	INSULATOR	1	PTFE	NATURAL
4	CONTACT	1	BRASS	GOLD
3	PIN	1	BRASS	GOLD
2	PRESS FIT BODY	1	BRASS	NICKEL
1	BODY	1	BRASS	NICKEL
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER  
 OUTLINE DRAWING  
 ALL DIMENSIONS  
 ARE REFERENCE ONLY  
 UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES  
 AND [MILLIMETERS]

DRW  
 C. ZUNIGA  
 CHECKED  
 ORG DRAWN  
 C. ZUNIGA  
 8/20/85

**ROHS COMPLIANT**

PROPRIETARY AND CONFIDENTIAL  
 THIS DRAWING CONTAINS  
 INFORMATION PROPRIETARY TO  
 RF INDUSTRIES, ANY  
 UNAUTHORIZED USE OF THIS  
 DRAWING IS EXPRESSLY  
 PROHIBITED WITHOUT WRITTEN  
 PERMISSION FROM RF  
 INDUSTRIES. ANY VIOLATION IS  
 PUNISHABLE UNDER U.S.  
 COPYRIGHT LAWS.

**RF Industries**  
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

**MINI UHF PLUG TO JACK**  
 RIGHT ANGLE ADAPTER

RFINDUSTRIES.COM  
 7610 MIRAMAR RD.  
 SAN DIEGO, CA 92126  
 (858) 549-6340

CABLE GROUP DWG NO.  
 N/A  
 RFU-630  
 REVISION  
 E

FORMAT SCALE ENGINEERING ID SHEET 1 OF 1  
 A NTS 000000