


# THERMAL TRANSFER LABELS



Panduit is a global leader in reliable and innovative solutions for identification and safety.

Products are engineered for a wide variety of industries and applications—including electrical, electronics, industrial, and network.

Panduit offers a complete, leading-edge line of labeling software, high-performance label materials (all RoHS compliant), and printers that provide enhanced productivity, dependability, and value to all infrastructure labeling requirements.





## Cable/Wire Labels

Turn-Tell® Labels . . . . .	4
Self-Laminating Labels . . . . .	5–7
LabelCore™ Fiber Optic Cable Identification System . . . . .	7–8
Flag Labels . . . . .	8
Non-Laminated Vinyl Cloth Labels . . . . .	9
Non-Laminated Nylon Cloth Labels . . . . .	9

## Marker Plates

High-Temperature Flame-Retardant Marker Plates . . . . .	10
Halogen-Free Flame-Retardant Marker Plates . . . . .	10
Standard Marker Plates . . . . .	11

## Heat Shrink Labels

Military Grade – Single-Sided Labels . . . . .	12
Military Grade – Two-Sided Labels . . . . .	13
Halogen-Free – Two-Sided Labels . . . . .	14

## Component Labels/Continuous Tapes

Raised Panel Labels . . . . .	15
Polyester Component Labels . . . . .	18
Super-Tack Polyester Component Labels . . . . .	19
Tedlar® Component Labels . . . . .	19
Non-Adhesive Polyester Component Labels . . . . .	19
Vinyl Cloth Component Labels . . . . .	20
Polyimide Component Labels . . . . .	20
Continuous Tapes . . . . .	21–22

## Safety and Solar Labels

Super-Tack Polyester Arc Flash Labels . . . . .	23
Raised Panel Arc Flash Labels . . . . .	23
Super-Tack Arc Flash Continuous Tapes . . . . .	24
Super-Tack Polyester Facility Identification Labels . . . . .	24
Raised Panel Solar Labels . . . . .	25

## Software/Printers/Accessories

Software . . . . .	25
TDP43ME Printers, Accessories and Ribbons . . . . .	26
TDP43HET and TDP46HET Printers, Accessories & Ribbons . . . . .	27

Tedlar is a registered trademark of E.I. du Pont de Nemours and Company.

## Turn-Tell® Labels PATENTED



- Allows labels to rotate for visibility from any angle, and allows repositioning on the wire/cable to align legends for improved aesthetics
- Ideal for use in high-density or space-constrained cable applications
- Use thermal transfer hybrid ribbons shown on pages 26 and 27
- Temperature range: -40°F to 150°F (-40°C to 66°C)



Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min Cable O.D.		Max Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.					
		in	mm	in	mm	in	mm	in	mm	in	mm								
<a href="#">R050X075V1T</a>	White	0.50	12.7	0.75	19.1	0.25	6.4	0.12	3.1	0.16	4.1	Cat. 6 28 AWG/ 18 – 14 AWG	8	5000					
<a href="#">R050X125V1T</a>				1.25	31.8	0.38	9.7	0.16	4.1	0.22	5.6	Cat. 3 UTP/12 – 10 AWG							
<a href="#">R050X150V1T</a>				1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/Cat. 5e FTP/ 10 – 6 AWG							
<a href="#">R100X075V1T</a>	White	1.00	25.4	0.75	19.1	0.25	6.4	0.12	3.1	0.16	4.1	Cat. 6 28 AWG/ 18 – 14 AWG	4	2500					
<a href="#">R100X125V1T</a>				1.25	31.8	0.38	9.7	0.16	4.1	0.22	5.6	Cat. 3 UTP/12 – 10 AWG							
<span style="background-color: #0070C0; color: white; padding: 2px;">BEST SELLER</span> <a href="#">R100X150V1T</a>				1.50	38.1	0.50	12.7	0.22	5.6	0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/							
<a href="#">R100X150V2T</a>															TIA Blue				
<a href="#">R100X150V3T</a>															TIA Green				
<a href="#">R100X150V7T</a>				TIA Red															
<a href="#">R100X150V8T</a>				TIA Yellow															
<span style="background-color: #008000; color: white; padding: 2px;">FEATURED</span> <a href="#">R100X225V1T</a>				2.25	57.2	0.75	19.1	0.28	7.1	0.39	9.9	Cat. 6 FTP/Cat. 6 UTP/ Cat. 6A FTP/8-4 AWG							
<a href="#">R100X225V2T</a>															TIA Blue				
<a href="#">R100X225V3T</a>															TIA Green				
<a href="#">R100X225V7T</a>															TIA Red				
<a href="#">R100X225V8T</a>															TIA Yellow				
<a href="#">R100X400V1T</a>				4.00	101.6	1.00	25.4	0.39	9.9	0.95	24.1	2 – 1 AWG							
<span style="background-color: #008000; color: white; padding: 2px;">FEATURED</span> <a href="#">R150X150V1T</a>				White	1.50	38.1	1.50	38.1	0.50	12.7	0.22	5.6			0.28	7.1	Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/Cat. 5e FTP/ 10 – 6 AWG	2	1000
<a href="#">R200X150V1T</a>							2.25	57.2	0.75	19.1	0.28	7.1			0.39	9.9	Cat. 6 FTP/Cat. 6A UTP/ Cat. 6A FTP/8 – 4 AWG		
<span style="background-color: #008000; color: white; padding: 2px;">FEATURED</span> <a href="#">R200X225V1T</a>	4.00	101.6	1.00				25.4	0.39	9.9	0.95	24.1	2 – 1 AWG							
<a href="#">R200X400V1T</a>	4.00	101.6	1.00				25.4	0.39	9.9	0.95	24.1	2 – 1 AWG							

Order number of labels required in multiples of Standard Package Quantity.  
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

# Vinyl Self-Laminating Labels



- Includes a colored print-on area and clear overlamine to protect the legend for clear and durable identification
- Sized specifically for wire and cable applications
- Thin and conformable; preferred material for most general wire/cable labeling
- Use thermal transfer hybrid ribbons shown on pages 26 and 27
- Temperature range: -40°F to 150°F (-40°C to 66°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15-01, File # MH14979

Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min Cable O.D.		Max Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		in	mm	in	mm	in	mm	in	mm	in	mm			
FEATURED S050X075VA1Y	White	0.50	12.7	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.1	Cat. 6 28 AWG/ 18 – 14 AWG	8	5000
FEATURED S050X075VATY*														2500
FEATURED S050X125VA1Y				1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0		Cat. 3 UTP/ 12 - 10 AWG	
FEATURED S050X125VATY*														
FEATURED S050X150VA1Y				1.50	38.1	0.50	12.7	0.16	4.1	0.32	8.1			Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG
FEATURED S050X150VATY*														
S050X250VATY*		2.50	63.5	1.00	25.4	0.32	8.1	0.48	12.1	6 – 2 AWG				
S075X075VATY*		0.75	19.1	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.1	Cat. 6 28 AWG/ 18 – 14 AWG		5
S075X100VATY*														
FEATURED S075X125VATY*				1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/ 12 - 10 AWG		
FEATURED S075X150VATY*				1.50	38.1	0.50	12.7	0.16	4.1	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG		
S100X075VA1Y		1.00	25.4	0.75	19.1	0.25	6.4	0.08	0.50	0.16	4.1	Cat. 6 28 AWG/ 18 – 14 AWG	4	2500
FEATURED S100X075VATY*														5000
FEATURED S100X125VA1Y				1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/ 12 - 10 AWG		
FEATURED S100X125VATY*														2500
BEST SELLER S100X150VA1Y				1.50	38.1	0.50	12.7	0.16	4.1	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP/ 10 - 6 AWG		
BEST SELLER S100X150VATY*													2500	
FEATURED S100X150VBTY*				TIA Blue	4	5000								
S100X150VDTY*	TIA Green													
S100X150VFTY*	TIA Orange													

Order number of labels required in multiples of Standard Package Quantity.

\*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Vinyl Self-Laminating Labels *(continued)*

Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min Cable O.D.		Max Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.							
		in	mm	in	mm	in	mm	in	mm	in	mm										
<b>S100X150VHTY*</b>	TIA Red	1.00	25.4	1.50	38.1	0.50	12.7	0.16	4.1	0.32	8.1	Cat. 5e UTP/ Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	4	5000							
<b>S100X150VITY*</b>	TIA Yellow																				
<b>S100X150V9TY*</b>	Gold																				
<b>S100X225VA1Y</b>	White			2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG		1500							
<b>S100X225VATY*</b>																					
<b>S100X225VBTY*</b>	TIA Blue																				
<b>S100X225VDTY*</b>	TIA Green																				
<b>S100X225VGTY*</b>	TIA Purple																				
<b>S100X225VHTY*</b>	TIA Red																				
<b>S100X225VITY*</b>	TIA Yellow																				
<b>S100X250VA1Y</b>	White	2.50	63.5										1.00		25.4	0.32	8.1	0.48	12.1	6 - 2 AWG	5000
<b>S100X250VATY*</b>																					
<b>S100X400VA1Y</b>		4.00	101.6										1.00		25.4	0.32	8.1	0.95	24.3	2 - 1 AWG	1000
<b>S100X400VATY*</b>																					
<b>S100X650VA1Y</b>		6.50	165.1	1.50	38.1	0.48	12.1	1.59	40.4	1/0 - 250 MCM	250										
<b>S100X650VATY*</b>																					
<b>S150X150VATY*</b>		White	1.50	38.1	1.50	38.1	0.50	12.7	0.16	4.1	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	5000							
<b>S150X225VATY*</b>																					
<b>S150X400VATY*</b>																					
<b>S200X150VATY*</b>		White	2.00	50.8	1.50	38.1	0.50	12.7	0.16	4.1	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG	2	5000						
<b>S200X225VA1Y</b>																					
<b>S200X225VATY*</b>																					
<b>S200X250VATY*</b>	2.25				57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 - 4 AWG	1000								
<b>S200X400VA1Y</b>																					
<b>S200X400VATY*</b>	4.00				101.6	1.00	25.4	0.32	8.1	0.95	24.3	2 - 1 AWG	500								
<b>S200X650VA1Y</b>																					
<b>S200X650VATY*</b>	6.50				165.1	1.50	38.1	0.48	12.1	1.59	40.4	1/0 - 250 MCM	250								
<b>S200X650VATY*</b>																					

Order number of labels required in multiples of Standard Package Quantity.

\*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

# Tedlar™ Self-Laminating Labels



- Self-extinguishing material
- Sized specifically for wire and cable applications
- Use thermal transfer hybrid ribbons shown on pages 26 and 27
- Temperature range: -65°F to 275°F (-54°C to 135°C)
- UL969 recognized File # MH14979; cUL recognized C22.2 No. 0.15.01, File # MH14979

Part Number	Print-On Area Color	Width		Length		Print-On Area Height		Min Cable O.D.		Max Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		in	mm	in	mm	in	mm	in	mm	in	mm			
<b>FEATURED</b> <a href="#">S050X150TAT-A</a>	White	0.50	12.7	1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP/10 – 6 AWG	8	5000
<a href="#">S075X125TAT-A</a>		0.75	19.1	1.25	31.8	0.38	9.7	0.12	3.1	0.28	7.0	Cat. 3 UTP/12 – 10 AWG	5	
<a href="#">S100X075TAT-A</a>		1.00	25.4	0.75	19.1	0.25	6.4	0.08	2.0	0.16	4.0	Cat. 6 28 AWG/18 – 14 AWG	4	2500
<a href="#">S100X150TAT-A</a>				1.50	38.1	0.50	12.7	0.16	4.0	0.32	8.1	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/ 10 - 6 AWG		
<a href="#">S100X225TAT-A</a>				2.25	57.2	0.75	19.1	0.24	6.1	0.48	12.1	Cat. 6 FTP/Cat. 6A UTP/ Cat. 6A FTP/8 – 4 AWG		
<a href="#">S100X400TAT-A</a>				4.00	101.6	1.00	25.4	0.32	8.1	0.95	24.1	2 – 1 AWG		2500
<a href="#">S200X400TAT-A</a>		2.00	50.8									2	500	

Tedlar® is a registered trademark of E.I. du Pont de Nemours and Company.  
Order number of labels required in multiples of Standard Package Quantity.  
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

# LabelCore™ Fiber Optic Cable Identification System



- Provides a larger labeling surface on small fiber cables and allows legends to be clearly seen
- Sleeves are made of flexible PVC material
- Locate sleeve on straight section of cable at least 2 inches from fiber boot

Part Number	Color	Part Description	Std. Pkg. Qty.
<a href="#">NWSLC-2Y</a>	Yellow	Yellow cable identification sleeve for 2mm simplex fiber cable, 1" long, use with labels: <a href="#">S100X150YAJ</a> (Laser/Inkjet); <a href="#">S100X150VAM</a> (MP300 Hand-held Printer); <a href="#">S100X150VA1Y</a> or S100X150VATY (Thermal Transfer Printer).	100
<a href="#">NWSLC-2Y-AQ</a>	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 1" long, use with labels: <a href="#">S100X150YAJ</a> (Laser/Inkjet); <a href="#">S100X150VAM</a> (MP300 Hand-held Printer); <a href="#">S100X150VA1Y</a> or S100X150VATY (Thermal Transfer Printer).	
<b>FEATURED</b> <a href="#">NWSLC-3Y</a>	Orange	Orange cable identification sleeve for 3mm simplex cable, 1" long, use with labels: <a href="#">S100X150YAJ</a> (Laser/Inkjet); <a href="#">S100X150VAM</a> (MP300 Hand-held Printer); <a href="#">S100X150VA1Y</a> or S100X150VATY (Thermal Transfer Printer).	
<b>FEATURED</b> <a href="#">NWSLC-7Y</a>	White	White cable identification sleeve for 3mm duplex fiber cable, 1" long, use with labels: <a href="#">S100X225YAJ</a> (Laser/Inkjet); <a href="#">S100X225VAM</a> (MP300 Hand-held Printer); <a href="#">S100X225VATY</a> or <a href="#">S200X225VATY</a> (Thermal Transfer Printer).	


Order number of labels required in multiples of Standard Package Quantity.

## LabelCore™ Fiber Optic Cable Identification System *(continued)*

Part Number	Color	Part Description	Std .Pkg. Qty.
<a href="#">NWSLC2-2Y</a>	Yellow	Yellow cable identification sleeve for 2mm simplex cable, 2 inches long, use with labels: <a href="#">S200X150YAJ</a> (Laser/Inkjet) or <a href="#">S200X150VATY</a> (Thermal Transfer Printer).	100
<a href="#">NWSLC2-2Y-AQ</a>	Aqua	Aqua cable identification sleeve for 2mm simplex cable, 2 inches long, use with labels: <a href="#">S200X150YAJ</a> (Laser/Inkjet) or <a href="#">S200X150VATY</a> (Thermal Transfer Printer).	
<a href="#">NWSLC2-3Y</a>	Orange	Orange cable identification sleeve for 3mm simplex cable, 2 inches long, use with labels: <a href="#">S200X150YAJ</a> (Laser/Inkjet) or <a href="#">S200X150VATY</a> (Thermal Transfer Printer).	
<a href="#">NWSLC2-7Y</a>	White	White cable identification sleeve for 3mm duplex fiber cable, 2 inches long, use with labels: <a href="#">S200X225YAJ</a> (Laser/Inkjet) <a href="#">S200X225VATY</a> (Thermal Transfer Printer).	

Order number of labels required in multiples of Standard Package Quantity.

## Flag Labels



- Halogen-free, white polyester flag-style marker for wire/cable labeling
- Improved legibility and more information on small wires and cables provide clearer, more complete identification
- Innovative design allows the product to be applied as a permanent adhesive label or as a repositionable non-adhesive label
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized C22.2 No. 0.15-01, File # MH14979


Part Number	Width		Height		Print-On Area				Min Cable O.D.		Max Cable O.D.		Wire Range	Std. Pkg. Qty. Roll
	in	mm	in	mm	Width	Height	in	mm	in	mm				
<a href="#">F100X150AJT</a>	1.00	25.4	1.50	38.1	0.88	22.4	0.75	19.1	0.12	3.1	0.20	5.1	12 – 10 AWG	2500
<a href="#">F100X213AJT</a>			2.13	54.1					0.32	8.1	0.38	9.7	3 – 2 AWG	
<a href="#">F100X300AJT</a>			3.00	76.2			2.00	50.8	0.09	2.3	0.28	7.1	18 – 6 AWG	
<a href="#">F100X363AJT</a>			3.63	92.2					0.20	5.1	0.46	11.7	8 – 1 AWG	

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.



## Non-Laminated Vinyl Cloth Labels



- Thin and conformable material with repositionable adhesive allows label to be removed and reused in temporary applications

- Temperature range: -40° F to 170° F (-40° C to 77° C)
- UL969 recognized, File # MH14576 and MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14576

- Works well on Teflon® coated wires\*
- Use thermal transfer hybrid ribbons shown on pages 26 and 27


Part Number	Print-On Area Color	Width		Length		Min Cable O.D.		Max Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		in	mm	in	mm	in	mm	in	mm			
<a href="#">N025X075CBT</a>	White	0.25	6.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	7	10000
<a href="#">N025X150CBT</a>				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		2500
<a href="#">N025X175CBT</a>				1.75	44.5	0.28	7.1	0.48	12.2	6 – 1 AWG		
<b>FEATURED</b> <a href="#">N050X075CBT</a>		0.50	12.7	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG		10000
<a href="#">N050X100CBT</a>				1.00	25.4	0.16	4.1	0.24	6.1	10 – 8 AWG		
<a href="#">N050X125CBT</a>				1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG		
<a href="#">N050X150CBT</a>				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG	2500	
<b>FEATURED</b> <a href="#">N100X075CBT</a>		1.00	25.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	3	10000
<a href="#">N100X125CBT</a>				1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG		5000
<a href="#">N100X150CBT</a>				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		
<a href="#">N100X175CBT</a>				1.75	44.5	0.28	7.1	0.48	12.2	6 – 1 AWG		2500

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

\*Teflon® is a registered trademark of E. I du Pont de Nemours and Company

## Non-Laminated Nylon Cloth Labels



- Offer crisp, clear legends with superior legibility
- Used in flat applications and in a wrap format for wire/cable marking

- Use thermal transfer resin ribbons shown on pages 26 and 27

- Temperature range: -65°F to 275°F (-54°C to 135°C)

Part Number	Color	Width		Length		Min Cable O.D.		Max Cable O.D.		Wire Range	Labels Per Row	Std. Pkg. Qty.
		in	mm	in	mm	in	mm	in	mm			
<a href="#">N050X075C1T</a>	White	0.50	12.7	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	5	10000
<a href="#">N050X125C1T</a>				1.25	31.8	0.20	5.1	0.32	8.1	10 – 6 AWG		
<a href="#">N100X075C1T</a>		1.00	25.4	0.75	19.1	0.12	3.1	0.16	4.1	12 – 10 AWG	3	
<a href="#">N100X150C1T</a>				1.50	38.1	0.24	6.1	0.40	10.2	8 – 2 AWG		

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME Printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## High-Temperature Flame-Retardant Marker Plates



- Used for identification markers in (Class 1E) harsh environments
- Compatible with Intermediate Cross Section cable ties
- Use thermal transfer RMER4BL-A or RHER4BL-A resin ribbons shown on pages 26 and 27
- Temperature range: -67°F to 275°F (-55°C to 135°C)

Part Number	Color	Width		Height		Print-On Area Width		Labels Per Roll	Std. Pkg. Qty. (Roll)
		in	mm	in	mm	in	mm		
<a href="#">M200X042FQT</a>	White	2.00	50.8	0.42	10.7	1.22	31.0	500	1
<a href="#">M200X042FQT-B</a>								2000	
<a href="#">M200X080FQT</a>				0.80	20.3			250	
<a href="#">M200X080FQT-B</a>								1000	

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Halogen-Free Flame-Retardant Marker Plates



- Used to identify wires, cables, equipment, and many other applications
- Offer crisp, clear legend with superior legibility and engineered to withstand high temperatures, harsh solvents, oils, and chemicals without over-lamination
- Compatible with Intermediate Cross Section cable ties
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature range: -40°F to 193°F (-40°C to 90°C)

Part Number	Color	Width		Height		Print-On Area Width		Labels Per Roll	Std. Pkg. Qty. (Roll)
		in	mm	in	mm	in	mm		
<a href="#">M200X042UPT</a>	White	2.00	50.8	0.42	10.7	1.30	33.0	500	1
<a href="#">M200X042UPT-B</a>								2000	
<a href="#">M200X080UPT</a>				0.80	20.3			500	
<a href="#">M200X080UPT-B</a>								2000	

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

# Standard Marker Plates



- Non-adhesive and halogen free; used to identify wires, cables, equipment, and many other applications
- Attachable in horizontal or vertical orientation. The 0.5" Plenum rated and 0.33" non-Plenum rated Hook & Loop Cable Ties can be used in hanging position
- Meets the outgassing requirements of ASTM E-595 suitable for use in air handling spaces
- Available in a variety of colors and sizes
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature range: -58°F to 221°F (-50°C to 105°C)

Part Number	Color	Width		Height		Print-On Area Width		Cable Type	Labels Per Roll	Std. Pkg. Qty. (Roll)
		in	mm	in	mm	in	mm			
<a href="#">M200X050Y6T</a>	TIA Yellow	2.00	50.8	0.50	12.7	1.07	27.3	Intermediate Cross Section Cable Ties	500	1
<a href="#">M200X050Y7T</a>	White									
<a href="#">M200X050ACT</a>	TIA Blue									
<a href="#">M200X050AIT</a>	TIA Red									
<a href="#">M200X100Y6T</a>	TIA Yellow	1.00	25.4	0.80	20.3	Standard Cross Section Cable Ties	2000			
<a href="#">M200X100Y7T</a>	White									
<a href="#">M200X100Y7T-B</a>										
<a href="#">M200X100ACT</a>	TIA Blue									
<a href="#">M200X100AIT</a>	TIA Red	3.00	76.2	0.50	12.7	2.07	52.6	Intermediate Cross Section Cable Ties	500	
<a href="#">M300X050Y6T</a>	TIA Yellow									
<a href="#">M300X050Y7T</a>	White									
<a href="#">M300X050ACT</a>	TIA Blue									
<a href="#">M300X050AIT</a>	TIA Red	1.00	25.4	1.80	45.7	Standard Cross Section Cable Ties				
<a href="#">M300X100Y6T</a>	TIA Yellow									
<a href="#">M300X100Y7T</a>	White									
<a href="#">M300X100ACT</a>	TIA Blue									
<a href="#">M300X100AGT</a>	TIA Orange									
<a href="#">M300X100AIT</a>	TIA Red									

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Military Grade Single-Sided Heat Shrink Labels



- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Meet UL Standard 224 with a VW-1 rating for flammability and AMS-DTL-23053/5C (Class 1 and Class 3)
- Meet SAE-AS81531, MIL-STD-883F Method 2015.13, Solutions A, B, and D, and MIL-STD-202G Method 215K, Solutions A, C, and D when printed with resin and hybrid thermal transfer ribbons
- Shrink ratio 3:1
- Tested for use as an identification marker in (Class 1E) harsh environments
- Use thermal transfer hybrid ribbon or white resin ribbons shown on pages 26 and 27
- Temperature range: -67°F to 275°F (-55°C to 135°C)
- UL224 recognized, File # E205133; CSA certified, C22.2 No. 198.1.06, File # 256205

	Part Number	Part Number	Part Number	Part Number	Diameter		Width		Height		Min Cable O.D.		Max Cable O.D.		Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
					in	mm	in	mm	in	mm	in	mm	in	mm				
FEATURED	H050X025H1T*	H050X025H2T	—	—	0.13	3.1	0.50	12.7	0.25	6.4	0.04	1.0	0.13	3.3	22 – 18 AWG	4	2000	1
FEATURED	H075X025H1T*	—	—	0.75			19.1	2								1000		
BEST SELLER	H100X025H1T*	H100X025H2T	—	—			1.00	25.4								1	500	
	H150X025H1T*	H150X025H2T	—	—			1.50	38.1										
FEATURED	H200X025H1T*	H200X025H2T	H200X025H3T	H200X025H4T	2.00	50.8												
FEATURED	H050X034H1T*	H050X034H2T	—	—	0.19	4.7	0.50	12.7	0.34	8.6	0.06	1.5	0.19	4.8	18 – 12 AWG	4	2000	
	H075X034H1T*	—	—	0.75			19.1	2								1000		
BEST SELLER	H100X034H1T*	H100X034H2T	—	—			1.00	25.4								1	500	
FEATURED	H150X034H1T*	H150X034H2T	—	—			1.50	38.1										
BEST SELLER	H200X034H1T*	H200X034H2T	H200X034H3T	H200X034H4T	2.00	50.8												
FEATURED	H050X044H1T*	H050X044H2T	—	—	0.25	6.3	0.50	12.7	0.44	11.2	0.08	2.0	0.25	6.4	16 – 10 AWG	4	2000	
FEATURED	H075X044H1T*	—	—	0.75			19.1	2								1000		
BEST SELLER	H100X044H1T*	H100X044H2T	—	—			1.00	25.4								1	500	
FEATURED	H150X044H1T*	H150X044H2T	—	—			1.50	38.1										
BEST SELLER	H200X044H1T*	H200X044H2T	H200X044H3T	H200X044H4T	2.00	50.8												
FEATURED	H050X064H1T*	H050X064H2T	—	—	0.38	9.7	0.50	12.7	0.64	16.3	0.13	3.3	0.38	9.7	12 – 6 AWG	4	2000	
FEATURED	H100X064H1T*	H100X064H2T	—	—			1.00	25.4								2	1000	
BEST SELLER	H200X064H1T*	H200X064H2T	H200X064H3T	H200X064H4T			2.00	50.8								1	500	
	H050X084H1T	—	—	—			0.50	12.7										
FEATURED	H100X084H1T	H100X084H2T	—	—	0.50	12.7	1.00	25.4	0.84	21.3	0.17	4.3	0.50	12.7	8 – 1 AWG	4	2000	
FEATURED	H200X084H1T	H200X084H2T	H200X084H3T	H200X084H4T			2.00	50.8								2	1000	
	H050X165H1T	—	—	—	1.00	25.4	0.50	12.7	1.65	41.9	0.33	8.4	1.00	25.4	4 AWG – 500 MCM	4	1000	
FEATURED	H100X165H1T	H100X165H2T	—	—			1.00	25.4								2	500	
FEATURED	H200X165H1T	H200X165H2T	H200X165H3T	H200X165H4T			2.00	50.8								1	250	
FEATURED	H200X240H1T	H200X240H2T	—	—	1.50	38.1	2.00	50.8	2.40	61.0	0.50	12.7	1.50	38.1	1 AWG – 1000 MCM	1	100	

Order number of labels required in multiples of Standard Package Quantity.  
 \*Available in Bulk packages (5 times Labels Per Roll), add -B to end of part number.  
 ^ For different ribbon colors, see pages 26 and 27.

# Military Grade Two-Sided Heat Shrink Labels PATENTED



- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Can be printed on both sides for improved visibility
- Meet the material requirements and physical properties of AMS-DTL-23053/5C (Class 1 and Class 3) and UL standard 224 with a VW-1 rating
- Meet SAE-AS81531, MIL-STD-883F Method 2015.13, Solutions A, B and D, and MIL-STD-202G Method 215K, Solutions A,C and D when printed using resin or hybrid thermal transfer ribbons
- Shrink ratio 3:1
- Tested as an identification marker for use in (Class 1E) harsh environments
- Use thermal transfer hybrid ribbons shown on pages 26 and 27
- Temperature range: -67°F to 275°F (-55°C to 135°C)
- UL224 recognized, File # E205133; CSA certified, C22.2 No. 198.1-06, File # 256205

Part Number	Part Number	Diameter		Width		Height		Min Cable O.D.		Max Cable O.D.		Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
		in	mm	in	mm	in	mm	in	mm	in	mm				
<a href="#">H100X025H1T-2</a>	<a href="#">H100X025H2T-2</a>	0.13	3.1	1.00	25.4	0.25	6.4	0.04	1.0	0.13	3.3	22 – 18 AWG	2	1000	1
<a href="#">H100X025H1T-2-B</a>	—			5000											
<a href="#">H200X025H1T-2</a>	<a href="#">H200X025H2T-2</a>			2.00	50.8								1	500	
<a href="#">H200X025H1T-2-B</a>	—			2500											
<a href="#">H100X034H1T-2</a>	<a href="#">H100X034H2T-2</a>	0.19	4.7	1.00	25.4	0.34	8.6	0.06	1.5	0.19	4.8	18 – 12 AWG	2	1000	
<a href="#">H100X034H1T-2-B</a>	—			5000											
<a href="#">H200X034H1T-2</a>	<a href="#">H200X034H2T-2</a>			2.00	50.8								1	500	
<a href="#">H200X034H1T-2-B</a>	—			2500											
<a href="#">H100X044H1T-2</a>	<a href="#">H100X044H2T-2</a>	0.25	6.3	1.00	25.4	0.44	11.2	0.08	2.0	0.25	6.4	16 – 10 AWG	2	1000	
<a href="#">H100X044H1T-2-B</a>	—			5000											
<a href="#">H200X044H1T-2</a>	<a href="#">H200X044H2T-2</a>			2.00	50.8								1	500	
<a href="#">H200X044H1T-2-B</a>	—			2500											
<a href="#">H100X064H1T-2</a>	<a href="#">H100X064H2T-2</a>	0.38	9.7	1.00	25.4	0.64	16.3	0.13	3.3	0.38	9.7	12 – 6 AWG	2	1000	
<a href="#">H100X064H1T-2-B</a>	—			5000											
<a href="#">H200X064H1T-2</a>	<a href="#">H200X064H2T-2</a>			2.00	50.8								1	500	
<a href="#">H200X064H1T-2-B</a>	—			2500											
<a href="#">H100X084H1T-2</a>	<a href="#">H100X084H2T-2</a>	0.50	12.7	1.00	25.4	0.84	21.3	0.17	4.3	0.50	12.7	8 – 1 AWG	2	1000	
<a href="#">H100X084H1T-2-B</a>	—			5000											
<a href="#">H200X084H1T-2</a>	<a href="#">H200X084H2T-2</a>			2.00	50.8								1	500	
<a href="#">H200X084H1T-2-B</a>	—			2500											
<a href="#">H100X122H1T-2</a>	<a href="#">H100X122H2T-2</a>	0.75	19.0	1.00	25.4	1.22	31.0	0.25	6.3	0.75	19.0	8 – 4/0 AWG	2	500	
<a href="#">H200X122H1T-2</a>	<a href="#">H200X122H2T-2</a>			2.00	50.8								1	250	
<a href="#">H100X165H1T-2</a>	<a href="#">H100X165H2T-2</a>	1.00	25.4	1.00	25.4	1.65	41.9	0.33	8.4	1.00	25.4	4 AWG – 500 MCM	2	500	
<a href="#">H200X165H1T-2</a>	<a href="#">H200X165H2T-2</a>			2.00	25.4								1	250	

Order number of labels required in multiples of Standard Package Quantity.

## Halogen-Free Two-Sided Heat Shrink Labels PATENTED



- Permanent, one-piece, heat shrink sleeve designed to provide clear, durable identification of wires and cables
- Can be printed on both sides for improved visibility
- Meet SAE-AS5942, MIL-STD-883F Method 2015.13, Solutions A, B, and D, and MIL-STD-202G Method 215K, Solutions A, C, and D when printed with resin and hybrid thermal transfer ribbons
- Meet BS6853; 1999 Vehicle Category 1A for burning behavior and toxic gas emissions; Smoke Density Class II
- Shrink ratio 2:1
- Use thermal transfer hybrid ribbons shown on pages 26 and 27
- Temperature range: -22°F to 221°F (-30°C to 105°C)

Part Number	Part Number	Diameter		Width		Height		Min Cable O.D.		Max Cable O.D.		Wire Range	Labels Per Row	Labels Per Roll	Std. Pkg. Qty. (Roll)
		in	mm	in	mm	in	mm	in	mm	in	mm				
H200X025HFT-2	H100X025HGT-2	0.13	3.1	1.00	25.4	0.25	6.4	0.06	1.5	0.13	3.3	22 – 18 AWG	2	1000	1
				2.00	50.8								1	500	
FEATURED H200X034HFT-2	H100X034HGT-2	0.19	4.7	1.00	25.4	0.34	8.6	0.09	2.3	0.19	4.8	18 – 12 AWG	2	1000	
				2.00	50.8								1	500	
FEATURED H200X044HFT-2	H100X044HGT-2	0.25	6.4	1.00	25.4	0.44	11.1	0.13	3.3	0.25	6.4	16 – 10 AWG	2	1000	
				2.00	50.8								1	500	
H200X064HFT-2	H100X064HGT-2	0.38	9.7	1.00	25.4	0.64	16.2	0.19	4.8	0.38	9.7	12 – 6 AWG	2	1000	
				2.00	50.8								1	500	
H200X084HFT-2	H100X084HGT-2	0.50	12.7	1.00	25.4	0.84	21.3	0.25	6.4	0.50	12.7	8 – 1 AWG	2	1000	
				2.00	50.8								1	500	
H200X165HFT-2	H100X165HGT-2	1.00	25.4	1.00	25.4	1.65	41.9	0.50	12.7	1.00	25.4	8 AWG – 500 MCM	2	1000	
				2.00	50.8								1	250	

Order number of labels required in multiples of Standard Package Quantity.

# Raised Panel Push Button Labels




- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposure)
- Meets DIN 40050-9, IP69K for washdown applications
- Meet ASTM D3389 standard for abrasion resistance and also meet solar application standards
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

Part Number	Color	Width		Height		Print-On Area Height		Hole Diameter		Labels Per Row	Std. Pkg. Qty.
		in	mm	in	mm	in	mm	in	mm		
<a href="#">C120X150APT-22</a>	White	1.20	30.5	1.50	38.1	0.45	11.4	0.87	22.0	3	500
<a href="#">C120X150A8T-22</a>	Yellow										
<a href="#">C120X150AST-22</a>	Green										
<a href="#">C120X150AWT-22</a>	Red										
<a href="#">C120X150A0T-22</a>	Black										
<a href="#">C120X190APT-22</a>	White	1.90	48.3	1.90	48.3	0.85	21.6	1.18	30.0	2	
<a href="#">C120X190A8T-22</a>	Yellow										
<a href="#">C120X190AST-22</a>	Green										
<a href="#">C120X190AWT-22</a>	Red										
<a href="#">C120X190A0T-22</a>	Black										
<a href="#">C180X180APT-30</a>	White	2.40	61.0	2.40	61.0	0.90	22.9	1.18	30.0	1	
<a href="#">C180X180A8T-30</a>	Yellow										
<a href="#">C180X180AST-30</a>	Green										
<a href="#">C180X180AWT-30</a>	Red										
<a href="#">C180X180A0T-30</a>	Black										
<a href="#">C240X240APT-30</a>	White	2.40	61.0	2.40	61.0	0.90	22.9	1.18	30.0	1	
<a href="#">C240X240A8T-30</a>	Yellow										
<a href="#">C240X240AST-30</a>	Green										
<a href="#">C240X240AWT-30</a>	Red										
<a href="#">C240X240A0T-30</a>	Black										

Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Raised Panel Half Push Button Labels

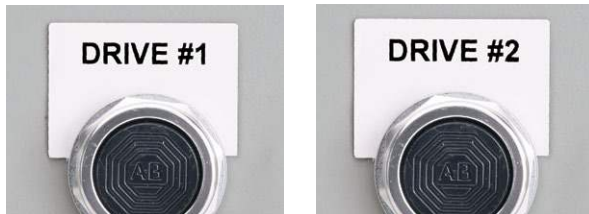


- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

Part Number	Color	Width		Height		Print-On Area Height		Hole Diameter		Labels Per Row	Std. Pkg. Qty.
		in	mm	in	mm	in	mm	in	mm		
<a href="#">C180X130APT-30H</a>	White	1.80	45.7	1.30	33.0	0.73	18.5	1.18	30.0	1	500
<a href="#">C240X200APT-30H</a>		2.40	61.0	2.00	50.8	1.43	36.3				

Order number of labels required in multiples of Standard Package Quantity.  
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Raised Panel Pre-Printed Emergency Stop Labels

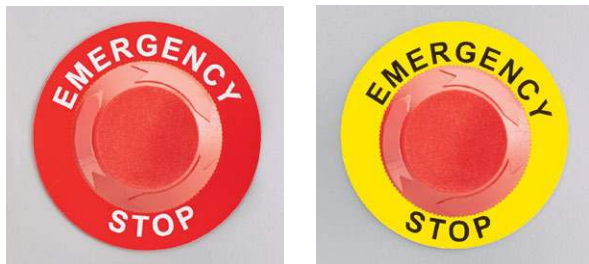

- Deliver the look of engraved plates
- Strong holding power for rough, textured, and powder-coated surfaces
- Meets DIN 40050-9, IP69K for washdown applications
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14576; cUL recognized C22.2 No. 0.15.01, File # MH14576

Part Number	Color	Diameter		Hole Diameter		Std. Pkg. Qty.
		in	mm	in	mm	
<a href="#">C235A8-30-ES</a>	Black on Yellow	2.35	60.0	1.18	30.0	25
<a href="#">C350A8-30-ES</a>		3.50	89.0			

Order number of labels required in multiples of Standard Package Quantity.



# Raised Panel Component Labels



- Deliver the look of engraved laminated plates with the convenience of printing on demand
- Strong holding power for rough, textured, and powder-coated surfaces
- Provide crisp, clear, and durable legends for your reliable, high-performance identification needs
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposure)
- Meets DIN 40050-9, IP69K for washdown applications
- Meet ASTM D3389 standard for abrasion resistance, and also meet solar application standards
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.	
		in	mm	in	mm			
<b>FEATURED</b> C100X050APT	White	1.00	25.4	0.50	12.7	3	500	
C100X050A8T	Yellow							
C100X050AST	Green							
C100X050AWT	Red							
C100X050A0T	Black							
C100X050AMT	Silver							
C125X030APT	White	1.25	31.8	0.30	7.6			
C170X090APT		1.70	43.2	0.90	22.9			
C200X100APT	White	2.00	50.8	1.00	25.4			
C200X100A8T								Yellow
C200X100AST								Green
C200X100AWT								Red
C200X100A0T								Black
C200X100AMT								Silver
C252X030APT	White	2.52	64.0	0.30	7.6	1		
<b>FEATURED</b> C300X100APT	White	3.00	76.2	1.00	25.4			
C300X100A8T				Yellow				
C300X100AWT				Red				
C300X250APT	White	3.00	76.2	2.50	63.5			
C300X250A8T	Yellow							
C300X250AWT	Red							
C300X250A0T	Black							
C300X250AMT	Silver							
C350X300APT	White	3.50	88.9	3.00	76.2			
C350X300A8T	Yellow							
C350X300A0T	Black							
C379X030APT	White	3.79	96.3	0.30	7.6			
C379X030AQT	Blue							
C379X030AWT	Red							
<b>FEATURED</b> C400X100APT	White	4.00	101.6	1.00	25.4			
C400X100A8T	Yellow							
C400X100AST	Green							
C400X100AWT	Red							
C400X100A0T	Black							
C400X100AMT	Silver							

Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Polyester Component Labels



- Provide durability; high-temperature resistance and dimensional stability; does not easily stretch or tear
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.		
		in	mm	in	mm				
<a href="#">C025X025YJT</a>	White	0.25	6.4	0.25	6.4	12	10000		
<a href="#">C038X038YJT</a>		0.38	9.7	0.38	9.7	7			
<a href="#">C050X044YJT</a>		0.50	12.7	0.44	11.2	5			
<a href="#">C060X020YJT</a>		0.60	15.2	0.20	5.1	3			
<a href="#">C075X025YJT</a>		0.75	19.1	0.25	6.4				
<a href="#">C080X020YJT</a>		0.80	20.3	0.20	5.1				
<a href="#">C090X025YJT</a>		0.90	22.9	0.25	6.4				
<a href="#">C100X025YJT</a>		1.00	25.4						
<a href="#">C100X038YJT</a>				0.38	9.7				
<a href="#">C100X050YJT</a>		0.50	12.7						
<a href="#">C100X050YMT</a>	Silver								
<a href="#">C125X038YJT</a>	White	1.25	31.8	0.38	9.7	5000			
<a href="#">C150X050YJT</a>		1.50	38.1	0.50	12.7				
<a href="#">C150X075YJT</a>		0.75	19.1	0.25	6.4				
<a href="#">C200X025YJT</a>		2.00	50.8						
<a href="#">C200X038YJT</a>				0.38	9.7				
<a href="#">C200X050YJT</a>				0.50	12.7				
<a href="#">C200X100YJT</a>				1.00	25.4				
<a href="#">C200X100YMT</a>		Silver							
<a href="#">C275X125YJT</a>		White	2.75	69.9	1.25		31.8	2500	
<a href="#">C275X125YMT</a>		Silver							
<a href="#">C300X038YJT</a>	White			0.38	9.7	1	500		
<a href="#">C300X100YJT</a>				1.00	25.4			2500	
<a href="#">C300X100YMT</a>				Silver					
<a href="#">C300X200YJT</a>				White	2.00			50.8	1000
<a href="#">C300X200YMT</a>				Silver					
<a href="#">C350X100YJT</a>				White	3.50			88.9	1.00
<a href="#">C400X100YJT</a>	2.00	50.8	1000						
<a href="#">C400X200YJT</a>					4.00	101.6			
<a href="#">C400X200YMT</a>	Silver								
<a href="#">C400X300YJT</a>	White	4.00	101.6	3.00	76.2	2500			
<a href="#">C400X400YJT</a>				4.00	101.6		1000		
<a href="#">C400X600YJT</a>				6.00	152.4				

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Super-Tack Polyester Component Labels



- Provide durability; high-temperature resistance and dimensional stability; does not stretch or easily tear; and has high-tack permanent adhesive
- Used to identify patch panels, faceplates, punchdown blocks, and other network systems hardware
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbons on pages 26 and 27
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

Part Number	Color	Width		Height		Type of Application	Labels Per Row	Std. Pkg. Qty.
		in	mm	in	mm			
<a href="#">C061X030YPT</a>	White	0.61	15.5	0.30	7.6	1-port	4	2500
<a href="#">C100X050YPT</a>		1.00	25.4	0.50	12.7	general identifier	3	10000
<a href="#">C125X030YPT</a>		1.25	31.8	0.30	7.6	2-port		
<a href="#">C188X030YPT</a>		1.88	47.8	0.30	7.6	3-port	2500	
<a href="#">C200X100YPT</a>		2.00	50.8	1.00	25.4	general identifier		
<a href="#">C252X030YPT</a>		2.52	64.0	0.30	7.6	4-port		
<a href="#">C252X030YPT-P*</a>		2.61	66.3			1, 2, 3, or 4-port		
<a href="#">C261X030YPT</a>		2.61	66.3	4-port				
<a href="#">C379X030YPT</a>		3.79	96.3	6-port				
<a href="#">C379X030YPT-P*</a>		3.79	96.3	3.00	76.2	1, 2, 3, 4, 5 or 6-port		
<a href="#">C400X300YPT</a>						4.0	101.6	3.00

\*Label is perforated to be used in 1, 2, 3, 4, or 6-Port position applications.  
 Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Tedlar® Component Labels



- Self-extinguishing and ideal for labeling high-temperature areas
- Meet Federal Motor Vehicle Safety Standard (FMVSS-302) for flammability
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature range: -40°F to 225°F (-40°C to 106°C); tests at 275°F have shown acceptable results

Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		in	mm	in	mm		
<a href="#">C090X025TJT</a>	White	0.90	22.9	0.25	6.4	3	10000
<a href="#">C200X038TJT</a>		2.00	50.8	0.38	9.7	1	5000
<a href="#">C200X100TJT</a>		2.00	50.8	1.00	25.4		2500
<a href="#">C300X038TJT</a>		3.00	76.2	0.38	9.7		5000

Tedlar® is a registered trademark of E.I. du Pont de Nemours and Company.  
 Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Non-Adhesive Polyester Component Labels



- Used to identify patch panels, faceplates, punchdown blocks, and other network systems hardware
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature range: -10°F to 302°F (-23°C to 150°C)

Part Number	Color	Width		Height		Application	Labels Per Row	Std. Pkg. Qty.
		in	mm	in	mm			
<a href="#">C195X040Y1T</a>	White	1.95	49.5	0.40	10.2	Single-gang faceplate	2	1000
<a href="#">C261X035Y1T</a>		2.61	66.3	0.35	8.9	4-port identifier		

Order number of labels required in multiples of Standard Package Quantity.  
 Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Vinyl Cloth Component Labels



- Ideal for temporary marking of chips, boards, and ICs
- Removable without leaving any residue
- Pliable material is suitable for rough texture surfaces
- Use thermal transfer hybrid ribbons shown on pages 26 and 27
- Temperature range: 50°F to 170°F (10°C to 77°C)
- UL969 recognized, File # MH14576 and File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14576

Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		in	mm	in	mm		
<a href="#">C050X044CBT</a>	White	0.50	12.7	0.44	11.2	5	10000
<a href="#">C060X020CBT</a>		0.60	15.2	0.20	5.1	3	
<a href="#">C075X025CBT</a>		0.75	19.1	0.25	6.4		
<a href="#">C100X038CBT</a>		1.00	25.4	0.38	9.7		
<a href="#">C100X050CBT</a>				0.50	12.7		
<a href="#">C150X075CBT</a>		1.50	38.1	0.75	19.1	1	5000
<a href="#">C160X020CBT</a>		1.60	40.6	0.20	5.1		10000
<a href="#">C200X050CBT</a>		2.00	50.8	0.50	12.7		5000

Order number of labels required in multiples of Standard Package Quantity.  
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Polyimide Component Labels



- Ideal for electronic components and internal circuitry applications
- Intended for applications requiring solvent and high-temperature resistance performance, such as the wave solder process
- Use thermal transfer RMER4BL-C or RHER4BL-C resin ribbons on white polyimide shown on pages 26 and 27
- Use thermal transfer hybrid ribbons on tan polyimide labels shown on pages 26 and 27
- Temperature range: -40°F to 350°F (-40°C to 177°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		in	mm	in	mm		
<a href="#">C025X025KBT</a>	White	0.25	6.4	0.25	6.4	12	10000
<a href="#">C050X020KBT</a>		0.50	12.7	0.20	5.1	5	
<a href="#">C050X044KBT</a>				0.44	11.2		
<a href="#">C060X020KBT</a>		0.60	15.3	0.20	5.1	3	
<a href="#">C100X019KBT</a>		1.00	25.4	0.19	4.8		
<a href="#">C100X025KBT</a>				0.25	6.4		
<a href="#">C100X038KBT</a>				0.38	9.7		
<a href="#">C150X025KBT</a>		1.50	38.1	0.25	6.4	2	5000
<a href="#">C160X020KBT</a>		1.60	40.6	0.20	5.1		
<a href="#">C200X025KBT</a>		2.00	50.8	0.25	6.4	1	
<a href="#">C200X038KBT</a>				0.38	9.7		

Order number of labels required in multiples of Standard Package Quantity.  
Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Reflective Continuous Tapes



- Used for illuminating or highlighting a range of objects
- Offer crisp, clear legends with superior legibility
- Conformable material for flat applications and safety and facility identification
- Can be over-laminated to increase durability (see page 26)
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature range: -40°F to 180°F (-40°C to 82°C)
- UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

Part Number	Color	Width		Length		Std. Pkg. Qty. (Roll)
		in	mm	ft	m	
<a href="#">T100X000RUT</a>	Orange	1.00	25.4	50.0	15.2	1
<a href="#">T400X000RPT</a>	White	4.00	101.6			
<a href="#">T400X000RQT</a>	Blue					
<a href="#">T400X000RUT</a>	Orange					
<a href="#">T400X000RXT</a>	Yellow					

Order number of labels required in multiples of Standard Package Quantity.

Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Super-Tack Polyester Continuous Tapes



- Thermal transfer printable continuous tape format
- Super-tack polyester has ultra-aggressive adhesive
- Ideal for rough, textured, and coated surfaces
- Applications include rack unit labeling, cabinets, cable tray, pathways, control panels, enclosures, pipes, and much more
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH14979

Part Number	Color	Material	Width		Length		Std. Pkg. Qty. (Roll)
			in	mm	ft	m	
<a href="#">T038X000YP1</a>	White	Polyester	0.38	9.7	100.0	30.5	1
<a href="#">T050X000YP1</a>			0.50	12.7			
<a href="#">T100X000Y81</a>	Yellow		1.00	25.4			
<a href="#">T100X000YP1</a>	White						
<a href="#">T100X000YW1</a>	Red						
<a href="#">T200X000Y01</a>	Black		2.00	50.8			
<a href="#">T200X000Y81</a>	Yellow						
<a href="#">T200X000YP1</a>	White						
<a href="#">T200X000YQ1</a>	Blue						
<a href="#">T200X000YS1</a>	Green						
<a href="#">T200X000YU1</a>	Orange						
<a href="#">T200X000YW1</a>	Red		4.00	101.6			
<a href="#">T400X000Y01</a>	Black						
<a href="#">T400X000Y81</a>	Yellow						
<a href="#">T400X000YP1</a>	White						
<a href="#">T400X000YQ1</a>	Blue						
<a href="#">T400X000YS1</a>	Green						
<a href="#">T400X000YU1</a>	Orange						
<a href="#">T400X000YW1</a>	Red						

Order number of labels required in multiples of Standard Package Quantity.

## Continuous Tapes



- Offer crisp, clear legends with superior legibility
- Conformable material for flat applications and safety and facility identification
- Can be over-laminated to increase durability (see below)
- Use thermal transfer resin ribbons shown on pages 26 and 27
- For white, black, clear, blue, and yellow vinyl continuous tapes only: UL969 recognized, File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

Part Number	Color	Material	Temperature Range	Width		Length		Std. Pkg. Qty. (Roll)
				in	mm	ft	m	
<a href="#">T024X000FJT*</a>	White	Polyolefin	-40°F to 180°F (-40°C to 82°C)	0.24	6.1			
<a href="#">T031X000FJT*</a>				0.31	7.9			
<a href="#">T038X000FJT*</a>				0.38	9.7			
<a href="#">T050X000FJT*</a>				0.50	12.7			
<a href="#">T100X000VP1Y</a>		Vinyl	-58°F to 176°F (-50°C to 80°C)	1.00	25.4			
<a href="#">T100X000VQ1Y</a>	Blue							
<a href="#">T100X000VS1Y</a>	Green							
<a href="#">T100X000VU1Y</a>	Orange							
<a href="#">T100X000VW1Y</a>	Red							
<a href="#">T100X000VX1Y</a>	Yellow							
<a href="#">T100X000VY1Y</a>	Black							
<a href="#">T100X000YK1</a>	Clear	Polyester	-40°F to 302°F (-40°C to 150°C)					
<b>FEATURED</b> <a href="#">T200X000VP1Y</a>	White	Vinyl	-58°F to 176°F (-50°C to 80°C)	2.00	50.8	100.0	30.5	1
<a href="#">T200X000VQ1Y</a>	Blue							
<a href="#">T200X000VR1Y</a>	Brown							
<a href="#">T200X000VS1Y</a>	Green							
<a href="#">T200X000VT1Y</a>	Gray							
<a href="#">T200X000VU1Y</a>	Orange							
<a href="#">T200X000VV1Y</a>	Purple							
<a href="#">T200X000VW1Y</a>	Red							
<b>FEATURED</b> <a href="#">T200X000VX1Y</a>	Yellow							
<a href="#">T200X000VY1Y</a>	Black							
<a href="#">T200X000YK1</a>	Clear	Polyester	-40°F to 302°F (-40°C to 150°C)					
<b>FEATURED</b> <a href="#">T400X000VP1Y</a>	White	Vinyl	-58°F to 176°F (-50°C to 80°C)	4.00	101.6			
<a href="#">T400X000VQ1Y</a>	Blue							
<a href="#">T400X000VS1Y</a>	Green							
<a href="#">T400X000VT1Y</a>	Gray							
<a href="#">T400X000VU1Y</a>	Orange							
<a href="#">T400X000VV1Y</a>	Purple							
<b>FEATURED</b> <a href="#">T400X000VW1Y</a>	Red							
<b>FEATURED</b> <a href="#">T400X000VX1Y</a>	Yellow							
<a href="#">T400X000VY1Y</a>	Black							
<a href="#">T400X000YK1</a>	Clear							

Order number of rolls required in multiples of Standard Package Quantity.

\*Labels are roll mounted on 3.00" cores; when using the TDP43ME printer and 3.00" cores, the roll stand (TDP43ME-RS) is required.

## Non-Printable Clear Over-Laminate Continuous Tapes

- Over-laminates can be used for additional protection over the 2" and 4" continuous tapes
- When over-laminates are used with Super-Tack Polyester Labels, the labels meet DIN 40050-9, IP69K for washdown applications
- Temperature range: -40°F to 302°F (-40°C to 150°C)

Part Number	Color	Material	Width		Length		Std. Pkg. Qty.
			in	mm	ft	m	
<a href="#">T425X000YK1</a>	Clear	Polyester	4.25	107.9	100.0	30.5	1

Order number of labels required in multiples of Standard Package Quantity.

## Super-Tack Polyester Arc Flash Labels

- Provide employees with the highest degree of safety through proper identification and communication
- Detailed formats compliant with NFPA 70E standard for Arc Flash labeling
- Clearly visible and recognizable hazard information to communicate arc flash hazards present
- Meets DIN 40050-9, IP69K for washdown applications
- Labels are constructed of durable polyester designed to withstand UV exposure, outdoor use, water and abrasion
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized; File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



C200X400A51



C200X400YZ1




C400X400A51



C400X400YZ1



C400X600A51



C400X600YX1



C400X600YZ1

Part Number	Width		Height		Part Description	Std. Pkg. Qty. (Roll)
	in	mm	in	mm		
<a href="#">C200X400A51</a>	2.00	50.8	4.00	101.6	Polyester safety label, WARNING header orange and black, 250 labels per roll.	1
<a href="#">C200X400YZ1</a>					Polyester safety label, DANGER header red and white, 250 labels per roll.	
<a href="#">C400X400A51</a>	4.00	101.6			Polyester safety label, WARNING header orange and black, 250 labels per roll.	
<a href="#">C400X400YZ1</a>					Polyester safety label, DANGER header red and white, 250 labels per roll.	
<a href="#">C400X600A51</a>	4.00	101.6	6.00	152.4	Polyester safety label, WARNING header orange and black, 100 labels per roll.	
<a href="#">C400X600YX1</a>					Polyester safety label, orange header, 100 labels per roll.	
<a href="#">C400X600YZ1</a>					Polyester safety label, DANGER header red and white, 100 labels per roll.	

Order number of labels required in multiples of Standard Package Quantity

## Raised Panel Arc Flash Labels

- Super-Tack adhesive provides strong holding power for rough, textured, and powder-coated surfaces
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposures)
- Meet ASTM D3389 standard for abrasion resistance, and also meets solar application standards
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature Range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH 14979



C400X400ANT

Part Number	Color	Width		Height		Part Description	Std. Pkg. Qty. (Roll)
		in	mm	in	mm		
<a href="#">C400X400ANT</a>	Orange	4.00	101.6	4.00	101.6	Raised Panel Safety Label, WARNING header, White and Orange/Black	1
	White						

Order number of labels required in multiples of Standard Package Quantity

## Super-Tack Polyester Arc Flash Continuous Tapes



T400X000YX1



T400X000A91

- Super-tack polyester has ultra-aggressive adhesive
- Ideal for rough, textured, and coated surfaces
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized; File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979

Part Number	Width		Height		Part Description	Std. Pkg. Qty. (Roll)
	in	mm	ft	m		
T400X000YX1	4.00	101.6	50.0	15.2	Polyester arc flash continuous tape, orange header.	1
T400X000A91					Polyester arc flash continuous tape, red header.	

Order number of labels required in multiples of Standard Package Quantity

## Super-Tack Polyester Facility Identification Labels

- Facility Identification created quickly to comply with workplace safety regulations contributing to the protection of employees and equipment from unexpected hazards
- Meets DIN 40050-9, IP69K for washdown applications
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature range: -40°F to 302°F (-40°C to 150°C)
- UL969 recognized; File # MH14979; cUL recognized, C22.2 No. 0.15.01, File # MH14979



C400X600A41




C400X600A61



C400X600AX1



C400X600AY1



C400X600AZ1



C400X600Y81

Part Number	Width		Height		Part Description	Labels Per Row	Std. Pkg. Qty. (Roll)
	in	mm	in	mm			
C400X600A41	4.00	101.6	6.00	152.4	Polyester safety label, DANGER header, red and black/white, 100 labels per roll.	1	1
C400X600A61					Polyester safety label, CAUTION header, yellow/black, 100 labels per roll.		
C400X600AX1					Polyester safety label, NOTICE header, blue/white, 100 labels per roll.		
C400X600AY1					Polyester safety label, SAFETY FIRST header, green/ white, 100 labels per roll.		
C400X600AZ1					Polyester safety label, yellow header, 100 labels per roll.		
C400X600Y81					Polyester safety label, yellow, 100 labels per roll.		

Order number of labels required in multiples of Standard Package Quantity



## Raised Panel Solar Labels



- Print customized labels for solar applications
- Strong holding power for rough, textured, and coated surfaces
- Meet ASTM G154 for outdoor durability (simulating 20 years of UV resistance under normal conditions but not all outdoor exposures)
- Use thermal transfer resin ribbons shown on pages 26 and 27
- Temperature Range: -40°F to 212°F (-40°C to 100°C)
- UL969 recognized, File # MH14979, cUL recognized, C22.2 No. 0.15.01, File # MH 14979

Part Number	Color	Width		Height		Labels Per Row	Std. Pkg. Qty.
		in	mm	in	mm		
<a href="#">C200X100AWT</a>	Red	2.00	50.8	1.00	25.4	1	500
<a href="#">C300X250AWT</a>		3.00	76.2	2.50	63.5		
<a href="#">C400X100AWT</a>		4.00	101.6	1.00	25.4		

Order number of labels required in multiples of Standard Package Quantity

## Easy-Mark Plus™ Labeling Software



- Powerful, easy-to-use, and affordable software that provides innovative features and functionality to address unique labeling needs
  - Quickly create simple or complex labels with text boxes, lines, frames, or tables, and other useful tools
  - Design detailed labels with multiple zones and objects for applications such as rating plates, arc flash labels, and fiber optic enclosures
  - Simple user interface shows labels on the screen as they will be printed
  - Create and print labels using QR codes, or any of the other 21 included barcode symbologies
  - Upgrades available at <http://www.panduit.com/emp>
- System Requirements:**
- 300 MB hard drive space and 2 GB Memory
  - Windows 7, 8, 8.1, 10 or 11
  - 32 or 64 bit operating systems
  - Microsoft.NET Framework 2.0 or higher
  - Mouse or compatible pointing device
  - Keyboard
  - Optical Disc Drive or USB Port

Part Number	Description	Std. Pkg. Qty.	Std. Ctn. Qty.
<a href="#">EMPLUS-CD</a>	Easy-Mark Plus™ Labeling Software, CD-ROM.	1	10
<a href="#">EMPLUS-DL</a>	Easy-Mark Plus™ Labeling Software, online download.		
<a href="#">EMPLUS-2GO</a>	Easy-Mark Plus™ Portable Application, USB flash drive.		
<a href="#">EMPLUS-SERVER</a>	Easy-Mark Plus™ Labeling Software, networkable server based version.		

^Windows is a registered trademark of Microsoft Corp. in the United States and/or other countries.

## TDP43ME Desktop Printer and Accessories



- Creates durable, crisp, clear legends and graphics that offer superior legibility
- Prints durable legends for harsh industrial environments
- Fine resolution for small type characters and images
- Easy-Mark Plus™ Labeling Software included with printer
- Up to 4 inches per second print speed
- Auto-sensing label gap and black mark sensors
- One-button operation, and automatic self test
- Connects quickly and easily to PC, and offers connectivity flexibility to print by USB, parallel serial, or Ethernet
- Easy ribbon loading reduces printer down time
- Able to connect to a network for sharing capability
- UL60950 listed, File # E165747

Part Number	Part Description	Std. Pkg. Qty.
<b>BEST SELLER</b> TDP43ME	300 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with US power cord, USB cable, user manual, quick start card, and driver disk; for use in North America.	1
TDP43ME/E	300 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RMEH4BL black hybrid ribbon, EuroPlug cord, USB cable, user manual, quick start card, and driver disk; for use outside North America.	
<b>BEST SELLER</b> TDP43ME-KIT	TDP43ME printer kit. Includes: printer, Panduit® Easy-Mark Plus™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with US power cord, USB cable, user manual, quick start card, TDP43ME-RS Roll Stand, TDP43ME-CASE, one roll of S100X150VATY labels, and driver disk; for use in North America.	
TDP43ME/E-KIT	TDP43ME/E printer kit. Includes: printer, Panduit® Easy-Mark Plus™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with EuroPlug cord, USB cable, user manual, quick start card, TDP43ME-RS Roll Stand, TDP43ME-CASE, one roll of S100X150VATY labels, and driver disk; for use outside North America.	
TDP43ME-AC	Replacement AC power adapter with power cord (US cord only).	
TDP43ME-CASE	Hardside carrying case accommodates printer, AC power adapter, ribbons, printer cable, external roll stand, labels, and tools.	
TDP43ME-CUTTER	Optional power/automatic cutter for TDP43ME thermal transfer desktop printer; easy to install for automatic cutting of labels.	
TDP43ME-RS	External label roll stand for TDP43ME printer; used to rear feed labels that are supplied on 3" cores.	
TDP43ME-SPINDLE	Replacement ribbon spindle for TDP43ME Thermal Transfer Desktop Printer, Package of Two Spools.	
PTR-CLN	Printer cleaning kit – contains (1) cleaning pen, (8) cleaning solution soaked wipes, (8) foam swabs pre-saturated with cleaning solution, MSDS, and cleaning instructions.	

## TDP43ME Desktop Printer Ribbons

Part Number	Part Description	Width		Length		Std. Pkg. Qty.
		in	mm	ft	m	
RMER1BL	Black resin thermal transfer ribbon. Use with terminal block markers.	1.1	27.9	300.0	91.4	1
<b>BEST SELLER</b> RMEH4BL*	Black hybrid thermal transfer ribbon. Use with heat shrink, self-laminating, Turn-Tell®, tan polyimide labels, and vinyl cloth labels.	4.25	108.0			
<b>FEATURED</b> RMER4BL*^A	Black resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels.					
RMER4BL-A	Black resin thermal transfer ribbon. Use with high-temperature marker plates.					
RMER4BL-C	Black resin thermal transfer ribbon. Use with fluid-resistant heat shrink labels and white polyimide labels.					

Order number of ribbons required in multiples of Standard Package Quantity.

\*For 2.5" wide ribbons, replace 4 in part number with 2. For example, the part number of a 2.5" wide black hybrid thermal transfer ribbon is RMEH2BL.

^Other colors available, change "BL" to: BU for Blue, RD for Red, or WH for White (Example: RMER4BU = Blue Resin Ribbon).

## TDP43HET and TDP46HET Desktop Printers and Accessories



- Convenient, easy setup; quickly begin producing labels
- Durable, clear communication through superior legibility
- Print small, fine characters and high-quality images and bar codes
- Allow continuous use in construction, industrial, and harsh environments
- Reduce time required to switch between label styles
- Fast label production without sacrificing print quality
- Easy-Mark Plus™ Labeling Software included with printer
- Up to 12 inches per second print speed
- Connect quickly and easily to PC, and offers connectivity flexibility to print by USB, parallel, Ethernet or serial
- Available with 300 or 600 dots per inch print resolution
- Able to connect to a network for sharing capability
- UL60950 listed, File # E165747

Part Number	Part Description	Std. Pkg. Qty.
<b>FEATURED</b> TDP43HET	300 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk and US power cord; for use in North America.	1
TDP43HET/E	300 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk, and the following power cords: EuroPlug and UK; for use outside North America.	
<b>FEATURED</b> TDP46HET	600 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk, and US power cord; for use in North America.	
TDP46HET/E	600 dpi printer; includes printer, Panduit® Easy-Mark Plus™ Labeling Software, RHEH4BL black hybrid ribbon, USB cable, user manual, quick start card, driver disk, and the following power cords: EuroPlug and UK; for use outside North America.	
<b>PTR-CLN</b>	Printer cleaning kit – contains (1) cleaning pen, (8) cleaning solution soaked wipes, (8) foam swabs pre-saturated with cleaning solution, MSDS, and cleaning instructions.	

## TDP43HET and TDP46HET Desktop Printer Ribbons

Part Number	Part Description	Width		Length		Std. Pkg. Qty.
		in	mm	ft	m	
<b>FEATURED</b> RHEH4BL	Black hybrid thermal transfer ribbon. Use with heat shrink, self-laminating, Turn-Tell®, and vinyl cloth and tan polyimide labels.	4.33	110.0	1181.0	363.0	1
RHER4BL	Black resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels.					
RHER4WH	White resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels.					
RHER4BL-A	Black resin thermal transfer ribbon. Use with high-temperature marker plates.	4.33	110.0	1345.0	410.0	
RHER4BL-C	Black resin thermal transfer ribbon. Use with fluid resistant heat shrink markers and white polyimide labels.					
RHER4BL-E	Black resin thermal transfer ribbon. Used with standard marker plates and component labels for extra durability for harsh environments.					

Order number of ribbons required in multiples of Standard Package Quantity.

# PANDUIT®

Panduit Corp.  
World Headquarters  
Tinley Park, IL 60487

cs@panduit.com  
US and Canada: 800.777.3300  
Europe, Middle East, and Africa:  
44.20.8601.7200  
Latin America: 52.33.3777.6000  
Asia Pacific: 65.6305.7575

[www.panduit.com](http://www.panduit.com)

