

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

A

B

C




D

E

F

G

H

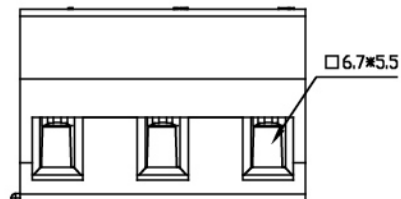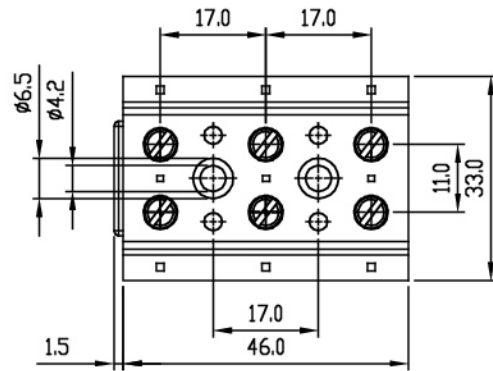

## Material

- ①Clamp: Brass,Ni plated
- ②Terminal screw: Steel Zinc plating "-" slot type
- ③Wire guard solder pin: Brass,Tin plated
- ④Terminal housing: Thermoplastic (UL94V-0) , GREY

## Electrical cULus

Voltage rating: 600V  
 Current rating: 65A  
 Wire range:  
 Solid wire(AWG): 6-22  
 Stranded wire(AWG): 6-22  
 Torque(Lb-In): 8.7Lb-In  
 Screw: M4  
 Wire strip length: 6-7mm  
 Withstanding Voltage: 2.2KV  
 Operating temperature: -40°C to +115°C  
 Soldering temperature: 250°C±10°C/5 Sec  
 Safety Approval: cULus

RoHS compliant



Scale	1:1					Date	Name	Customer-No.
TOLERANCE						Drawn	16.12.2010	Schulz
X.	±0.50					Approved	16.12.2010	Gerber
X.X	±0.30							
X.XX	±0.10							
DIM	TOL	①	UL Update	23.03.2017	C.Bakula			
X.°	±1°	②	Drawn	16.12.2010	Schulz			
Angle	TOL	Id.	Modification	Date	Name	Replace	ASS 4115B CO	rev01
							Sheet	

1

2

3

4

5

6

7