



P.C.B LAYOUT

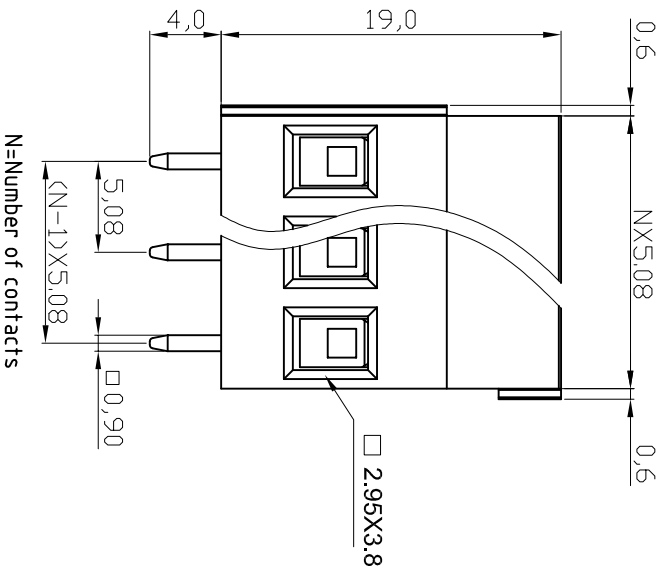


N=Number of contacts

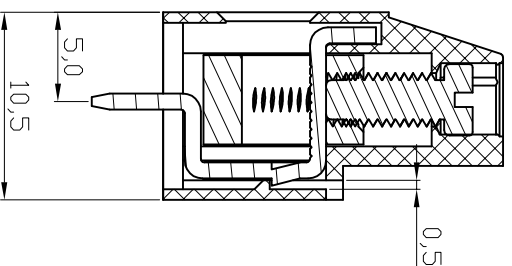


Material

Terminal body
(metal housing): Brass(CuZn)
Terminal screw: Steel Zinc plating "-" slot type
Contacts: Brass
Surface of solder tail: Tin plated
Insulator (housing): Thermoplastic (UL94V-0), Green

Electrical

Voltage rating: 300V/AC
Current rating: 20A
Solid wire(AWG): 12-30
Stranded wire(AWG): 12-30
Torque(Lb-In): 3.5
Screw: M3
Wire strip length: 6-7mm
Withstanding Voltage: 1.6KV
Operating temperature: -40°C to +115°C
Soldering temperature: 250°C±10°C/5 Sec
Safety Approval:  us

RoHS compliant

File No.: E349947

Scale	1:1		
TOLERANCE			
X.	±0.50		
X.X	±0.30		
X.XX	±0.10		
DIM			
X.°	±1°		
X.X°	±X°		
Angle	TOL	Id.	Modification
		②	Add the UL File No.
		①	Drawn
			Date
			Name
			Date
			Name
			Date
			Name

ASSMANN
WSW/ components

Customer-No.
ASSMANN WSW-No.
A-TB508-VJXH
Drawing-No.
ASS 3595 CO
Replace

rev02
Sheet

1	2	3	4	5	6	7	A
1	2	3	4	5	6	7	B
1	2	3	4	5	6	7	C
1	2	3	4	5	6	7	D
1	2	3	4	5	6	7	E
1	2	3	4	5	6	7	F
1	2	3	4	5	6	7	G
1	2	3	4	5	6	7	H
1	2	3	4	5	6	7	svxxxx