


P	LTR	DESCRIPTION	DATE	DWN	APVD
	G2	REVISED PER ECO-11-004820	11MAR11	RK	HMR
	G3	REVISED PER ECO-17-007400	29NOV2017	RS	DR

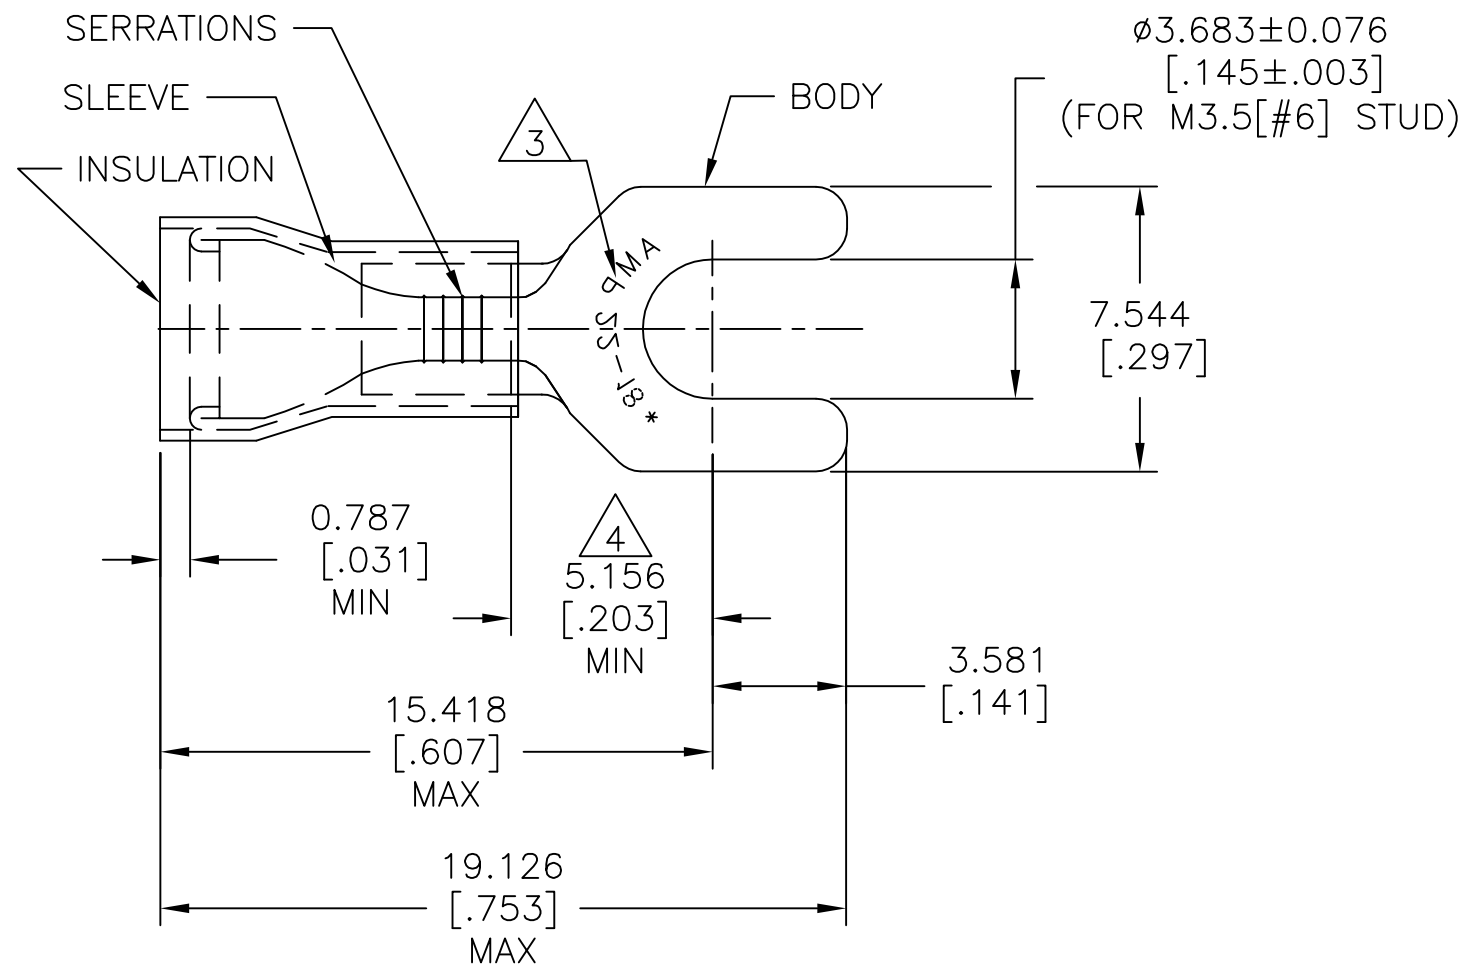

<b>AMP</b> WIRE RANGE	E13288 Listed	LR7189 Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

- 1 BODY MATERIAL THICKNESS = 0.787±0.051[.031±.002]
- 2 FOR  $\phi 2.667[\phi .105]$  TO  $\phi 3.556[\phi .140]$  WIRE INSULATION.

- 3 STAMP AMP 22-18\* APPROX AS SHOWN.  
22-16 TERMINALS ARE STAMPED  
22-18 IN ACCORDANCE WITH  
MILITARY SPEC SAE AS 7928.  
COMMERCIAL RANGE IS 22-16.
- 4 APPLIES FROM EDGE OF METAL WIRE BARREL TO  
CENTER OF STUD HOLE.
- 5 MATERIAL:  
BODY & SLEEVE: COPPER (ASTM-B152)  
INSULATION: NYLON.
- 6 FINISH:  
BODY & SLEEVE: TIN PLATED (ASTM-B545)  
INSULATION: COLOR-RED.

5000	ON TAPE	2-326861-1
1000	LOOSE PIECE	326861
QTY	PACKAGE TYPE	PART NO


CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]
VOLTAGE RATING: 300V MAX
CIRCULAR MIL AREA: 0.26-1.65mm <sup>2</sup> [509-3,260] SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
mm [INCHES]



TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± 0.127[.005]
4 PLC	± -
ANGLES	± .5°
FINISH	

MATERIAL



DWN	JR RUTH	15JUL09
CHK	TOM MICHIELUTTI	15JUL09
APVD	TOM MICHIELUTTI	15JUL09
PRODUCT SPEC	UL 486 A-B	
APPLICATION SPEC	114-2157	
WEIGHT	-	
CUSTOMER DRAWING		

<b>STE</b> TE Connectivity			
WIRE-TERMINAL PIDG-SPADE WIRE SIZE: 22-16 AWG			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=326861	-
SCALE		SHEET	REV
5:1		1 OF 1	G3