


環保物料專用
RoHS compliant




SPECIFICATIONS

Current rating :1A AC,DC
 Voltage rating :50V AC,DC
 Temperature range :−25°C ~ +85°C
 Contact resistance :20mΩMax
 Insulation resistance :100MΩMin
 Withstanding voltage :500V AC/minute
 Pin Material :Phosphor Bronze
 Finished :Tin-plated
 Housing Material :Nylon-6T,UL94 V-0
 Color :Black

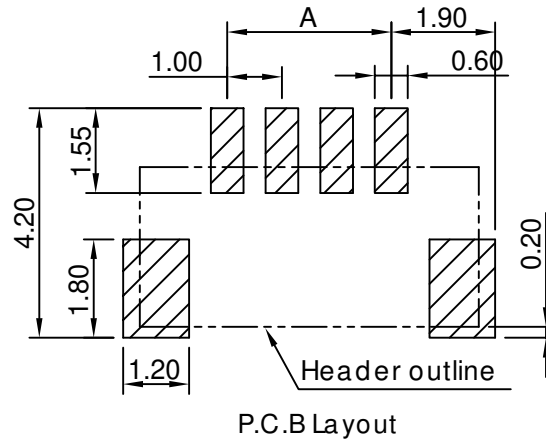

P.C.B Layout

Circuits	Dimensions	
	A	B
02	1.00	4.00
03	2.00	5.00
04	3.00	6.00
05	4.00	7.00
06	5.00	8.00
07	6.00	9.00
08	7.00	10.00
09	8.00	11.00
10	9.00	12.00
11	10.00	13.00
12	11.00	14.00
13	12.00	15.00
14	13.00	16.00
15	14.00	17.00
16	15.00	18.00
17	16.00	19.00
18	17.00	20.00
19	18.00	21.00
20	19.00	22.00

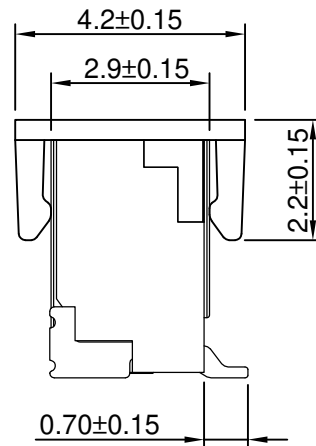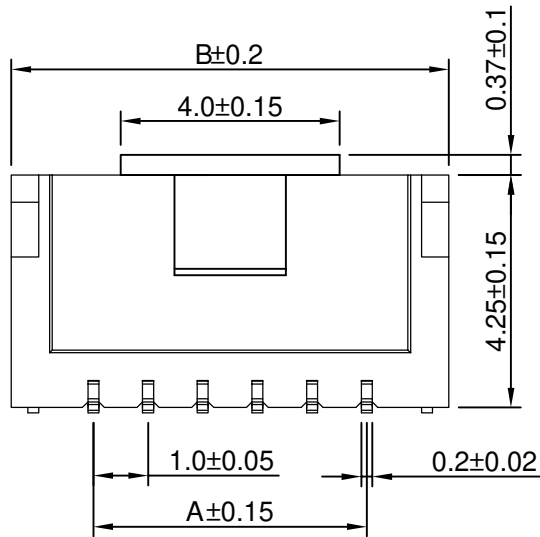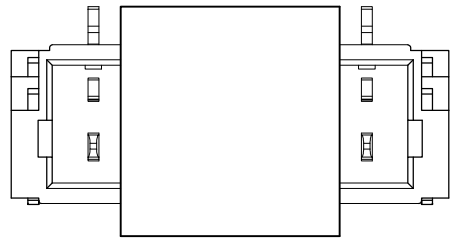

DESCRIPTION(內容):
1.00MM WAFER 180° SMT TYPE
REEL+CAP

DRAWN(製圖):
Tom Liu
CHECKED(確認):
Jack Wu

GENERAL TOLERANCE	
LINEAR	ANGLES
X.: ±0.30	X°: ±5.0°
X.X: ±0.20	X.X°: ±3.0°
X.XX: ±0.15	X.XX°: ±2.0°
X.XXX: ±0.10	X.XXX°: ±1.0°

REV: A/1
UNIT: mm
SHEET: 1/1

REV: 1, 2, 3, 4


DESCRIPTION: ORIGINAL
DATE: Jul-26-2019

PART NO: CESH-W10-XX-BK-RC
(料號)
DWG NO(圖號): KWRD190726-018

APPROVAL(核准):
Kane He

A4

SCALE(比例): 1:XX



A

B

C

D

E