

NOTES:


1.0 ELECTRICAL SPECIFICATIONS

- 1.1 FREQUENCY RANGE: DC TO 18.0 GHz
- 1.2 MAXIMUM INPUT POWER:
2 WATTS AVG AT +25°C DERATED LINEARLY TO 0.5 WATTS AT +125°C.
- 1.3 OPERATING TEMPERATURE RANGE: -55°C TO +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 VSWR: 1.25:1 MAX.

2.0 MARKING

- 2.1 MARK UNIT AS SHOWN:
(REF: INK-02611-27-19)

3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

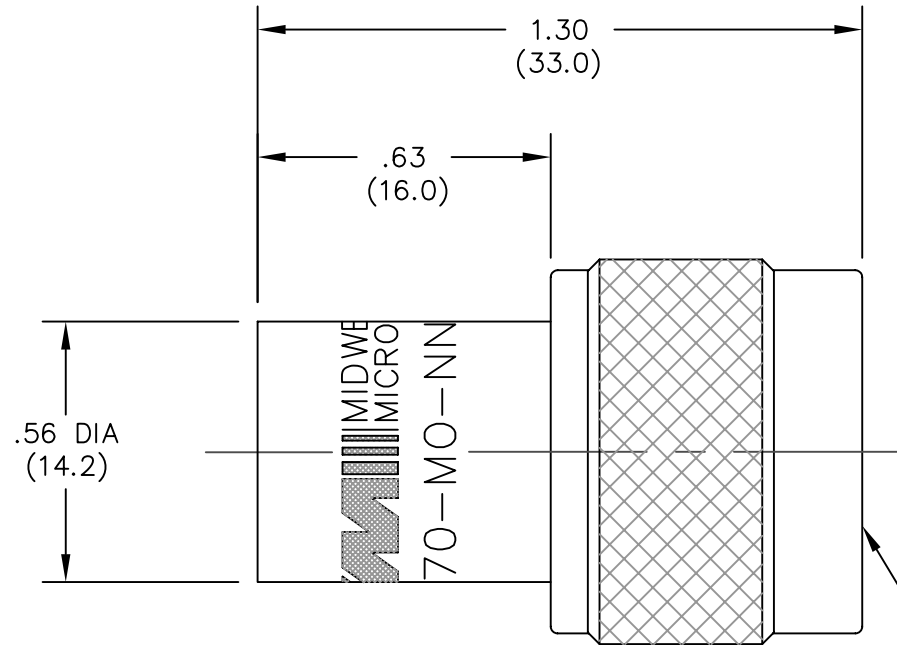

TYPE N MALE CONNECTOR
PER MIL-PRF-39012

MODEL NUMBER
TRM-2070-MO-NN-07

REV.	DESCRIPTION	DATE
-	RELEASED	9/22/92
A	ECR 6545	6/30/89
B	ECR 7129	2/23/90
C	ECR 10356	4/19/91
D	ECN 10759	7/10/91
E	REDRAW ON CAD	8/21/92
E1	ADDED TITLEBLOCK	10/27/05

DWG. WAS: 02712-01-00

<p>NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.</p> <p>UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'</p>	<p>CAGE CODE 34078</p>	<p>MIDWEST MICROWAVE</p>		
	<p>EMERSON Network Power Connectivity Solutions</p>		<p>TITLE TERMINATION OUTLINE DRAWING</p>	
	<p>DRAWN/DATE M.HOLLMAN 8/21/92</p>	<p>ENG./DATE G.KOZAK 9/21/92</p>	<p>DRAWING NUMBER TRM-2070-MO-NN-07-01</p>	<p>REV. E1</p>
	<p>CHECKED/DATE A.BEATTY 9/10/92</p>	<p>APPROVED/DATE</p>	<p>SCALE: 5=1</p>	<p>SHEET 1 of 1</p>