

-		 		
	دی ا	 111	0	0



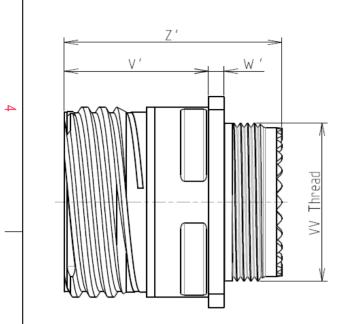

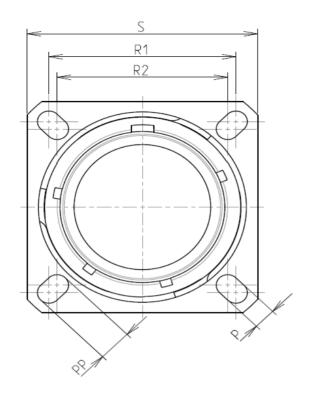

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
2	-Contact Plating	: Gold over copper Alloy 0.8μm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 2000 hours			
	-Mass	: 13.4 g ± 10%			

8D 0

G

11

Μ

05

В

F

А

Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Z'	32 Max		
VV THREAD	M15x1-6g		


**ORIENTATION : A** 

CONTACT LAYOUT : 11-05

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

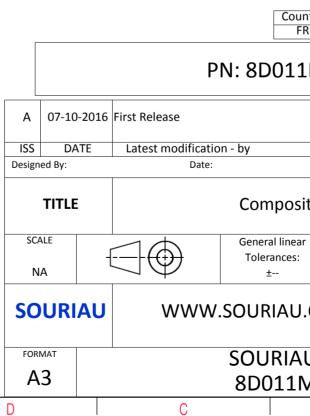

σ		Þ		
				4
S EXAMPLE				3
any non-conformit which does not co or of the Parties or b idation, technical n intry Jurisc R 1M05BA	mply with by a third part			2
	CUSTOMER	RDRAWING	MOD N°	
ite Receptacle 8D series				
ar	NPRDS / PROJECT 859			
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				1
U DRG N°	1		SHEET	
M05BA-C	1	A	1/2	J
J	I	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~		

r	τ	۵	н П	m		0	
		Contact Layout				р	anel Cutou
4	-x	$\stackrel{E \bigoplus \cdots \bigoplus^{A}}{\cdots} \cdots \xrightarrow{D \bigoplus \cdots} \cdots \longrightarrow $				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Conti positi ID A B C C D E Shell Arrangement Num size no. cont	Non  X-axis (mm)  Y-axis (mm)    + 0.65 (1.65)  +.056 (1.42)    + 1.13 (2.87) 065 (1.65)    + 0.00 (0.00) 130 (3.30)   113 (2.87) 065 (1.65)   065 (1.65)  +.056 (1.42)    ber of  Size  Service  Contactt  Supersedes    tacts  contacts  rating  location  Supersedes			~		<u>ØT</u>
ى	11 -5 5	5 20 I All MS20050-5				Dim ØA ØAA R1 ØT	
						SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	roducts whi by either of
N						PN: 8[	Country FR D011N
						-2016 First Release	
					ISS DA Designed By:	TE Latest modification - by Date:	
					SCALE		mposite
<b>_</b>					NA		eral linear erances: ±
					SOURI	AU WWW.SOUR	RIAU.C
				_	FORMAT A3		JRIAU 011M
	Н	G	F	E	D	С	

