
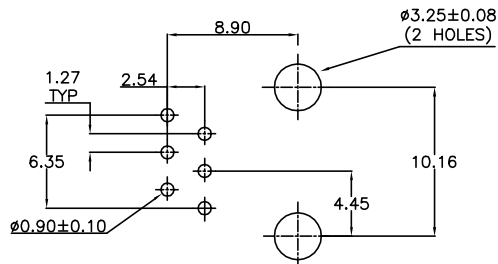
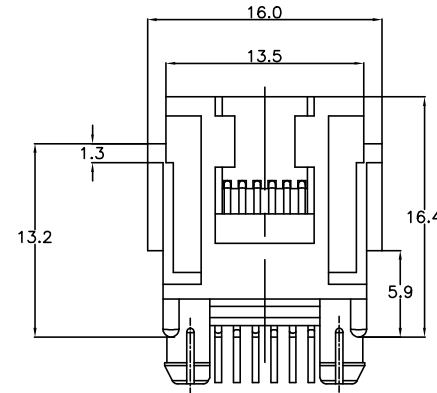
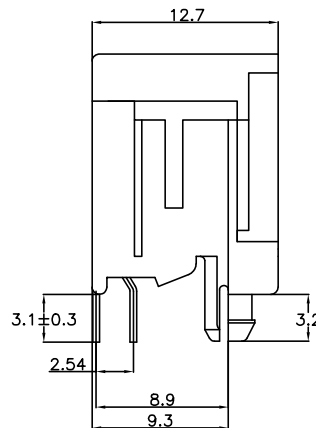
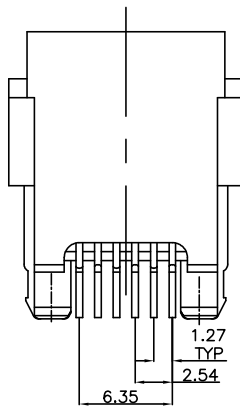


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
J7		ECO-19-018009 (SEE PAGE NO 3)	18SEP2019	RR	SH


NOTES:

1. TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.15
2. FOR APPLICATION INFORMATION SEE AMP SPEC. 114-19019.
3. FOR PERFORMANCE REQUIREMENTS SEE AMP SPEC. 108-19064



PRINTED CIRCUIT BOARD LAYOUT

[VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.]
 TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.05
 PRINTED CIRCUIT BOARD THICKNESS: 1.6 mm NOMINAL.



800 PCS. ON A 60cm. DIA. REEL	6 POSITIONS/ 6 CONTACTS.	IN CONTACT AREA: 1.2µm MIN. SEL. GOLD OVER 1.2µm MIN. NICKEL	HOUSING: PBT,UL 94V-HB COLOR: BLACK	216548-1
PACKAGING	REMARKS	FINISH	MATERIAL	PART NUMBER
		SOLDER TINES: 2.0µm MIN. TIN OVER 1.2µm MIN. NICKEL	CONTACTS: PHOSPHOR BRONZE	






THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.V.LIEMPT	22JAN92	TE Connectivity																						
DIMENSIONS: mm		CHK C.STERKEN	APVD L.V.SOEST	NAME																						
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		MODULAR JACK, 6 POS. TOP ENTRY, SMALL SIZE WITH PANEL STOPS, FOR PCB																						
<table border="1"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>-</td></tr> <tr><td>3 PLC</td><td>±</td><td>-</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> <tr><td>FINISH</td><td>±</td><td>-</td></tr> </table>		0 PLC	±	-	1 PLC	±	-	2 PLC	±	-	3 PLC	±	-	4 PLC	±	-	ANGLES	±	-	FINISH	±	-	APPLICATION SPEC		RESTRICTED TO	
0 PLC	±	-																								
1 PLC	±	-																								
2 PLC	±	-																								
3 PLC	±	-																								
4 PLC	±	-																								
ANGLES	±	-																								
FINISH	±	-																								
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SCALE	SHEET	REV																					
			A2	00779	©=216548																					
CUSTOMER DRAWING			SCALE	SHEET	REV																					
				1 of 3	J7																					

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTN	DESCRIPTION	DATE	DMN	APVD
-	-	SEE SHEET 1	-	-	-


NOTES:

1. TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.15
2. FOR APPLICATION INFORMATION SEE AMP SPEC. 114-19019.
3. FOR PERFORMANCE REQUIREMENTS SEE AMP SPEC. 108-19064

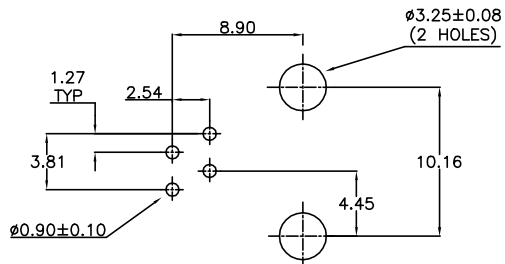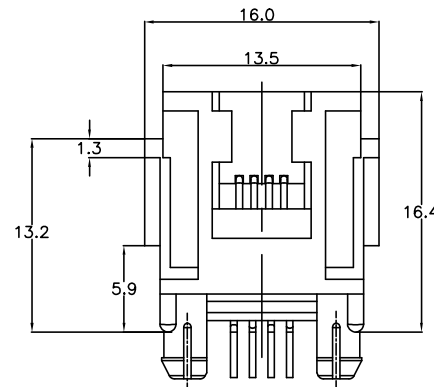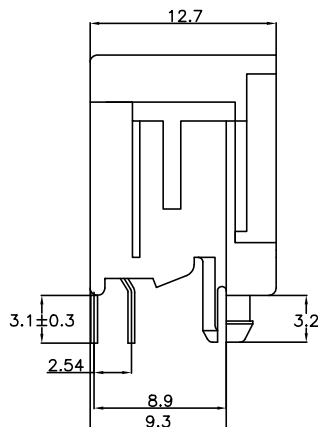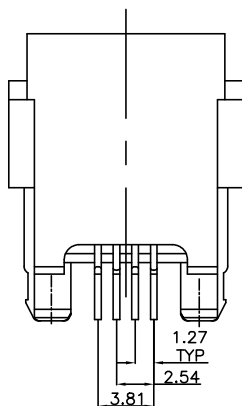

PRINTED CIRCUIT BOARD LAYOUT

[VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.]
 TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.05
 PRINTED CIRCUIT BOARD THICKNESS: 1.6 mm NOMINAL.



800 PCS. ON A 60cm. DIA. REEL	6 POSITIONS/ 4 CONTACTS.	IN CONTACT AREA: 1.2µm MIN. SEL. GOLD OVER 1.2µm MIN. NICKEL SOLDER TINES: 2.0µm MIN. TIN OVER 1.2µm MIN. NICKEL	HOUSING: PBT, UL 94V-HB COLOR: BLACK CONTACTS: PHOSPHOR BRONZE	216548-2
PACKAGING	REMARKS	FINISH	MATERIAL	PART NUMBER





THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN J.V. LIEMPT 22JAN92	TE Connectivity																								
DIMENSIONS: mm		CHK C. STERKEN	NAME																								
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD L.V. SOEST	PRODUCT SPEC																								
<table border="1"> <tr><td>0</td><td>PLC</td><td>±</td><td>-</td></tr> <tr><td>1</td><td>PLC</td><td>±</td><td>-</td></tr> <tr><td>2</td><td>PLC</td><td>±</td><td>-</td></tr> <tr><td>3</td><td>PLC</td><td>±</td><td>-</td></tr> <tr><td>4</td><td>PLC</td><td>±</td><td>-</td></tr> <tr><td></td><td>ANGLES</td><td>±</td><td>-</td></tr> </table>		0	PLC	±	-	1	PLC	±	-	2	PLC	±	-	3	PLC	±	-	4	PLC	±	-		ANGLES	±	-	APPLICATION SPEC	
0	PLC	±	-																								
1	PLC	±	-																								
2	PLC	±	-																								
3	PLC	±	-																								
4	PLC	±	-																								
	ANGLES	±	-																								
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT -	SIZE A2	CAGE CODE 00779																							
		DRAWING NO. ©=216548		RESTRICTED TO -																							
		CUSTOMER DRAWING		SCALE - SHEET 2 of 3 REV J7																							

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

NOTES:

1. TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.15
2. FOR APPLICATION INFORMATION SEE AMP SPEC. 114-19019.
3. FOR PERFORMANCE REQUIREMENTS SEE AMP SPEC. 108-19064

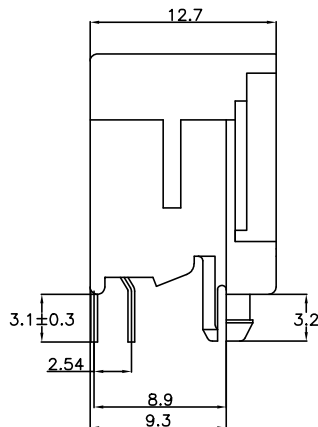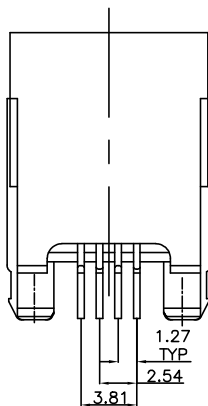


Ⓝ ONLY VIEW UPDATED

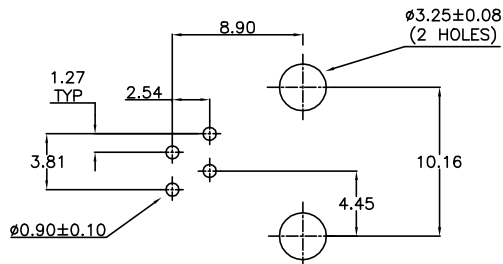

PRINTED CIRCUIT BOARD LAYOUT

[VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.]
 TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.05
 PRINTED CIRCUIT BOARD THICKNESS: 1.6 mm NOMINAL.



240 PCS. IN ONE TRAY	6 POSITIONS/ 4 CONTACTS.	IN CONTACT AREA: 1.2μm MIN. SEL. GOLD OVER 1.2μm MIN. NICKEL SOLDER TINNES: 2.0μm MIN. TIN OVER 1.2μm MIN. NICKEL	HOUSING: PBT,UL 94V-HB COLOR: BLACK CONTACTS: PHOSPHOR BRONZE	1-216548-5
240 PCS. IN ONE TRAY	6 POSITIONS/ 4 CONTACTS.	IN CONTACT AREA: 1.2μm MIN. SEL. GOLD OVER 1.2μm MIN. NICKEL SOLDER TINNES: 2.0μm MIN. TIN OVER 1.2μm MIN. NICKEL	HOUSING: PBT,UL 94V-V0 COLOR: GRAY CONTACTS: PHOSPHOR BRONZE	216548-6
800 PCS. ON A 60cm. DIA. REEL	6 POSITIONS/ 4 CONTACTS.	IN CONTACT AREA: 1.2μm MIN. SEL. GOLD OVER 1.2μm MIN. NICKEL SOLDER TINNES: 2.0μm MIN. TIN OVER 1.2μm MIN. NICKEL	HOUSING: PBT,UL 94V-HB COLOR: BLACK CONTACTS: PHOSPHOR BRONZE	216548-5
PACKAGING	REMARKS	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 22JAN92

CHK L.V.LIEMPT

CHK C.STERKEN

APVD L.V.SOEST

PRODUCT SPEC

APPLICATION SPEC

FINISH

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME

MODULAR JACK, 6 POS. TOP ENTRY, SMALL SIZE WITHOUT PANEL STOPS, FOR PCB

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A2 00779 C=216548

SCALE SHEET 3 of 3 REV J7