STRADA-IP-2X6-T4-B

Wide IESNA Type IV beam with forward-throw beam for wide area lighting like car parks

SPECIFICATION:

Dimensions 71.4 x 173.0 mm

Height 10.6 mm

Fastening screw

Ingress protection classes IP67

ROHS compliant yes 1



MATERIALS:

ComponentTypeMaterialColourFinishSTRADA-IP-2X6-T4-BMulti-lensPMMAclear2X6-SEAL25SealSiliconewhite

ORDERING INFORMATION:


» Box size: 476 x 273 x 247 mm

 Component
 Qty in box
 MOQ
 MPQ
 Box weight (kg)

 CS15158_STRADA-IP-2X6-T4-B
 Multi-lens
 120
 40
 40
 7.8



PRODUCT CS15158_STRADA-IP-2X6-T4-B

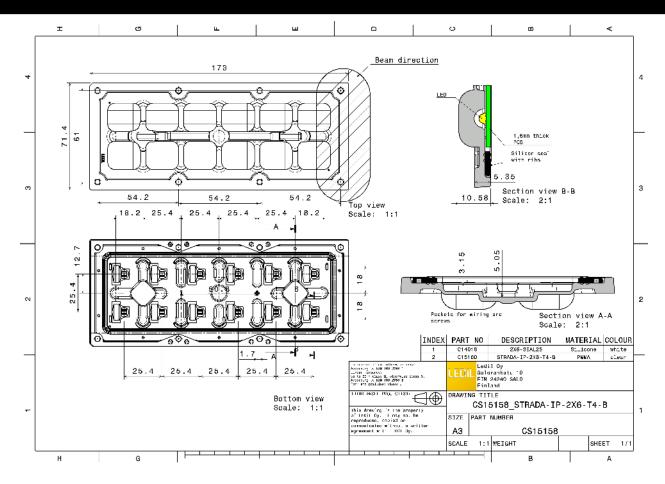

See also our general installation guide: www.ledil.com/installation_guide


OPTICAL RESULTS (MEASURED):



LED Bridgelux SMD 5050

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White


Required components:



COMET

LED QUICK FLUX 2x6 LED XG xxx G7+


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:



COMET

LED QUICK FLUX 2x6 LED XT xxx G5


FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:



CREE - LED

LED XP-G2
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 1 cd/lm
LEDs/each optic 1


Light colour White Required components:








LEDs/each optic Light colour White Required components:



CREE - LED

LED XP-L2 FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm LEDs/each optic 1


White Light colour Required components:



CREE - LED

LED XT-E FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 0.9 cd/lm


LEDs/each optic Light colour White Required components:



CREE - LED

XT-E HE FWHM / FWTM Asymmetric Efficiency 92 % Peak intensity 1 cd/lm LEDs/each optic


White Light colour Required components:





LUXEON 5050 Round LES


 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm LEDs/each optic Light colour White Required components:



LUMILEDS

LED LUXEON T FWHM / FWTM Asymmetric Efficiency 92 % Peak intensity 1 cd/lm LEDs/each optic 1 White Light colour


Required components:



MUMILEDS

LED LUXEON V $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 88 % Peak intensity 0.6 cd/lm


LEDs/each optic Light colour White Required components:




MUMILEDS


LED LUXEON V2 FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 0.9 cd/lm LEDs/each optic

White Light colour Required components:



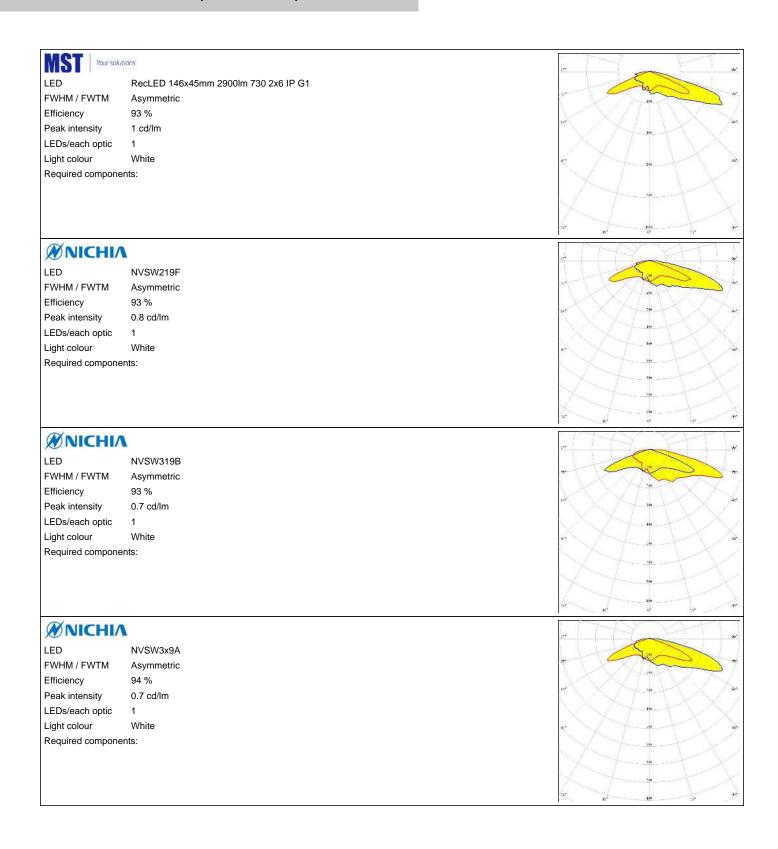


6/20

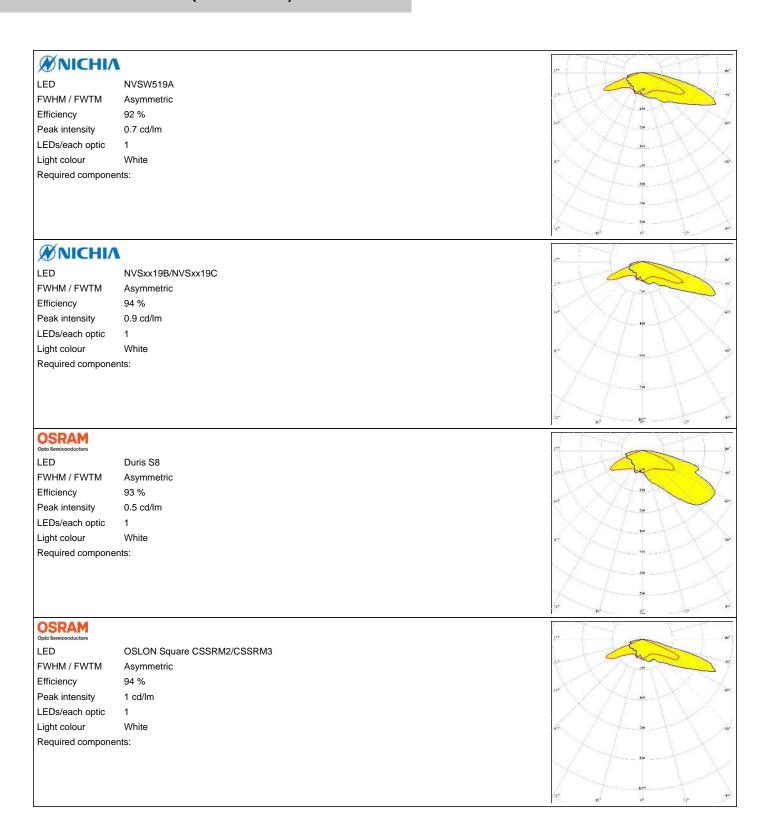


Fortimo FastFlex LED 2x6 DP G4

FWHM / FWTM Asymmetric Efficiency 92 % Peak intensity 1 cd/lm LEDs/each optic Light colour White Required components:



Fortimo FastFlex LED 2x6 DP G5 LED


FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 0.9 cd/lm LEDs/each optic 1 White Light colour Required components:



SAMSUNG

HiLOM RH12 (LH351C) LED

FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.9 cd/lm LEDs/each optic Light colour White




SAMSUNG


Required components:

HiLOM RM12 ZP (LH502C)


FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 0.5 cd/lm LEDs/each optic White Light colour Required components:





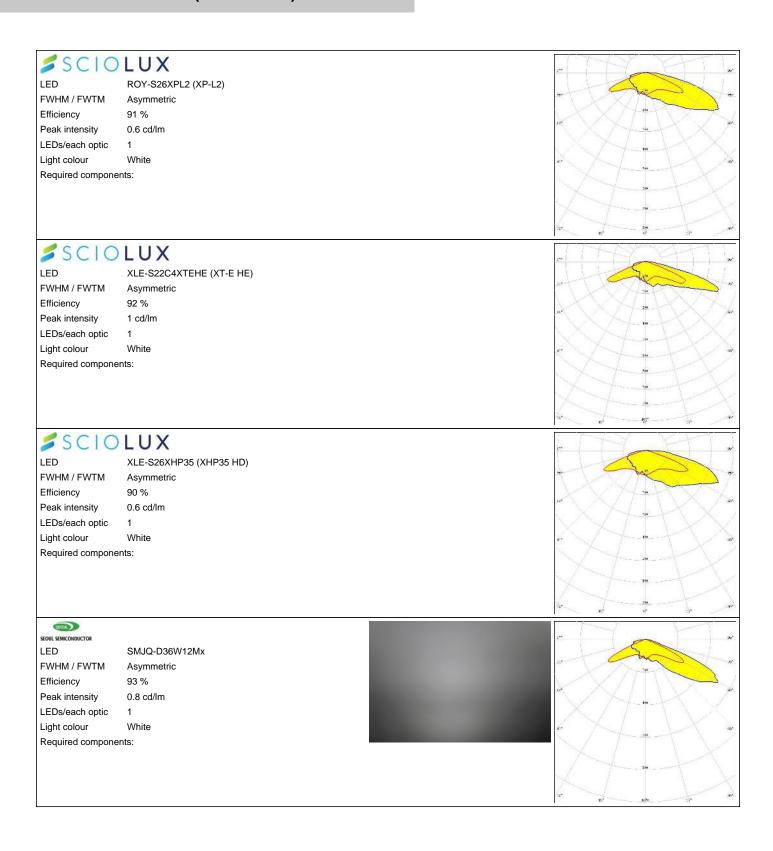




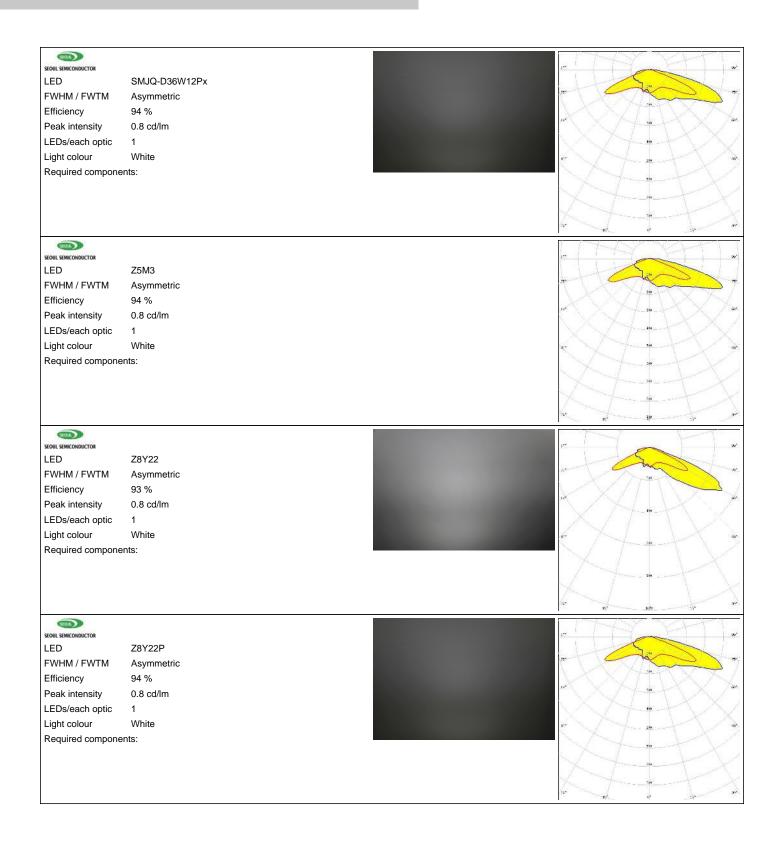

TRIDONIC

LED RLE 2x6 3000lm HP EXC2 OTD

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:




OPTICAL RESULTS (SIMULATED):



LED J Series 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 89 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:




CREE \$\(\phi\) LED

LED J Series 5050 Square LES 6V

FWHM / FWTM Asymmetric
Efficiency 89 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:




CREE = LED

LED XHP35 HD
FWHM / FWTM Asymmetric
Efficiency 73 %
Peak intensity 0.3 cd/lm

LEDs/each optic 1
Light colour White
Required components:


Protective plate, glass



CREE & LED

LED XHP35 HD
FWHM / FWTM Asymmetric
Efficiency 90 %
Peak intensity 0.6 cd/lm


LEDs/each optic 1
Light colour White
Required components:





LED XHP35 HI FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 0.8 cd/lm LEDs/each optic Light colour White


Required components:



CREE - LED

LED XM-L2 FWHM / FWTM Asymmetric Efficiency 92 % Peak intensity 0.7 cd/lm LEDs/each optic 1 White Light colour


Required components:



CREE + LED


LED XP-G2 HE FWHM / FWTM Asymmetric Efficiency 86 % Peak intensity 0.6 cd/lm LEDs/each optic Light colour White

Required components:



CREE - LED

XP-G3 FWHM / FWTM Asymmetric 87 % Efficiency Peak intensity 0.8 cd/lm LEDs/each optic White Light colour Required components:



CREE \$\(\phi\) LED

LED XP-L HI
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White


MUMILEDS

Required components:

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 88 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White


Required components:



DUMILEDS

LED LUXEON C
FWHM / FWTM Asymmetric
Efficiency 85 %
Peak intensity 0.4 cd/lm
LEDs/each optic 4
Light colour RGBW


Required components:




WNICHIA

LED NCSxx19B
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White

Required components:



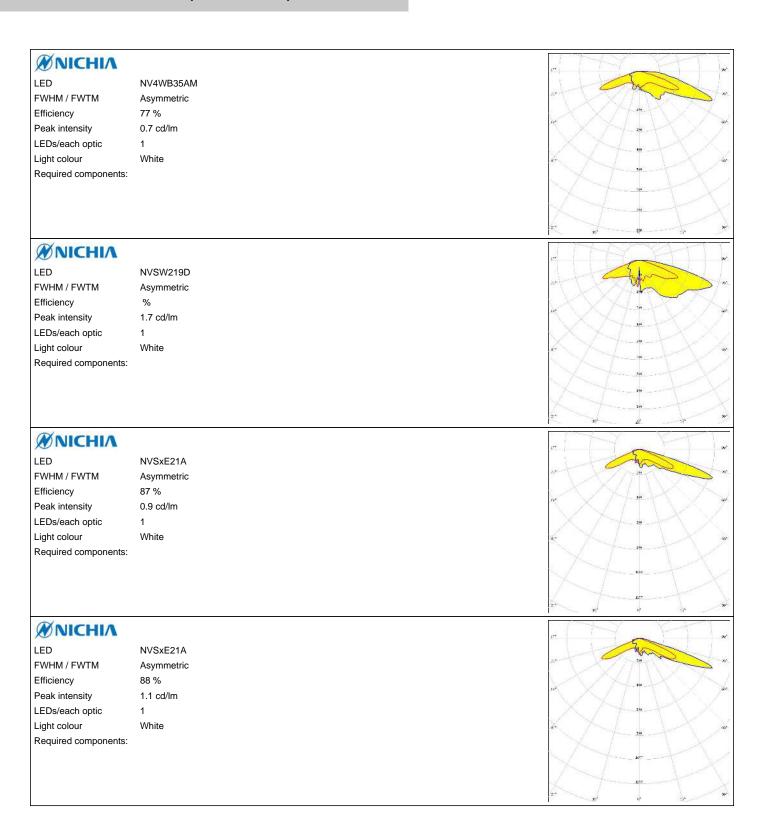


OPTICAL RESULTS (SIMULATED):

LED PrevaLED Brick HP IP 2x6

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 88 % Peak intensity 0.7 cd/lm LEDs/each optic Light colour White

Required components:




OSRAM Opto Semiconductor

LED OSCONIQ P 3737 (3W version)

FWHM / FWTM Asymmetric Efficiency 88 % Peak intensity 0.6 cd/lm LEDs/each optic 1 White Light colour

Required components:




OSRAM Opto Semiconductors

LED OSCONIQ P 3737 (3W version)

FWHM / FWTM Asymmetric Efficiency 88 % Peak intensity 0.6 cd/lm LEDs/each optic Light colour White


Required components:



OSRAM Opto Semiconductors

LED OSLON Square PC

FWHM / FWTM Asymmetric 93 % Efficiency Peak intensity 0.9 cd/lm LEDs/each optic White Light colour Required components:



16/20


OPTICAL RESULTS (SIMULATED):

PHILIPS

LED Fortimo FastFlex LED 2x6 DPX G4

FWHM / FWTM Asymmetric
Efficiency 81 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White

Required components:




SAMSUNG

LED LH181B
FWHM / FWTM Asymmetric
Efficiency 89 %
Peak intensity 0.9 cd/lm

LEDs/each optic 1
Light colour White


Required components:



SAMSUNG

LED LH231B
FWHM / FWTM Asymmetric
Efficiency 89 %
Peak intensity 0.8 cd/lm

LEDs/each optic 1
Light colour White
Required components:




SAMSUNG

FWHM / FWTM Asymmetric
Efficiency 88 %
Peak intensity 0.7 cd/lm

Peak intensity 0.7 cd
LEDs/each optic 1
Light colour White

Required components:



OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED LH351D FWHM / FWTM Asymmetric

Efficiency 86 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1
Light colour White

Required components:



SAMSUNG

LED LH502D

FWHM / FWTM Asymmetric


Efficiency 90 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:



SEOUL SEMICONDUCTOR

LED SEOUL DC 5050 6V


FWHM / FWTM Asymmetric

Efficiency 89 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1
Light colour White

Light colour
Required components:




SEQUE SEMICONDUCTOR

LED Z5M1/Z5M2 FWHM / FWTM Asymmetric Efficiency 85 %

Peak intensity 1.1 cd/lm LEDs/each optic 1

Light colour White Required components:







GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

20/20

www.ledil.com/ where_to_buy