


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CE	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
		D		ECO-15-003745	13MAR2015	BB	JO

- 1 MAXIMUM CONNECTOR INSERTION LOSS IS 0,2dB PLUS CABLE ATTENUATION OF 1,5dB/Km AT 1300nm(SEE TABLE)
2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE STANDARD TEC-138-702

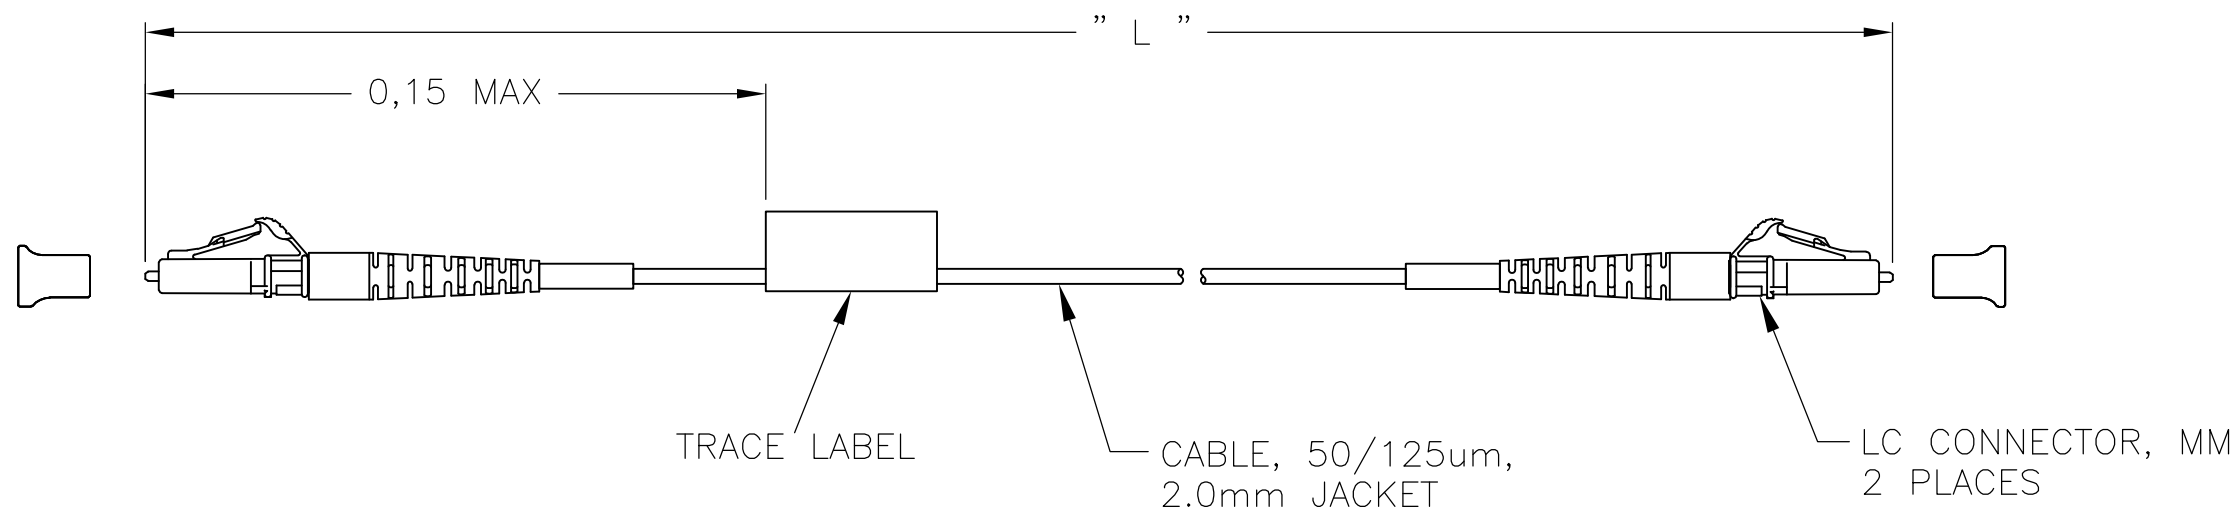

0.20	0.200+0.030/-0.000 [7.87+1.18/-0.00]	8-6374656-0
0.22	10.00±0.15 [393.70±6.00]	1-6374656-0
0.21	5.00±0.08 [196.9±3.1]	6374656-5
0.21	4.00±0.08 [157.5±3.00]	6374656-4
0.20	3.00±0.05 [118.1±2.0]	6374656-3
0.20	2.00±0.05 [78.7±2.0]	6374656-2
0.20	1.00±0.05 [39.4±2.0]	6374656-1
MAX IL(dB) Δ 1	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.S.VASU 15SEP05	TE Connectivity	
DIMENSIONS: METERS [INCHES]		CHK J.DUNCAN 15SEP05		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.DUNCAN 15SEP05	NAME CABLE ASSEMBLY, FIBER OPTIC, 50/125um, 2.0mm LC TO LC	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC -	APPLICATION SPEC -	
MATERIAL -	FINISH -	WEIGHT -	SIZE A3	CAGE CODE 00779
CUSTOMER DRAWING			DRAWING NO C-6374656	RESTRICTED TO -
			SCALE NTS	SHEET 1 OF 1
			REV D	