



PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 26672, BS	03/02/17	MK
B	CONFIRM: CORDSET COLOR WHITE, RFS. 26699, MK	03/21/17	MK
C	REMOVE 'TEST' FROM TABLE, RFS. 26742, RC	04/25/17	MK

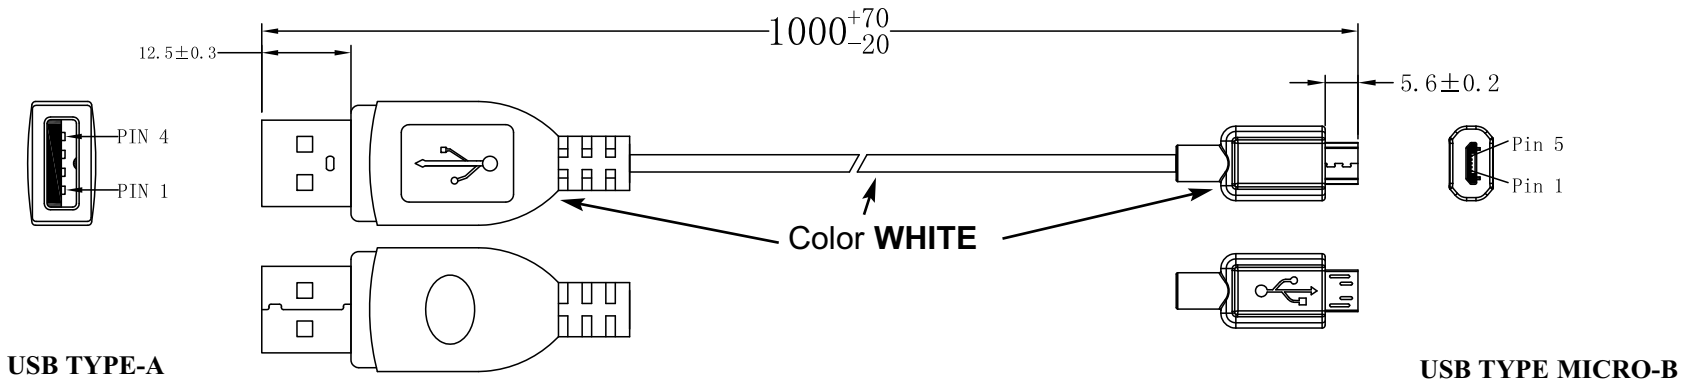

USB TYPE A	MICRO USB-B
1 — RED	1 #22*1C
2 — WHITE	2 } #28*1P
3 — GREEN	3 }
4 — BLACK	4 NO CONNECT
5 — DRAIN + BRAID	5 #22*1C
SHELL	SHELL

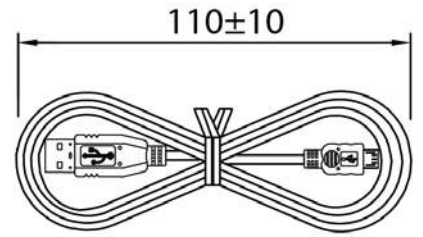

TITLE	DESCRIPTION
HEAT SHRINK TUBE	O.D. 0.8, COLOR: WHITE
CONNECTOR SHELL	NICKEL PLATED STEEL
CONNECTOR SHELL	NICKEL PLATED STEEL
CABLE	UL2725 WHITE 28 AWG TWISTED PAIR + 2X 22 AWG, SHIELDED
USB TYPE A PLUG	CONTACT GOLD PLATED 30u"
USB MICRO B PLUG	CONTACT GOLD PLATED 30u"

RELEASED
 By N.Frost at 4:35 pm, Apr 25, 2017



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: BS	DATE: 03/02/17	DWG TITLE: DETACHABLE USB CORD USB TYPE-A TO USB TYPE MICRO-B, COLOR WHITE		REV. C
DRAWN: NF	DATE: 03/02/17	FSCN No.: G, CC	SIZE A	
APRVD: HM	DATE: 03/02/17	SCALE: NONE	PART NO: USBA1M0MICROBCHGW(R)	SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice