
PROPRIETARY INFORMATION:		REVISION					
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK.INC.	REV	DESCRIPTION	DATE	APPROVED			
	Α	INITIAL RELEASE, RFS. 23953, EM	12/21/12	HM			

PACKING:

BULK PACK, NO BUNDLES, NO HANK, NO TIE

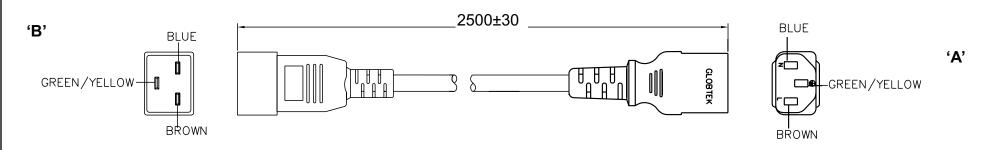

GENERAL SPECIFICATIONS:

RATING: CABLE TYPE / SIZE: TEMPERATURE RATING: CONDUCTOR COLORS: CABLE JACKET COLOR: OVERALL LENGTH (L): CABLE OUTER DIAMETER: END 'A' PLUG: END 'B' : APPROVALS PLUG: APPROVALS CABLE: STANDARD:

10A / 250V AC SJT AWG,18x3C / H05VVF 3x1.0 mm² (DUAL MARKING) 70° C MIN. BROWN / BLUE / GREEN-YELLOW COOL GRAY, PANTONE 11C 2500 + 30 mm 7.6 + 0.2 mm IEC 320 / C13 (FEMALE) IEC 320 / C20 (MALE) UL, CSA or cUL; VDE or EN/EC MINIMUM UL, CSA or cUL; VDE or EN/EC MINIMUM APPROVALS CONNECTOR: UL, CSA or cUL; VDE or EN/EC MINIMUM COMPLIES WITH UL62, EDITION 17

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

<u> </u>										
	AND	DASH NO.	PART NO	REV.		DESCRIPTION	NOTES			
$ \begin{array}{c} \text{AND} \\ \text{OR} \\ \text{OR} \\ \text{OE} \end{array} $			TABULATION BLOCK							
				TOLER DECIMALS .xx +/- 0.1 .xxx +/005	+/- 1*	GlobTek, Inc. www.globtek.com 186 Veterans Dr. No Tel. 201-784-1000				
Foot Note: Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair are subject to change without prior noticeLimitation of Use: Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.		DATE: 12/21/12	MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1* .xxx +/013		DWG TITLE: INTERNATIONAL DETACHABLE CORDSET, 3 FEET, JUMPER C20 TO C13					
	DRAWN: NF	DATE: 12/21/12	FSCN No.: G, CC	SIZE A		REV. A				
	APRVD: HM	DATE: 12/21/12	SCALE: NONE		PART NO: 70335002M5701-GY(R)	SHEET 1/1				