


PANDUIT P/N	WEIGHT
ACB04	0.1kg

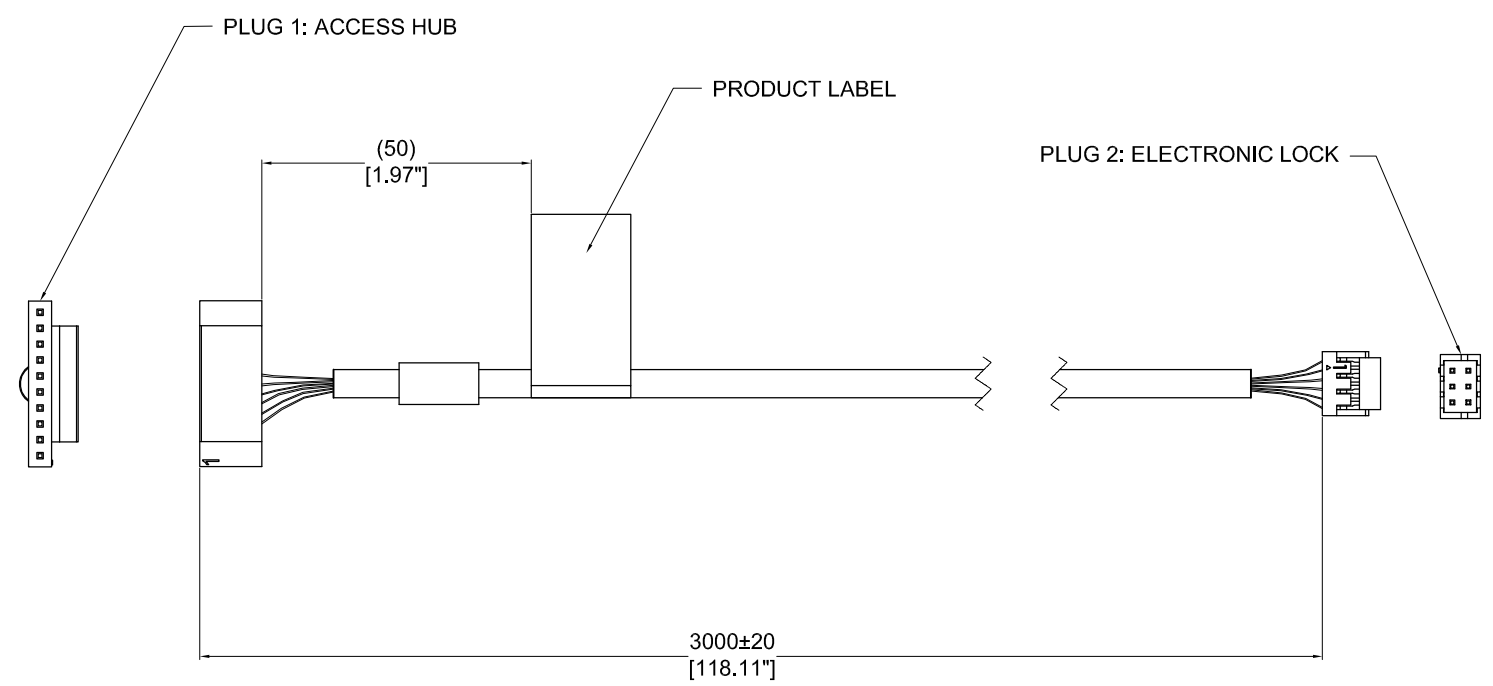

**SPECIFICATION:**

1. STANDARD  
 OPERATING TEMPERATURE RANGE: 0°C TO 65°C [32°F TO 149°F]  
 OPERATIONAL VOLTAGE: 5 ±0.1 VOLTS  
 CURRENT DRAW: 30 mA MAX  
 INTERFACE PLUG 1 (ACCESS HUB): H.R A2006 SERIES  
 2.0mm PITCH SINGLE ROW CONNECTOR  
 10 CIRCUITS  
 INTERFACE PLUG 1 HOUSING MATERIAL: NYLON  
 INTERFACE PLUG 1 HOUSING COLOR: WHITE  
 INTERFACE PLUG 2 (ELECTONIC LOCK): HIROSE DF11 SERIES  
 2.0mm PITCH DOUBLE ROW CONNECTOR  
 CRIMPING SOCKER, 6 CIRCUITS  
 INTERFACE PLUG 2 HOUSING MATERIAL: NYLON  
 INTERFACE PLUG 2 HOUSING COLOR: BLACK

2. ADDITIONAL:  
 NONE

3. ACCESSORY COMPONENTS:  
 INSTALLATION GUIDE, QTY:(1)

**NOTES:**

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN INCHES  
 2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES  
 3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART

**IDENTIFICATION**

PART NUMBER	DESCRIPTION
ACB04	HARNESS FOR ACE01 - COLD AISLE

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	01/04/2018	Felix	MM	DJB	INITIAL RELEASE	ACB04

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL, PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

**SIGN**  
 DATE  
 PRINT

TITLE:  
 SMARTZONE G5  
 HARNESS FOR ACE01 – COLD AISLE  
 CUSTOMER DRAWING

ITEM REVISION NAME:  
 DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]  
 Wire Harness Tolerance(mm)

THIRD ANGLE PROJECTION

0<L<500 ±10  
 500<L<2000 ±20  
 2000<L<6000 ±50

MATERIAL/COLOR:  
 N/A

DRAWING NUMBER:  
 ACB04\_DC

DRAWN BY: Felix DATE: 01/04/2018 CHK: MM SCALE: NONE

SHT 1 OF 1 SCALE: B