
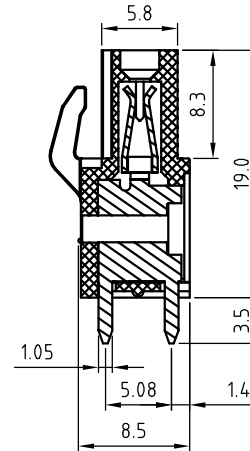
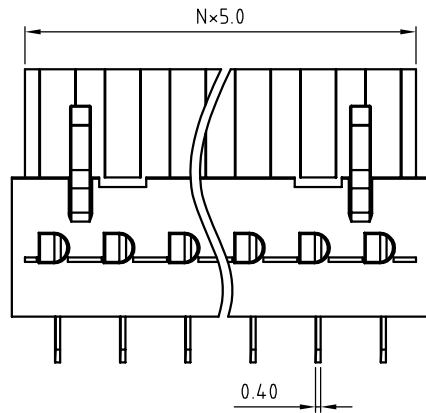


SIGN	DATE	DESCRIPTION	APPROVER
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			

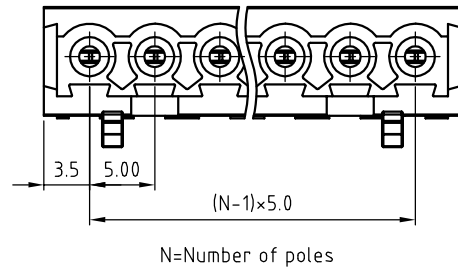

**Material**

- Wire guard: PhBz(CuSn)
- Surface of solder fail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

**Electrical**

- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6kv
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C ± 10°C / 5 Sec


RoHS Compliant

PART NUMBER:

**OSTV7XX7150**

No. of Poles	COLOR
02 2 Pole	0: Black
03 3 Pole	5: Green (Standard)
... ..	6: Blue
24 24 Pole	8: Light Grey

**P.C.B LAYOUT**

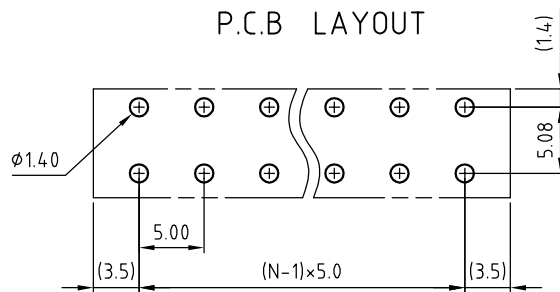

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTV7 5.0mm Series 180° Vertical 2P-24P				
PART NO.		OSTV7XX7150		DWG NO.		OSTV7XX7151.DWG
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
Shi Jun 2006.11.10	Shi Jun 2006.11.10	Tason 2006.03.04	Tason 2006.03.04		UNIT: mm	X. ±0.5
					SCALE: NONE	X.X ±0.3
					SHEET: 01/01	REV.: B
						X° ±1°