

REV. 0
DCO 170598


COIL: @ 25°C
 RESISTANCE _____ 552 OHMS MAX.
 NOMINAL VOLTAGE _____ 24.0 VDC
 MUST OPERATE _____ 11.1 VDC

 MUST RELEASE _____ 7.0 VDC MAX, 1.2 VDC MIN.

ENVIRONMENT:
 VIBRATION _____ 10 _____ CPS TO _____ 2000 _____ CPS @ _____ 20 _____ g's
 SHOCK _____ 50 _____ g's _____ 11 _____ MS. DURATION
 TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C

NOTES: OPERATE 6 MS MAX.
 RELEASE 5 MS MAX. BOUNCE 2.5 MS

CUSTOMER DATA SHEET

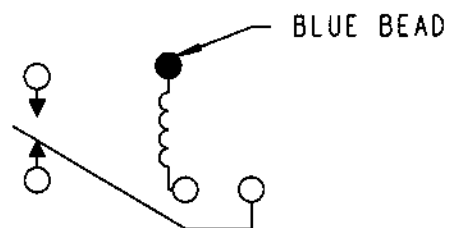

TERMINAL VIEW

CONTACT RATING: 2 AMPS 28 VDC,
 1 AMP 115 VAC (CASE NOT GROUNDED)

DR. ASB 11/27/01 CK. TLG 11-27-01

CII Technologies
 advanced control electronic solutions

CUST. _____ G.E.
 CUST. NO. 352791G20189 REV. _____

3SAE RELAY

3SAE2440A2