

MAG-MATE

TE Internal #: 62935-3 Magnet Wire Terminals, Poke-In, Size 2, 24 – 22 AWG Aluminum Wire, .51 – .64 mm Aluminum Wire, Lead Wire Size 20 – 18 AWG, MAG-MATE

View on TE.com >

Terminals & Splices > Magnet Wire Terminals



Magnet Wire Terminal Type: Poke-In Compatible With Cavity Size: Size 2 Aluminum Wire Size: .51 – .64 mm Lead Wire Size: 20 – 18 AWG

Features

East 11



| Product Type Features | |
|------------------------------------|-------------------------------|
| Compatible With Discrete Wire Type | Magnet Wire, Solid |
| Body Features | |
| Compatible With Cavity Size | Size 2 |
| Contact Features | |
| Magnet Wire Terminal Type | Poke-In |
| Terminal Plating Material | Tin |
| Terminal Orientation | Twisted |
| Termination Features | |
| Termination Method to Wire & Cable | Insulation Displacement (IDC) |
| Mechanical Attachment | |
| Mating Retention Type | Locking |
| Dimensions | |
| Terminal Height | 7.62 mm[.3 in] |
| Aluminum Wire Size | .51 – .64 mm |

62935-3

Magnet Wire Terminals, Poke-In, Size 2, 24 – 22 AWG Aluminum Wire, .51 – .64 mm Aluminum Wire, Lead Wire Size 20 – 18 AWG, MAG-MATE



| Lead Wire Size | .5 – .9 mm² |
|------------------------------------|---|
| Magnet Wire Size | .36 – .57 mm |
| Stock Thickness (Magnet Wire Side) | .41 mm[.016 in] |
| Product Length | 7.87 mm[.31 in] |
| Usage Conditions | |
| Insulation Option | Uninsulated |
| Operating Temperature Range | -65 – 105 °C[-85 – 221 °F] |
| Operation/Application | |
| Compatible With Wire Base Material | Aluminum, Copper |
| Identification Marking | |
| Identification Number | 10 |
| Packaging Features | |
| Packaging Quantity | 12000 |
| Packaging Method | Reel |
| Other | |
| Terminals & Splices Comment | Solid or overcoated stranded lead wire only., Two magnet wires may be terminated in the same terminal slot if |

diameters are equal.

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant |
|---|--|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |
| Product Compliance Disclaimer | |


62935-3

Magnet Wire Terminals, Poke-In, Size 2, 24 – 22 AWG Aluminum Wire, .51 – .64 mm Aluminum Wire, Lead Wire Size 20 – 18 AWG, MAG-MATE



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

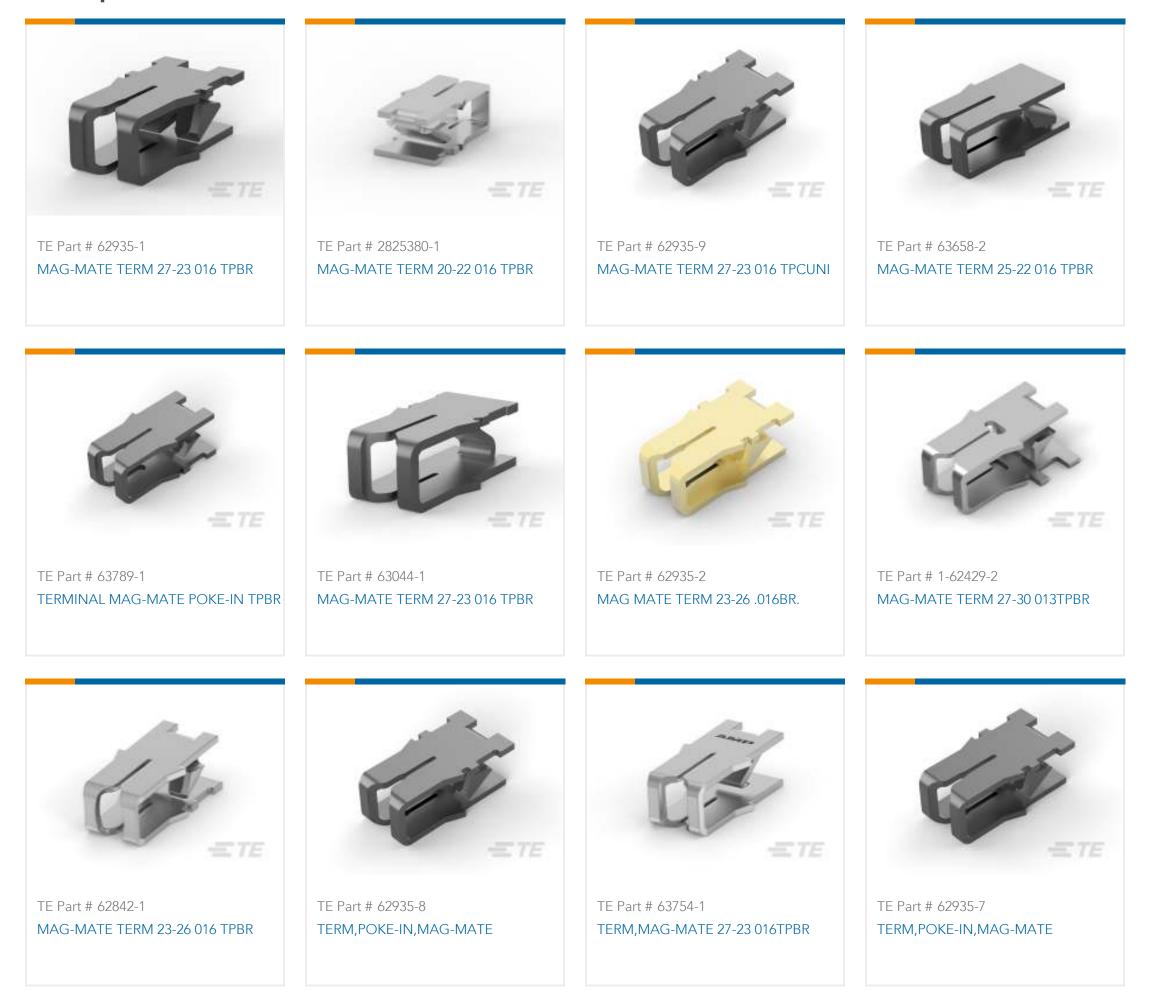

Also in the Series | MAG-MATE

Magnet Wire Terminals, Poke-In, Size 2, 24 – 22 AWG Aluminum Wire, .51 – .64 mm Aluminum Wire, Lead Wire Size 20 – 18 AWG, MAG-MATE





Customers Also Bought



Documents

Product Drawings MAG-MATE TERM 27-23 016TPBR

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_62935-3_BY.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_62935-3_BY.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_62935-3_BY.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Magnet Wire Terminals & Splices

English

Product Specifications Application Specification

English

62935-3

Magnet Wire Terminals, Poke-In, Size 2, 24 – 22 AWG Aluminum Wire, .51 – .64 mm Aluminum Wire, Lead Wire Size 20 – 18 AWG, MAG-MATE



Product Environmental Compliance TE Material Declaration

English