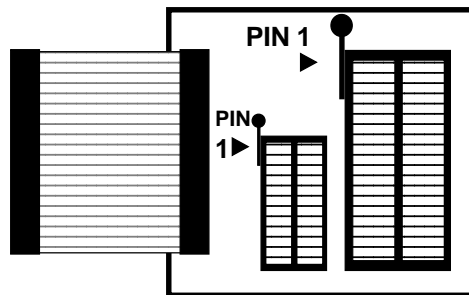

QuickWriter™ Programming Adapter Information

This adapter accepts 18 pin DIP packages that are 300 mil wide and 28 pin DIP packages that are 300 and 600 mil wide.



NOTE: Align PIN 1 of all devices with the arrows indicated.

NOTE: The 28 pin socket on this adapter does not support Microcontrollers that require serial programming (such as the PIC16F876). The 18 pin socket of this adapter supports Serial and Parallel programmed devices. See the “MCU Information” section of the QuickWriter Software to determine the programming mode of the selected device.