

■ **Features**

- Single output to 45-48W
- 100-240Vac Universal input
- Certificates: UL, CE
- Safety standard: IEC60950, IEC60601, IEC61558, IEC60335
- Frequency: 50-60Hz
- Ripple: 120mV
- OVP, OCP, SCP, and Overload protection
- Efficiency level: VI
- Available Plug types: US, EU, AU, UK plug
- Dimension: 76x50x32.5mm (exclude plug)



\*Product images are for illustrative purposes only and may vary from actual design.

■ **Application**


- Consumer electronics, Telecom and office equipment
- Industrial equipment


■ **Model List**

**Custom Designs Available!**

| Model           | Output Voltage | Output Current | Power | Certifications |
|-----------------|----------------|----------------|-------|----------------|
| WM048S-090-X-XX | 9V             | 5A             | 45W   | UL, CE         |
| WM048S-120-X-XX | 12V            | 4A             | 48W   | UL, CE         |
| WM048S-150-X-XX | 15V            | 3.2A           | 48W   | UL, CE         |
| WM048S-180-X-XX | 18V            | 2.66A          | 48W   | UL, CE         |
| WM048S-240-X-XX | 24V            | 2A             | 48W   | UL, CE         |

■ **Mechanical Diagram**

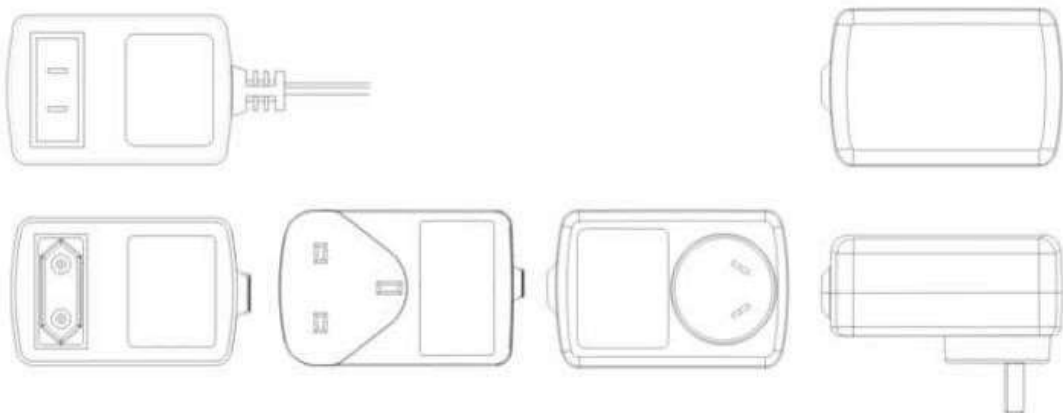

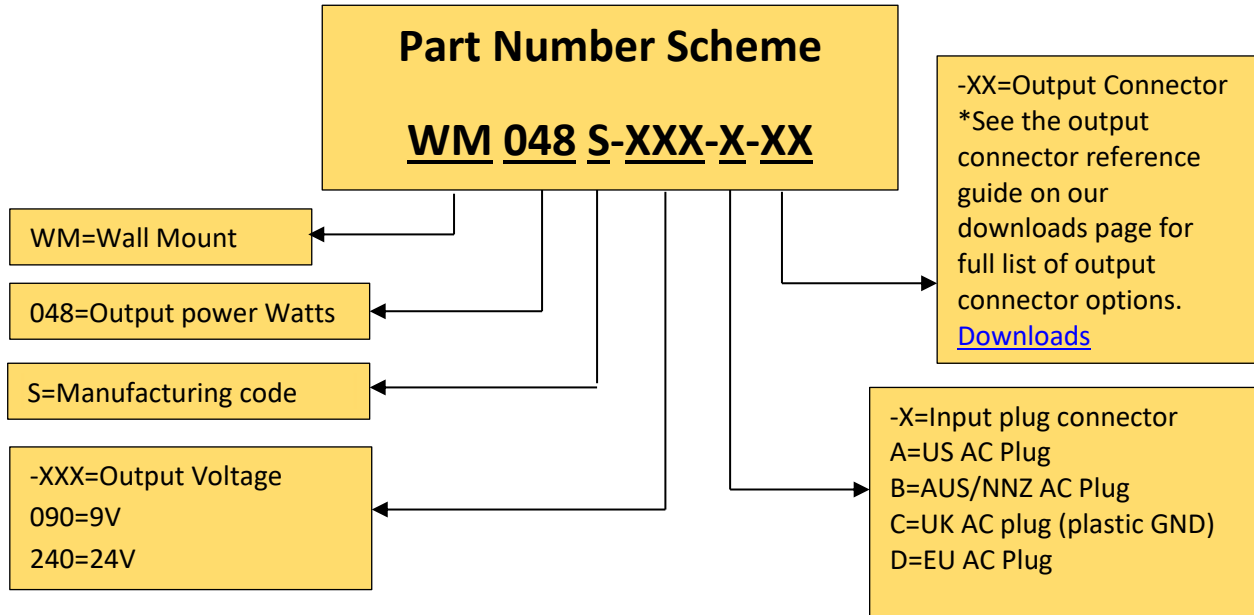

**\*Product images are for illustrative purposes only and may vary from actual design.**

**\*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**