
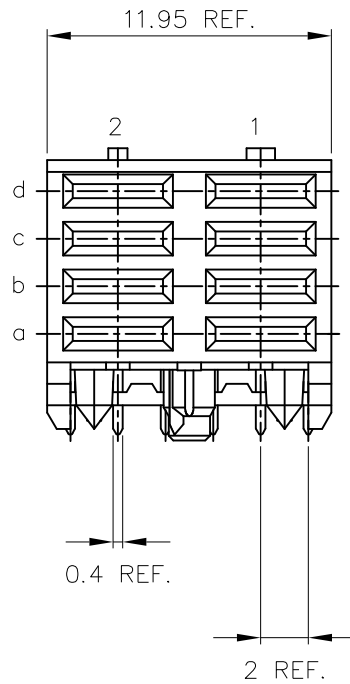


PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL	
-1YY	TELCORDIA CO	OBSOLETE
-2YY	CUSTOMER SPECIAL	OBSOLETE
-3YY	CUSTOMER SPECIAL	OBSOLETE
-9YY	TELCORDIA CO	OBSOLETE
-2YYLF	CUSTOMER SPECIAL	OBSOLETE
-9YYLF	TELCORDIA CO	OBSOLETE
-1YYLF	TELCORDIA CO	OBSOLETE
-3YYLF	CUSTOMER SPECIAL	OBSOLETE




PC BOARD VERSIONS

PRODUCTNR:	PCB THICKNESS	DIM "A"
89039-X01LF	1.6	2.90
89039-X11LF	2.4	3.53

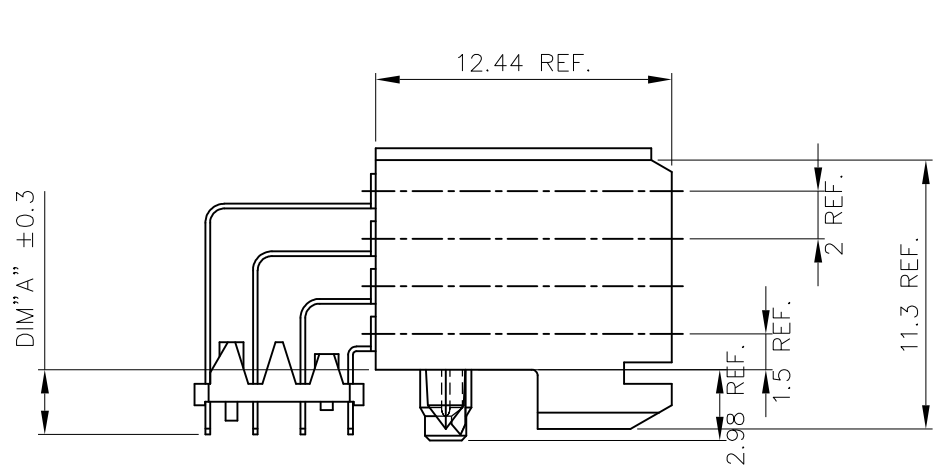

PRODUCT AFTER PC BOARD APPLICATION.

PC BOARD THICKNESS ±0.20
SEE TABLE

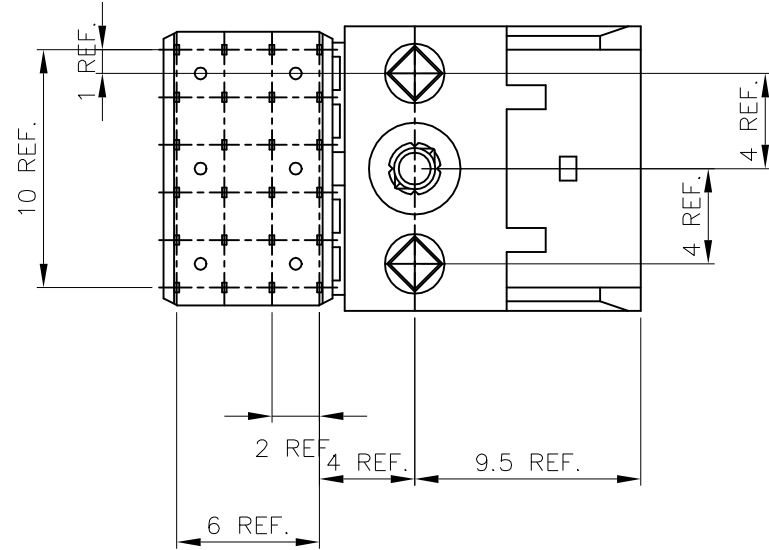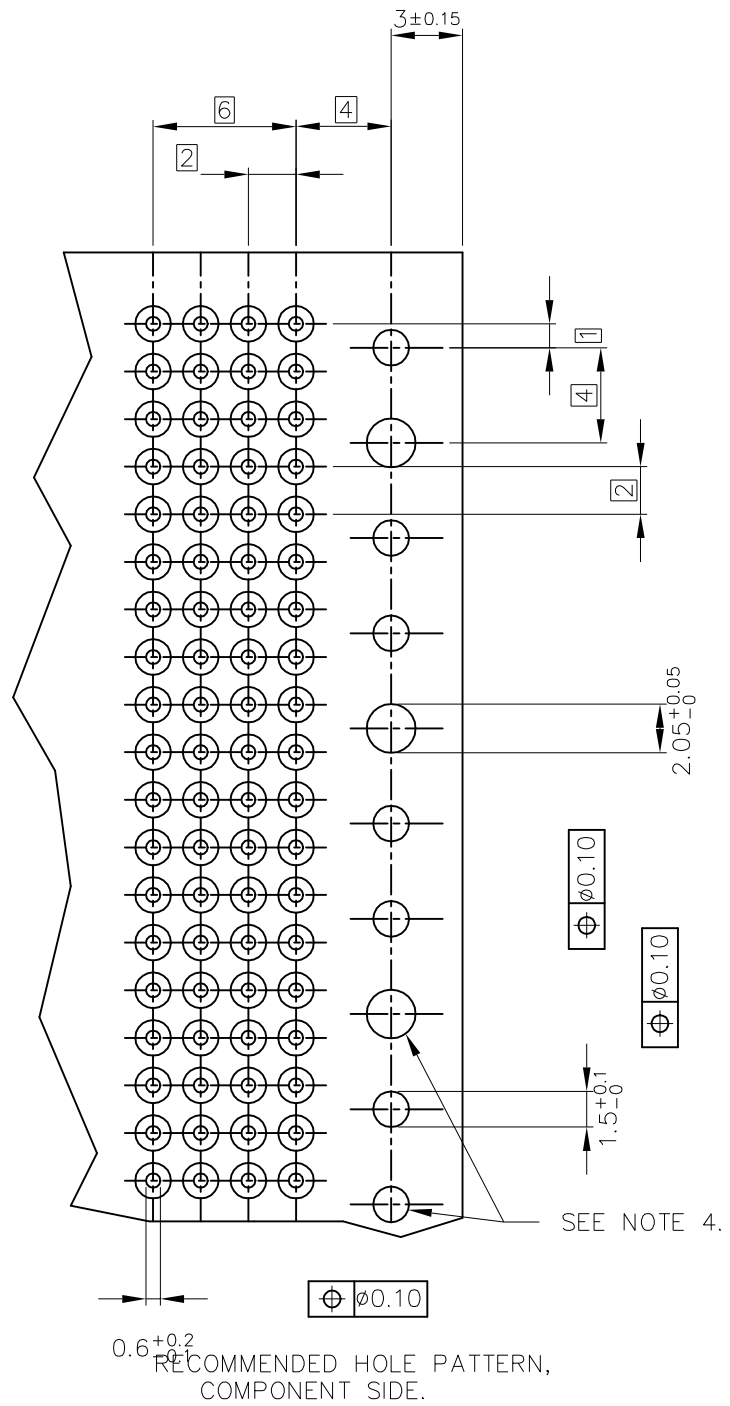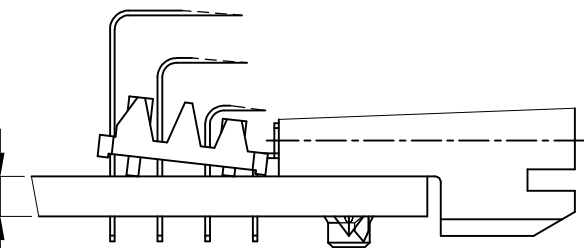

NOTES:

- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
- 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 INDICATED HOLES ARE UNPLATED.
- 4 PRODUCTMARKING: PARTNUMBER & BATCH ID.
- 5 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 6 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 7 THE PRODUCT SPECIFICATION GS-12-453.
- 8 FOR THE PRODUCT WITH 30u" GOLD PLATING IN TERMINAL, THEY CAN BE REPLACED BY 30 GXT PLATING.

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection MM		product family METRAL	
litr				ecn no		dr		date		title	
K				DG08-0171		TER		2008-08-26		RA FEMALE POWER RECEPTACLE 12mm PRESS PEG	
L				N11-0131		A.ZH		2011-05-09		scale 5:1	
M				ELX-N-004585		A.ZH		2011-07-20		sheet 1 of 2	
N				ELX-N-006420		A.ZH		2011-09-29		size A3	
P				ELX-N-26608		MZ		2017-03-27		type Product Customer Drawing	
sheet index				revision sheet		P 1		P 2		Amphenol FCI	

