


Item		Specification
No. of conductors	導體芯 N	20P
Pitch	間距 P	0.5±0.05
Total Pitch	總間距 PT	9.5±0.05
Total Length	總長度 L	30±1
Insulation Length	絕緣長度 IL	23±1
Margin Width	邊緣寬度 M	0.5±0.05
Total Width	總寬度 W	10.5±0.05
Strip Length	線口長度 S1	3.5±0.5
Strip Length	線口長度 S2	3.5±0.5
Reinforeing tape length	補強板長度 B1	6±1
Reinforeing tape length	補強板長度 B2	6±1
Slanting	線口傾斜度 A	≤0.3
Over lap	衝孔	/
Terminal thickness	插入厚度 T1/T2	0.32/0.32±0.03
Thickness insulation	線身厚度 T	0.155±0.02
Conductor thickness	導體厚度 Ct	0.035±0.005
Conductor width	導體寬度 Cw	0.3±0.03
Supporting Tape Color	補強板顏色	Blue
PET(Supporting Tape)	補強板規格	0.225
PET(Insulation)	絕緣膠規格	0.06 (Printing)
PET(Insulation)	絕緣膠規格	0.06 (White)
Storage Temperature Range	存儲溫度/濕度	10°C~35°C/30~65RH%

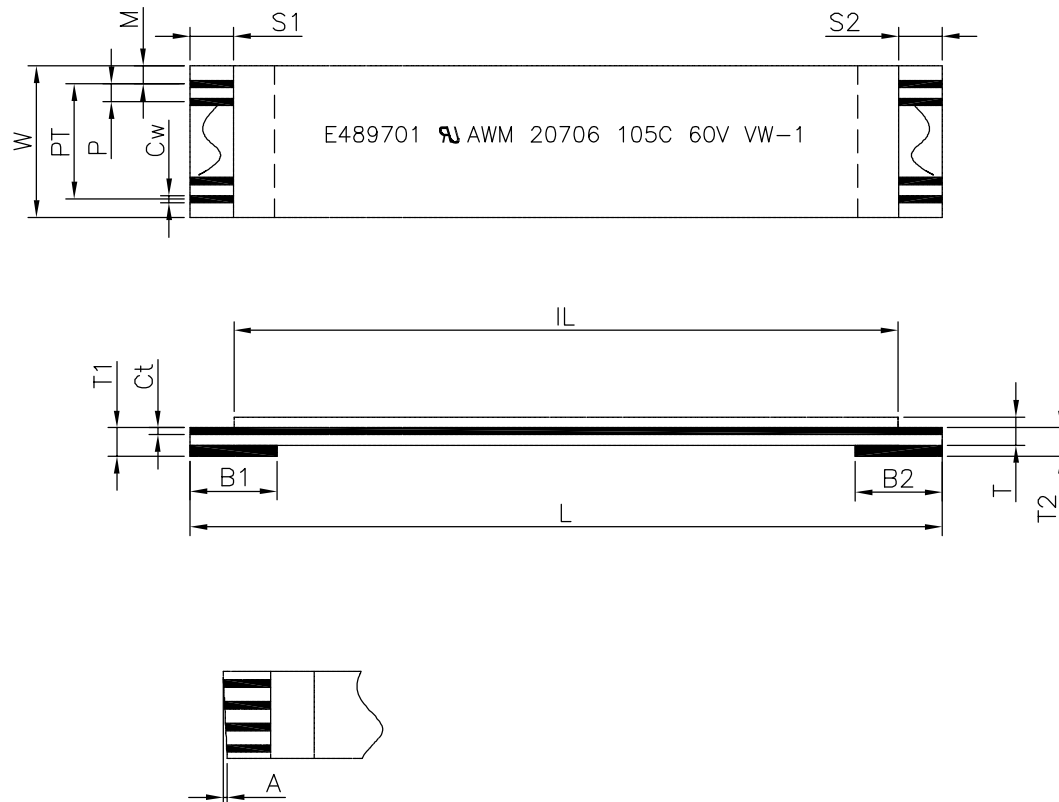

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	<h2 style="color: red; margin: 0;">CnC Tech</h2> <p style="margin: 0;">Industrial Cable and Connector Technology</p>	
				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE
B					SCALE:1:1	FFC CABLE 0.5*20P*30	A4
A	28-Sep-2021			APPROVAL:	SHEET: 1 / 1	PART NO:	
REV	DATE	FILE	BY		PROJECTION:	310-20-0030-A	