

IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL



2.0 x 1.6 x 0.50 mm

 RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE (See Note #1)

ABM11-140-26.000MHz

FEATURES

- Optimized for low power consumption, wearables, and IoT applications
- Guaranteed low 40Ω ESR ensures operation in power sensitive solutions
- 0.50mm max height ideally suited for height constrained designs
- Seam sealed for long-term reliability

APPLICATIONS

- Wearables
- Internet of Things (IoT)
- Bluetooth/Bluetooth Low Energy (BLE)
- Wireless modules
- Machine-to-machine (M2M) connectivity
- Ultra-low power MCU/modules
- WiFi

STANDARD SPECIFICATIONS

| PARAMETERS | MINIMUM | TYPICAL | MAXIMUM | UNITS | NOTES |
|--|-------------|---------|---------|-------|----------------|
| Frequency | 26.000 | | | MHz | |
| Operation Mode | Fundamental | | | | |
| Operating Temperature | -20 | | +70 | °C | |
| Storage Temperature | -40 | | +125 | °C | |
| Frequency Tolerance @+25°C | -10 | | +10 | ppm | See Note#2 |
| Frequency Stability over the Operating Temperature (ref. to +25°C) | -10 | | +10 | ppm | See Note#3 |
| Equivalent series resistance (R1) | | | 40 | Ω | |
| Shunt capacitance (C0) | | | 2 | pF | |
| Load capacitance (CL) | 8 | | | pF | |
| Drive Level | | 10 | 100 | μW | |
| Aging@25°C±3°C | | | ±3 | ppm | First year |
| Insulation Resistance | 500 | | | MΩ | @ 100Vdc ± 15V |

Note#1: Moisture Sensitivity Level (MSL) – This product is Hermetically Sealed and not Moisture Sensitive

Note#2: Referenced to crystal resonant frequency, into an oscillator loop effective load of 8pF

Note#3: Referenced to the measured frequency at 25°C±3°C, into an oscillator loop effective load of 8pF

REVISED: 06/21/2016

IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL



2.0 x 1.6 x 0.50 mm

RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE (See Note #1)


ABM11-140-26.000MHz

PART IDENTIFICATION AND ORDERING INFORMATION

ABM11-140-26.000MHz-


| PACKAGING |
|-------------|
| Blank: Bulk |
| T3: 3K/Reel |

MECHANICAL DIMENSIONS (ALL DIMENSIONS ARE IN mm)

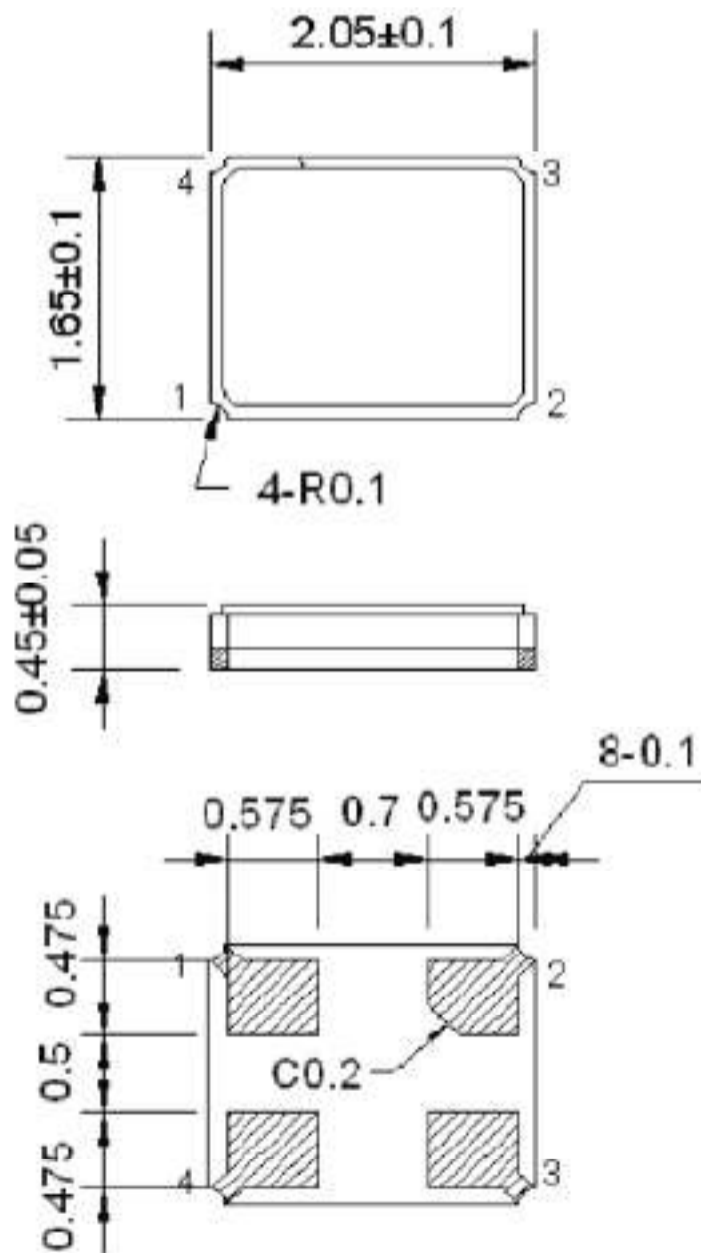

RECOMMENDED LAND PATTERN

<Top View>

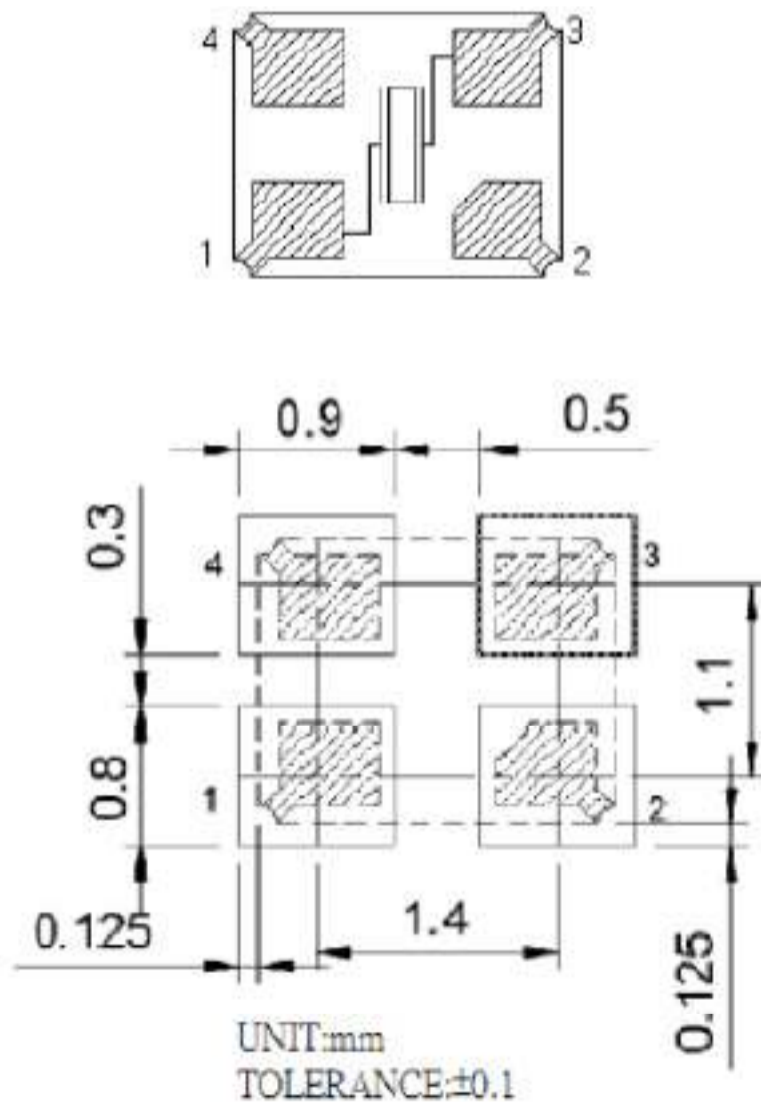

REVISED: 06/21/2016

IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL




2.0 x 1.6 x 0.50 mm

Pb RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE (See Note #1)

ABM11-140-26.000MHz


REFLOW PROFILE

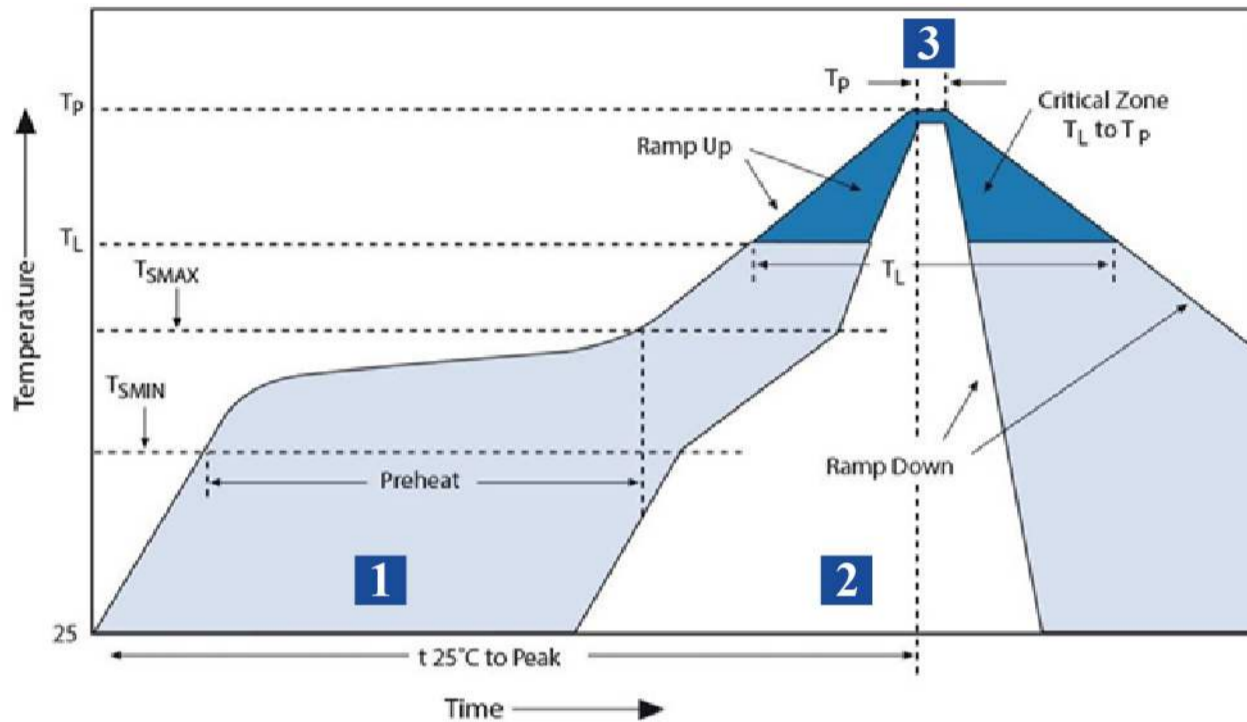

| Zone | Description | Temperature | Time |
|------|-------------|--|-------------|
| 1 | Preheat | T _{SMIN} - T _{SMAX} 160°C~180°C | 120 sec. |
| 2 | Reflow | T _L 60°C | 60 sec. |
| 3 | Peak Heat | T _P 260°C | 10 sec. MAX |

PACKAGING

T3:3000PCS/REEL

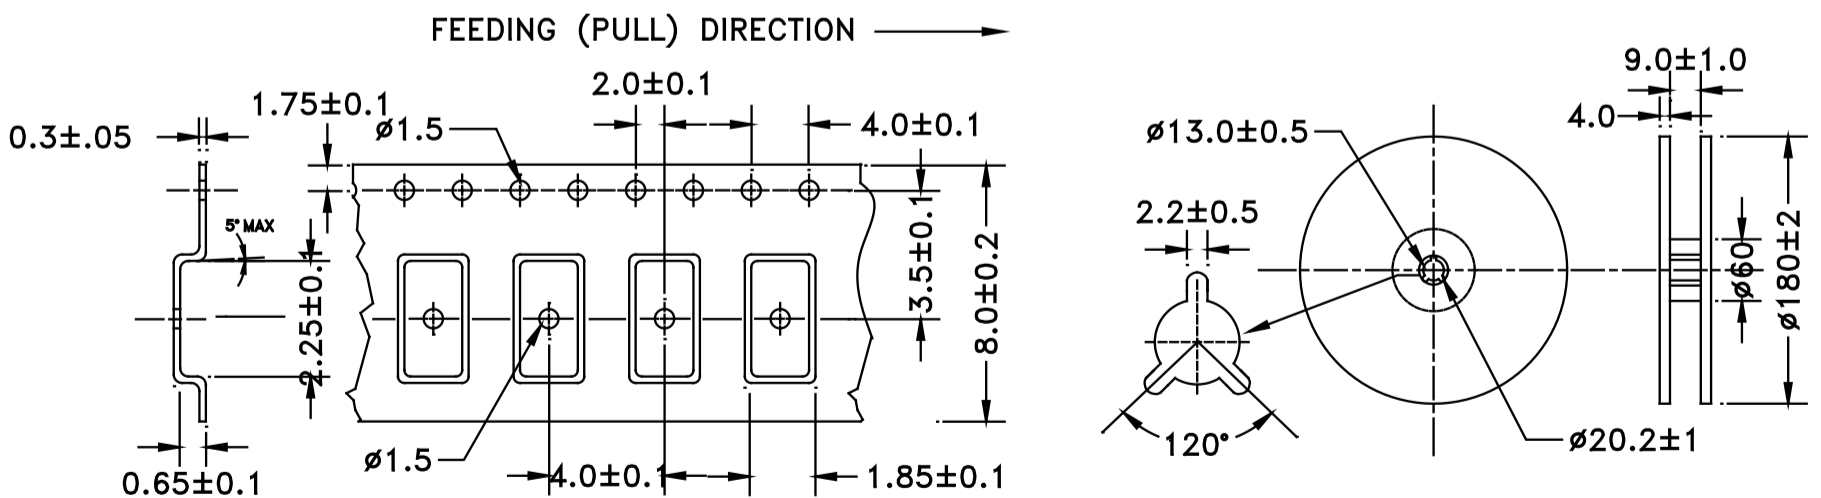

REVISED: 06/21/2016



5101 Hidden Creek Lane Spicewood TX 78669
 Phone: 512-371-6159 | Fax: 512-351-8858
 For terms and conditions of sale please visit:
www.abracon.com

ABRACON IS
 ISO9001-2008
 CERTIFIED