

“Stay Connected” with



Solar Power Components

a PennEngineering® Company



- Easy to use: Just twist on wire!
- Allows breakouts of single/multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables and hose, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .13” (3,2 mm) to 7.00” (177,8 mm) diameters.
- Conforms to: Fed Spec LP390, Mil I-631D, Mil P-21922B
- For hose and cable **clamps** see pages 7-36 through 7-43.




- Easy to use: Just twist on wire!
- Allows breakouts of single/multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .13” (3,2 mm) to 7.00” (177,8 mm) diameters.
- Available in UV black or natural nylon color.
- Conforms to: ASTM D 4066, Group 2; Fed Spec LP410A
- For hose and cable **clamps**, see pages 7-36 through 7-43.

Heyco® Hose and Cable Wrap-Polyethylene

Standard

BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS					
Minimum Diameter		Maximum Diameter		UV Black	Natural		A Outside Diameter		B Pitch		C Thickness	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	
.13	3,2	1.50	38,1	8904	8905	CW 187 PE*	.19	4,8	.25	6,3	.03	0,8
.19	4,8	2.00	50,8	8908	8909	CW 250 PE	.25	6,3	.38	9,5	.05	1,3
.31	7,9	3.00	76,2	8912	8913	CW 375 PE	.38	9,5	.44	11,1	.05	1,3
.38	9,5	4.00	101,6	8916	8917	CW 500 PE	.50	12,7	.50	12,7	.06	1,6
.50	12,7	4.50	114,3	8920	8921	CW 625 PE*	.63	15,9	.63	15,9	.06	1,6
		5.00	127,0	8924	8925	CW 750 PE	.75	19,1	.75	19,1	.07	1,7
1.00	25,4	7.00	177,8	8928	8929	CW 1000 PE	1.00	25,4	1.00	25,4	.08	2,0


Standard colors UV black or natural.
* Parts are not UR recognized.

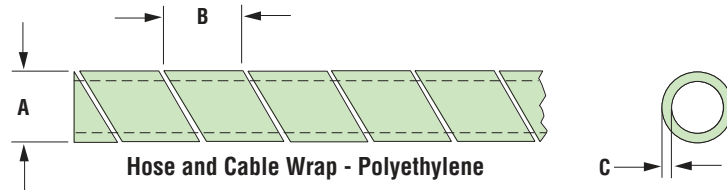

Heyco® SunWrap™ -Nylon

BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS					
Minimum Diameter		Maximum Diameter		UV Black	Natural		A Outside Diameter		B Pitch		C Thickness	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	
.13	3,2	1.50	38,1	8936	8937	CW 187 N*	.19	4,8	.25	6,3	.02	0,5
.19	4,8	2.00	50,8	8940	8941	CW 250 N	.25	6,3	.38	9,5	.03	0,6
.31	7,9	3.00	76,2	8944	8945	CW 375 N	.38	9,5	.44	11,1		
.38	9,5	4.00	101,6	8948	8949	CW 500 N	.50	12,7	.50	12,7	.04	0,9
.50	12,7	4.50	114,3	8952	8953	CW 625 N*	.63	15,9	.63	15,9		
		5.00	127,0	8956	8957	CW 750 N	.75	19,0	.75	19,1	.03	0,8
1.00	25,4	7.00	177,8	8960	8961	CW 1000 N	1.00	25,4	1.00	25,4		

Standard colors UV black or natural.
* Parts are not UL recognized.

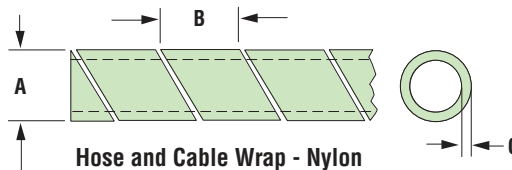

Material: Polyethylene
 Certifications: Recognized under the Component Program of Underwriters' Laboratories File E173954.
 Temperature Range: -76°F (-60°C) to 190°F (88°C)
 UL rated temp not to exceed 122°F (50°C)

Material: Nylon
 Certifications: Recognized under the Component Program of Underwriters' Laboratories File E173954
 Temperature Range: -40°F (-40°C) to 250°F (121°C)
 - UL rated temp not to exceed 149°F (65°C)