
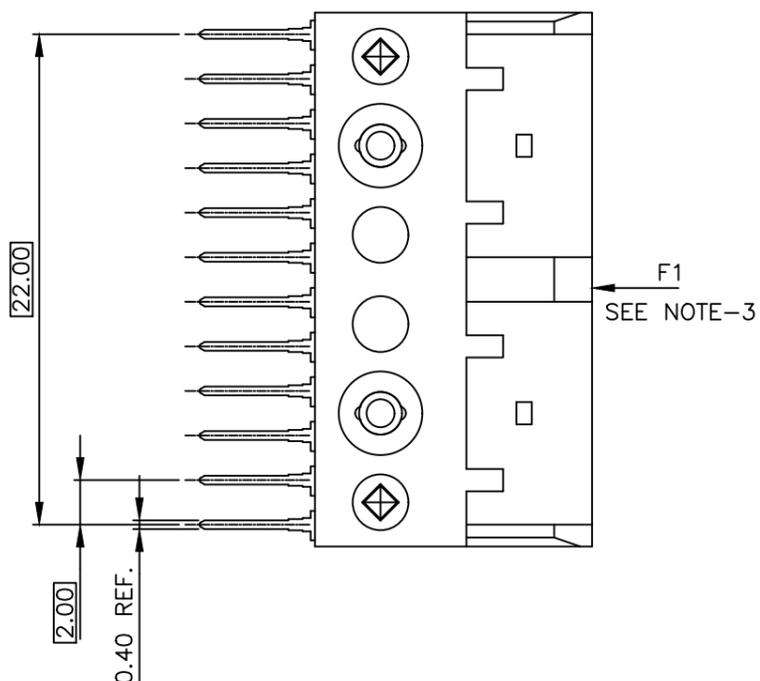
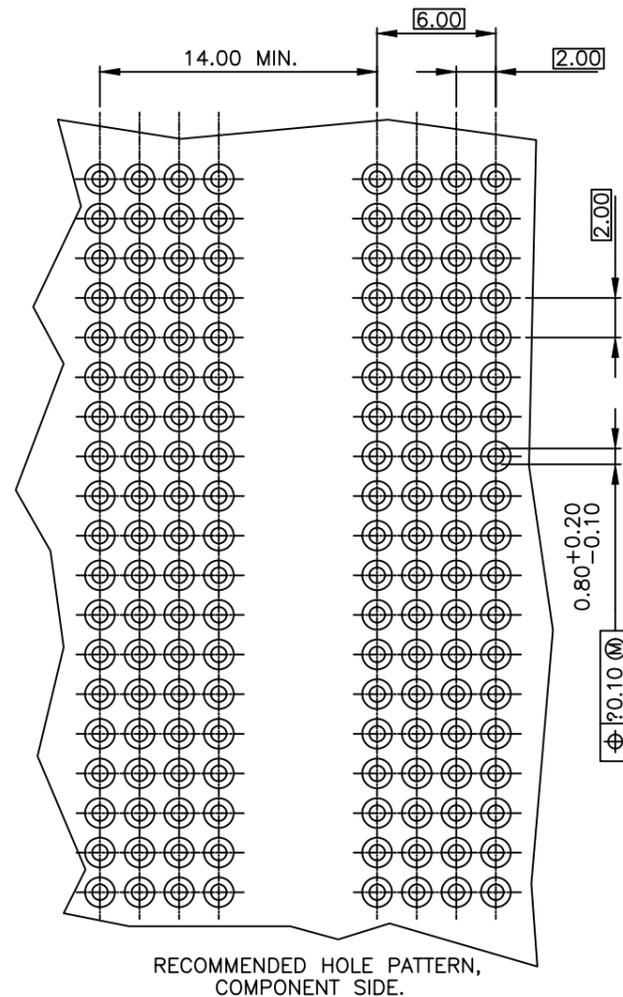


PRODUCT NR.	DIM "A"
88961-X01LF	5.00 REF.
88961-X11LF	3.35 REF.
88961-X20LF	5.76 REF.

REFER NOTE-2
88961-XYLFF

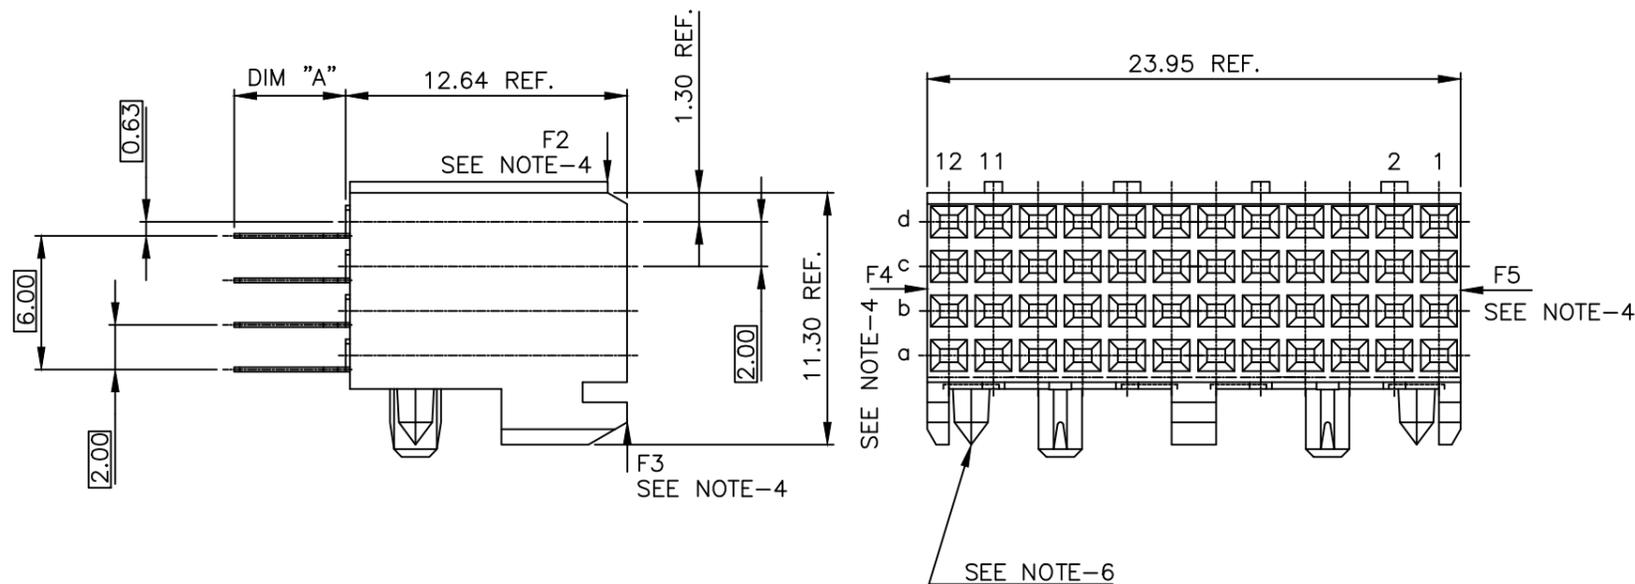

NOTES:

- MATERIAL : BODY : LCP UL94-V0
: CONTACT : COPPER ALLOY.
- FOR PLATING PERFORMANCE REFER DRAWING # 10159408 Δ
- LOAD IN THIS DIRECTION (E.G. THROUGH CODING) 30 NEWTON MAXIMUM PER 12 MM. CONNECTOR LENGTH.
- LOAD IN THIS DIRECTION 25 NEWTON MAXIMUM PER CONNECTOR.
- TO ENSURE PROPER ALIGNMENT OF MULTIPLE MODULES ON A BOARD, THE USE OF A FIXTURE IS RECOMMENDED.
- DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47- 0004.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- A Δ SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

mat'l. code				surface <input checked="" type="checkbox"/> ISO 1302	tolerance <input checked="" type="checkbox"/> ISO 406	projection <input checked="" type="checkbox"/> ISO 1101	product family	METRAL			
ltr	ecn no	dr	date	tolerances unless otherwise specified			title				
J	DG08-0171	TER	2006-08-26	angles linear	.X±0.3	mm	STR FEMALE STB				
K	DG09-0068	CENH	2009-06-06		.XX±0.13		SIGNAL 24MM				
L	ELX-I-38919	MINI	2020-10-23		.XXX±0.050		scale	-			
				dr	H. BOUWKNEGT	1993-02-19	dwg no		sheet 1 of 1	size	
				enrg	ARUN	2020-10-23	88961		A3		
				chr	ALEX BABU	2020-10-23	type		Product Customer Drawing		
				appd	SANOJ	2020-10-23					
sheet index	revision sheet	L	1								