



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
6/14/13	D	UPDATED TITLE		B.S.	T.B.
6/02/17	E	DIM. 2.05 WAS 2.00 DIM. 2.99 WAS 3.00 DIM. 1.0 WAS 1.5		B.S.	T.B.
7/07/17	F	ADDED MOUNTING INSTRUCTION		B.S.	T.B.

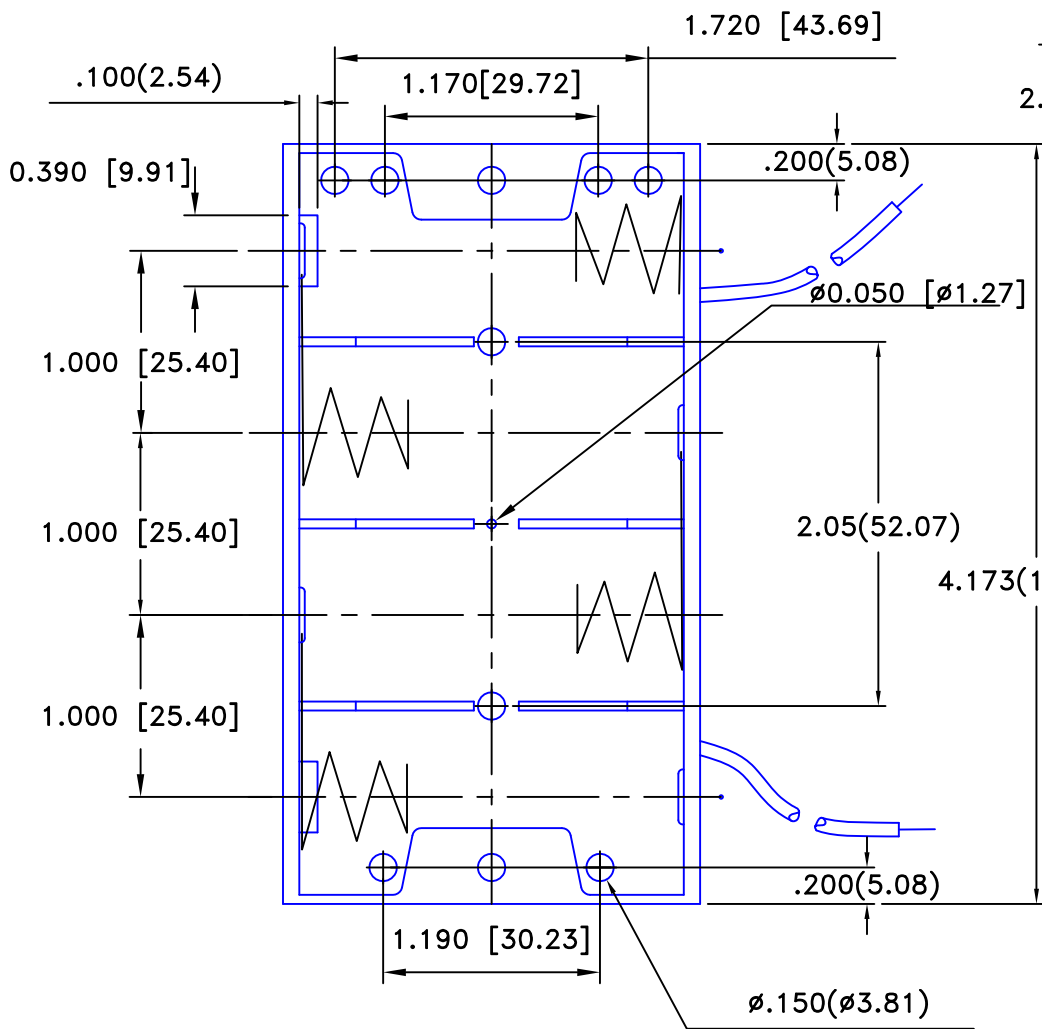


Wire Leads Shown

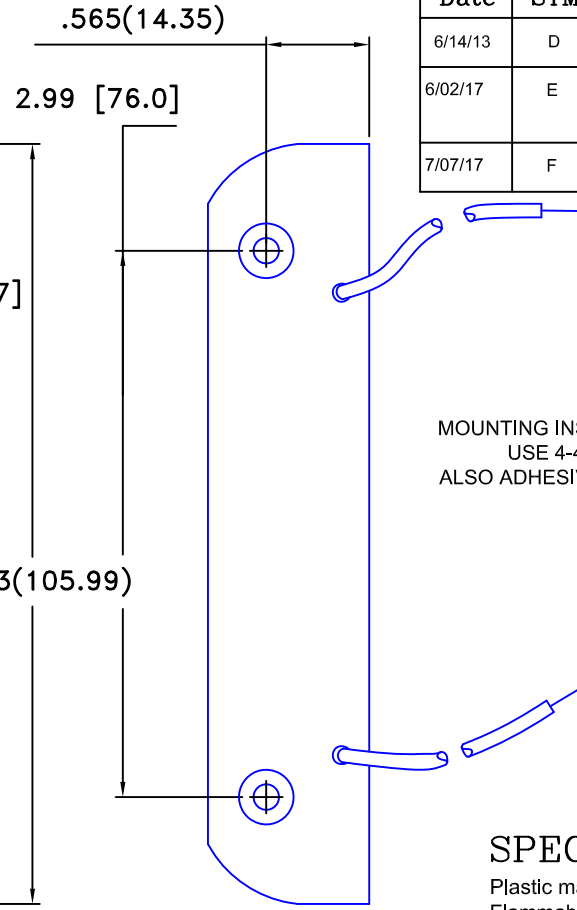


MOUNTING INSTRUCTION:
USE 4-40 MACHINE SCREWS.
ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

SPECIFICATIONS

Plastic material - Polypropylene
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs - Nickel Plated Spring Steel
 Wire - 26 AWG, UL1007, CSA, TR64, 300V, 80°C
 Rivets - Brass, Nickel Plated
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000
 ROHS 2 COMPLIANT

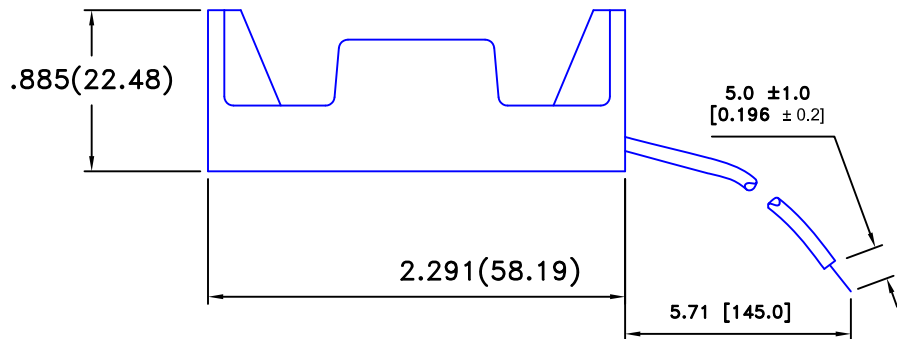

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)	Scale XX	Drawn By T.S.	
Fractional ± .8 (.030)	Title FOUR "C" CELL HOLDER WITH WIRE LEADS		
Angular ± 3°	Date 07/07/17	Drawing Number BH4CW	
		Approved By T.B.	