


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: X100WCOLOR  
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
CONTACT BLADE: GOLD PLATED BeCu.  
SPRING: STAINLESS STEEL.
- P/N: 9202COLOR  
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
FRAME: NICKEL PLATED BRASS.  
CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
- P/N: W-200/COLOR  
22AWG TINNED COPPER  
0.070 [1.78] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.
- PERFORMANCE  
MAXIMUM CURRENT: 2.5 AMPS  
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC  
HANDS FREE: 1000 W.V.D.C.  
MAXIMUM TEMPERATURE: 200°F (93°C)

LTR	REVISIONS		DATE	APPROVED
	DESCRIPTION			

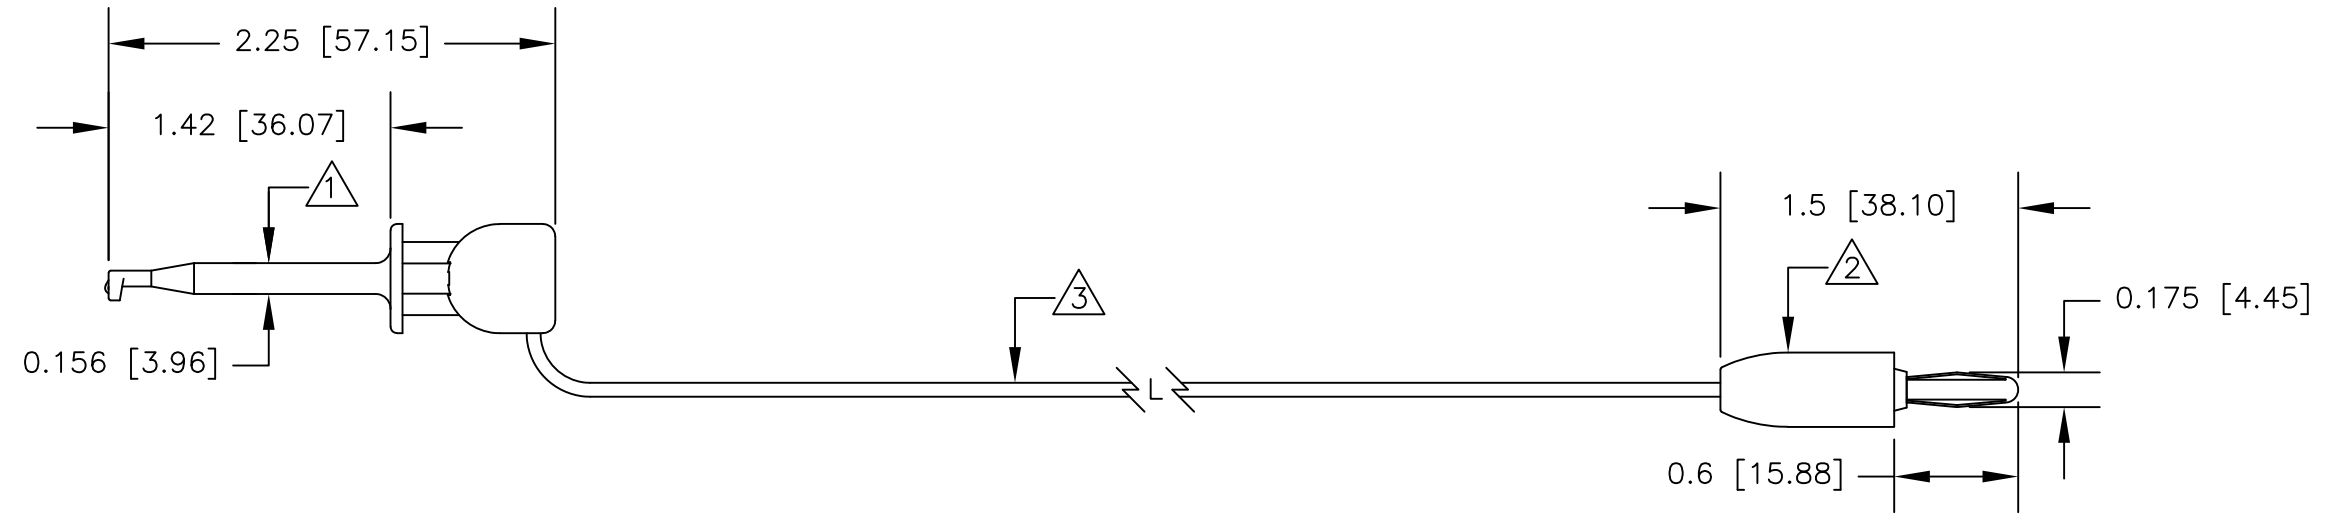

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L.	4/19	
			APPROVED BY			
		FINISH SEE NOTE.			DESCRIPTION	
NEXT ASSY	USED ON				X100W MINIHOOK TO 9202 STD BAN PLUG	
APPLICATION		DO NOT SCALE DRAWING	SIZE	CODE IDENT NO.	DRAWING NO.	REV.
			B	08505	BX1W	
			SCALE	1:1	SHEET 1 OF 1	