

# TPC 292411T



Sample image

**Order symbol:** TPC 292411T

**Product nbr:** 5824008

**Description:** Enclosure. PC


**Remarks:** Clear transparent cover

**EAN:** 6418074086839


**Including:**

**El. number:**

- Finland:
- Denmark:
- Sweden:

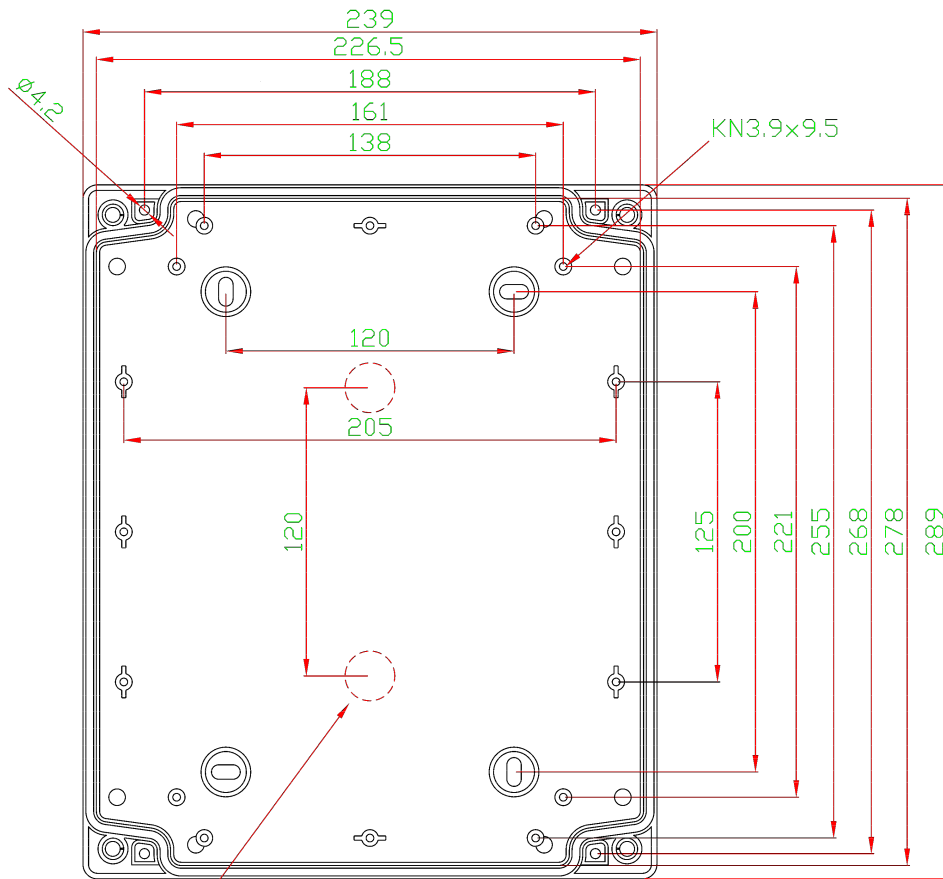

2xM20 knock out

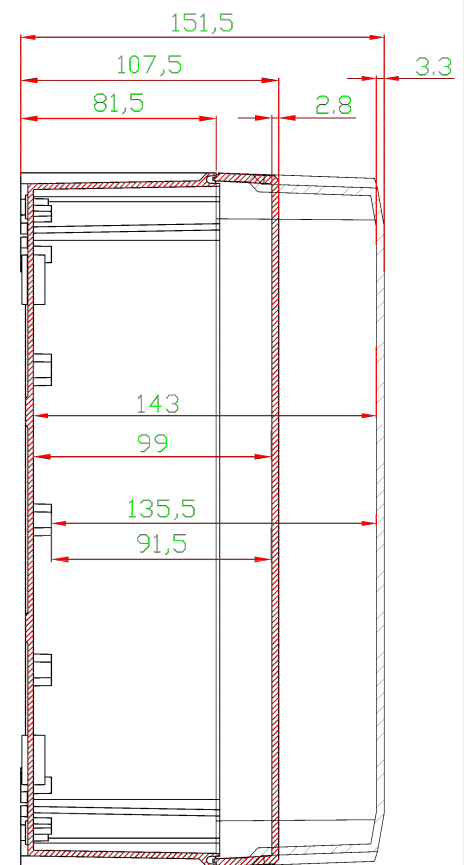

**Dimensions:**

	<b>Height</b>	<b>Width</b>	<b>Depth</b>
mm:	289	239	107
inch:	11.38	9.41	4.21

**Materials:**

Material: Polycarbonate

Base colour:

Cover colour:

Gasket material:

**Temperatures:**

Temperature °C (short term):: -40 ... 120

Temperature °C (continuous):

Temperature °F (short term): -40 ... 250

Temperature °F (continuous): -40 ... 175

**Accessories:**

MP 2924	Mounting plate. for enclosures: (265 x 215 x 0)
DR 215	DIN-35 Mounting rail. for enclosures: (215 x 35 x 1)
DR 265	DIN-35 Mounting rail. for enclosures: (265 x 35 x 1)
FP 10674	Mounting foot kit (2 pcs) incl. screws

**Rating:**

Ingress protection (EN 60529):	IP65;
Impact Resistance (EN 62262):	IK07; IK08;
Electrical insulation:	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance:	-
Flammability Rating:	UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C:	960 °C
NEMA Class	

**Certificates:**

Certificate FI 40343