

EMG 30-NZG/G24/SI

Order No.: 2943932




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2943932>

Voltage regulator module with fixed-voltage regulator, input 24 V-29 V AC/ 28 V-38 V DC, output 24 V DC/0.5 A



Commercial data

GTIN (EAN)	 4 017918 081409
sales group	H043
Pack	1 pcs.
Customs tariff	85044082

Product notes

WEEE/RoHS-compliant since:
04/02/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Input data

Nominal input voltage	27 V AC 5%
AC frequency range	60 Hz ... 50 Hz

Nominal power consumption	Approx. 20 VA
Input fuse	0.63 A (normal-blow (5 x 20))

Output data

Nominal output voltage	24 V DC $\pm 4\%$
Output current	0.5 A
Residual ripple	$\leq 60 \text{ mV}_{\text{PP}}$
Type of protection	Thermo-electronic disconnect
Protective circuit/component	Varistor

General data

Width	32 mm
Height	67.1 mm
Depth	75 mm
Net weight	115 g
Operating voltage display	Green LED
Operating mode	100% operating factor
Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 55 °C
Mounting position	Vertical, horizontal
Assembly instructions	Can be aligned with spacing = 5 mm

Connection data, input

Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Stripping length	8 mm
Screw thread	M3

Connection data, output

Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²

Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Stripping length	8 mm

Certificates / Approvals



Certification GOST

Accessories


Item	Designation	Description
------	-------------	-------------

Marking


2947035	EMG-GKS 12	Equipment marker, width 12 mm
---------	------------	-------------------------------

Diagrams/Drawings

Diagram

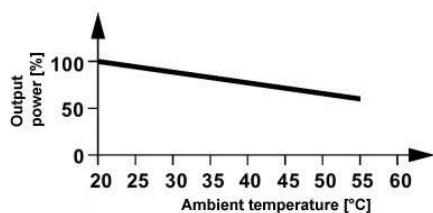

Circuit diagram

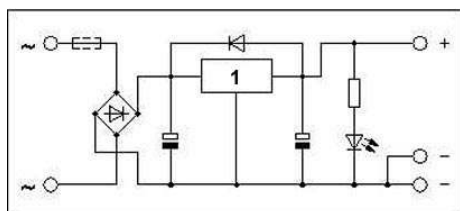

1 = regulator

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;