


HC-B 10-TMB-100/O1STM25S-EEE

Order No.: 1460366

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1460366>

HEAVYCON ADVANCE B10 sleeve housing, with bayonet locking (Allen screw), salt water resistant aluminum, height: 100 mm, with 1 x M25 thread, lateral cable outlet, without surface; conductive seal (EMC properties)

| Commercial data | |
|--------------------------|--|
| GTIN (EAN) |  4 046356 592659 |
| sales group | D002 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Catalog page information | Page 568 (PC-2011) |

Product notes

WEEE/RoHS-compliant since:
07/02/2010

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

| Technical data | |
|---------------------|--|
| General data | |
| Note | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
| Design | B10 |
| Height | 100 mm |


| | |
|---------------------------------|---|
| Locking type | Bayonet locking |
| Fixing screws | M6 |
| No. of cable exits | 1 |
| Cable exit | Lateral |
| Pg screw connection | None |
| Type of the screw connection | 1x M25 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Die-cast aluminum, salt water resistant |
| Housing surface material | Uncoated |
| Seal material | NBR, conductive |
| Material lock | High-grade steel |
| Connection | If insulating powder coating is present on the control cabinet panel, it should be removed from the profile gasket area in order to ensure optimum shielding. |

Accessories

| Item | Designation | Description |
|-----------------|---------------------|---|
| Assembly | | |
| 1604641 | HC-B-BF | Panel mounting flange for HEAVYCON ADVANCE TMB housing with bayonet locking |
| 1604654 | HC-B-BF-SET | Bayonet mounting-flange set, consisting of 2 mounting flanges with 4 self-tapping Torx head screws and 4 fan-type spacers |
| General | | |
| 1690943 | HC-B 10-TMB-SD-IP65 | HEAVYCON ADVANCE IP65 protective cover B10, with bayonet locking, with retaining cord, diameter of retaining cord eyelet 3 mm |

Diagrams/Drawings

Dimensioned drawing

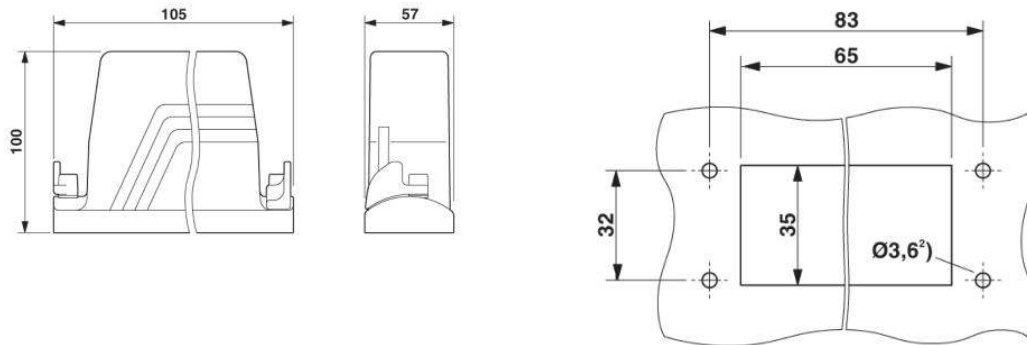

Panel cutout

²⁾ When self-tapping Torx screws are used
(Torx20, M4)

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;