

REV. 1
DCO 63333


| | |
|-----------------|----------------------------|
| COIL: @ 25°C | |
| RESISTANCE | 25 OHMS ±10% |
| NOMINAL VOLTAGE | 6.0 VDC |
| MUST OPERATE | 3.2 VDC |
| MUST RELEASE | 2.1 VDC MAX, 0.46 VDC MIN. |

ENVIRONMENT:

| | | | | | | |
|-------------|-----|--------|------|--------------|----|-----|
| VIBRATION | 10 | CPS TO | 2000 | CPS @ | 15 | g's |
| SHOCK | 100 | g's | 6 | MS. DURATION | | |
| TEMPERATURE | -65 | °C TO | +125 | °C | | |

NOTES: OPERATE & RELEASE 7 MS MAX.
(INCLUDING BOUNCE)

CUSTOMER DATA SHEET

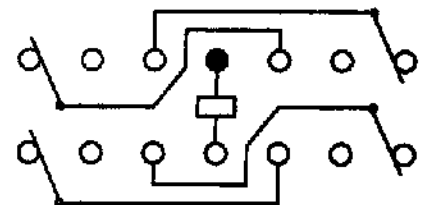

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMP 28 VDC RESISTIVE
100,000 OPERATIONS

DR. R.B. 4/20/98

CK. TLG 10-24-00

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/40-006 REV.

"SR" RELAY

SR-7606