

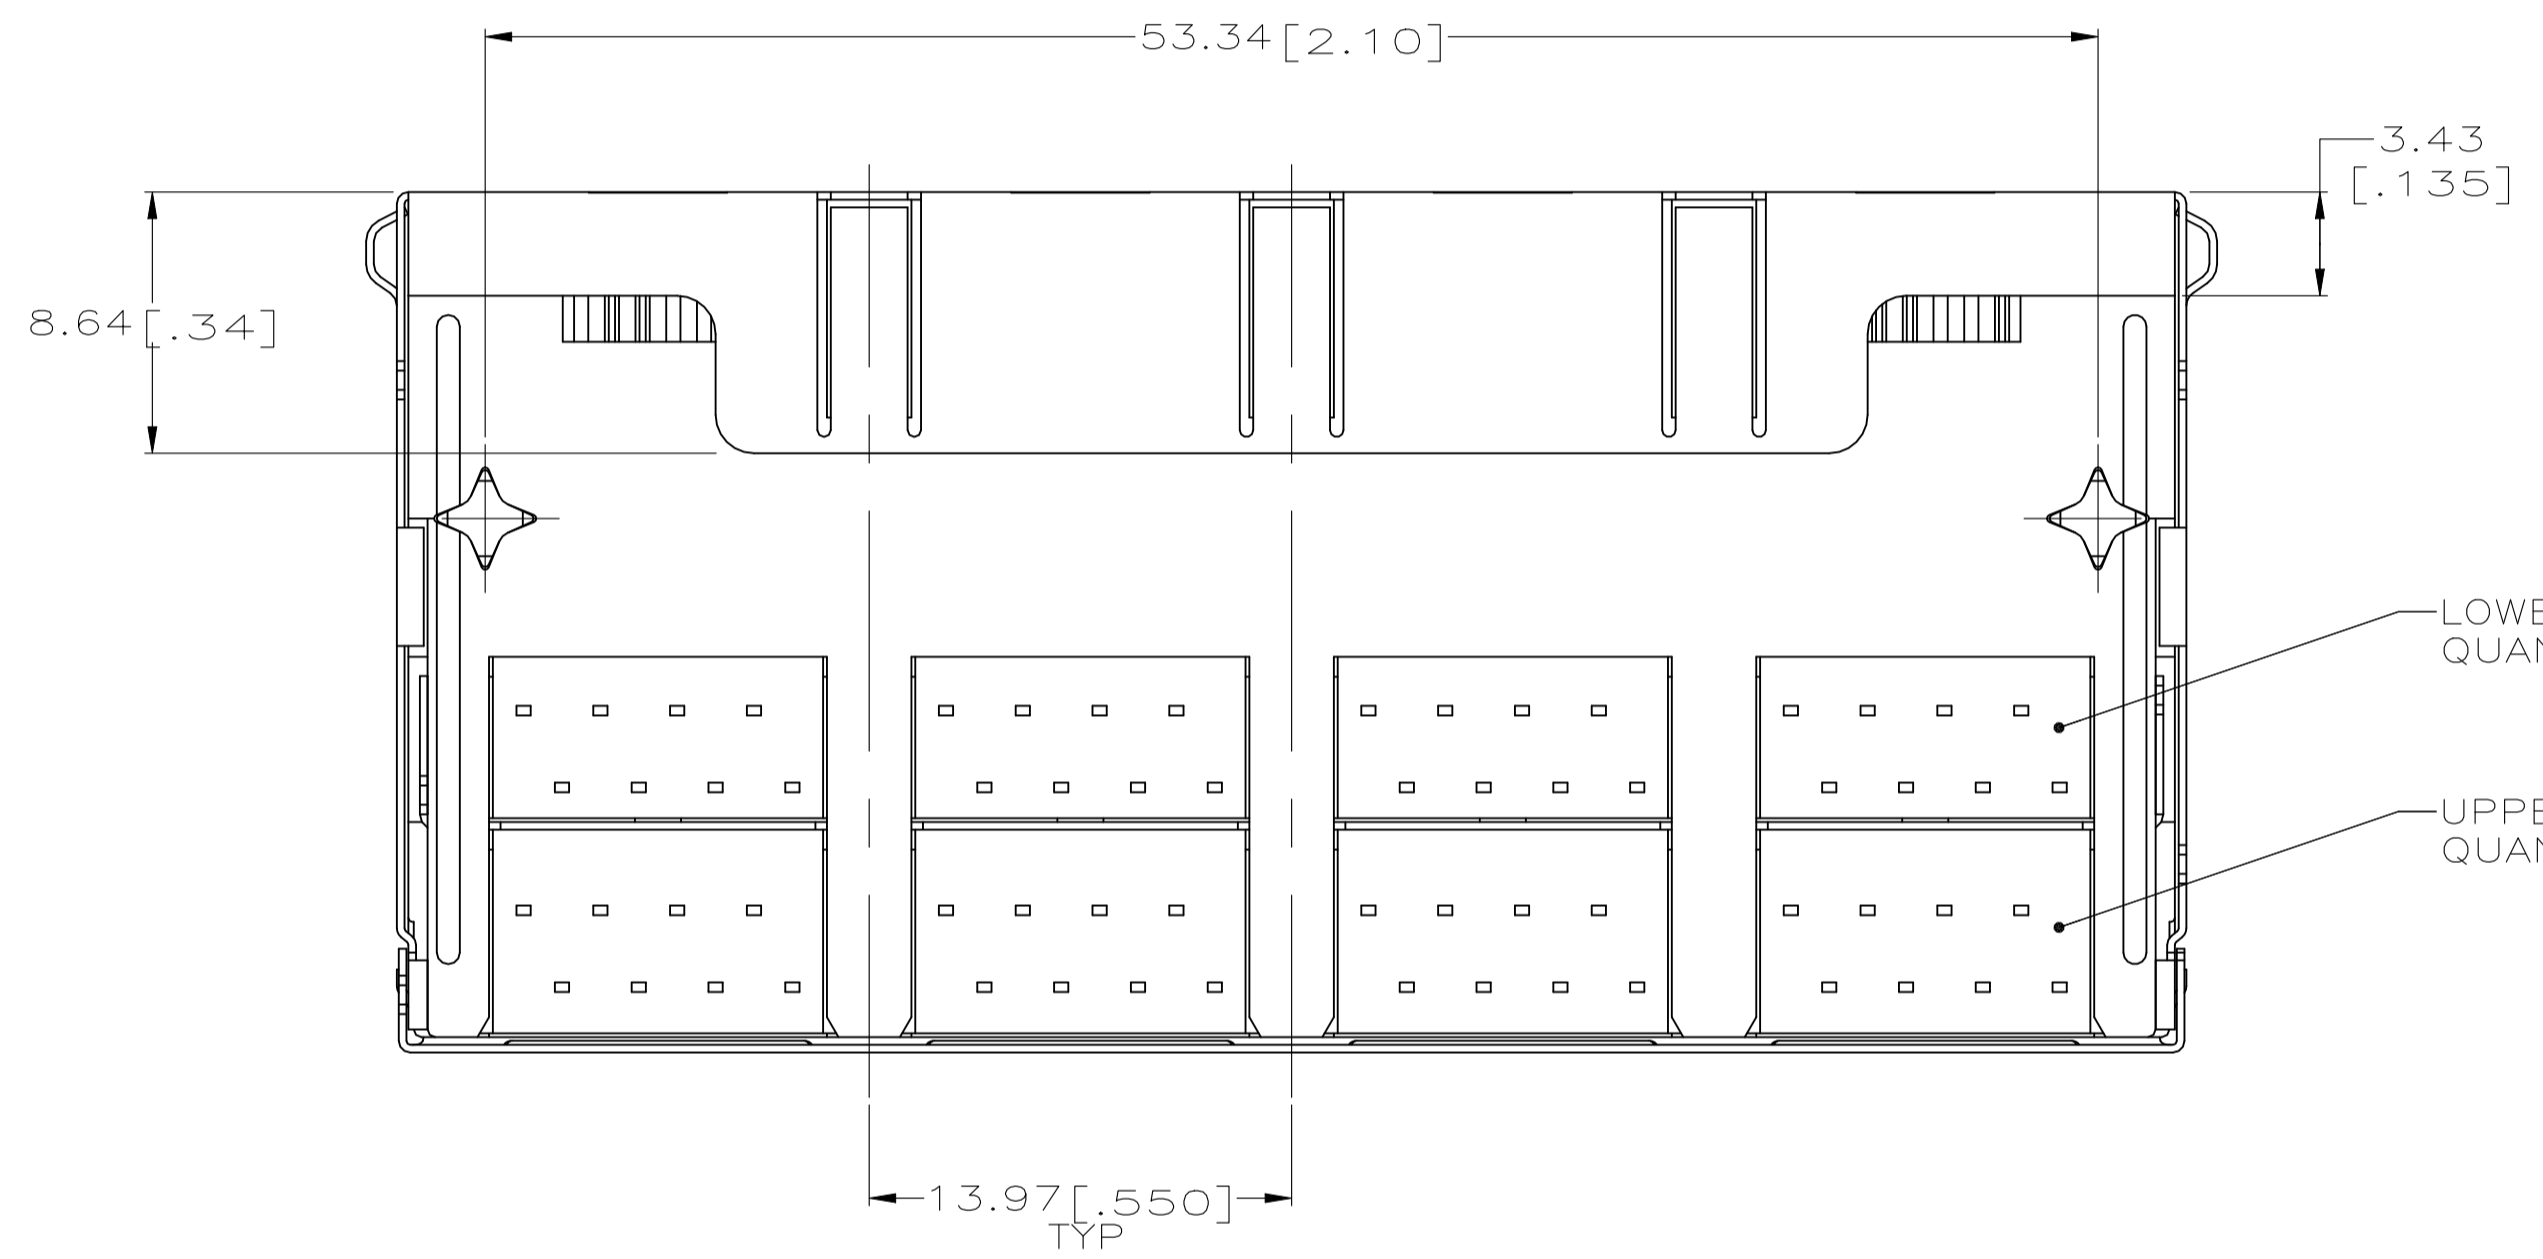
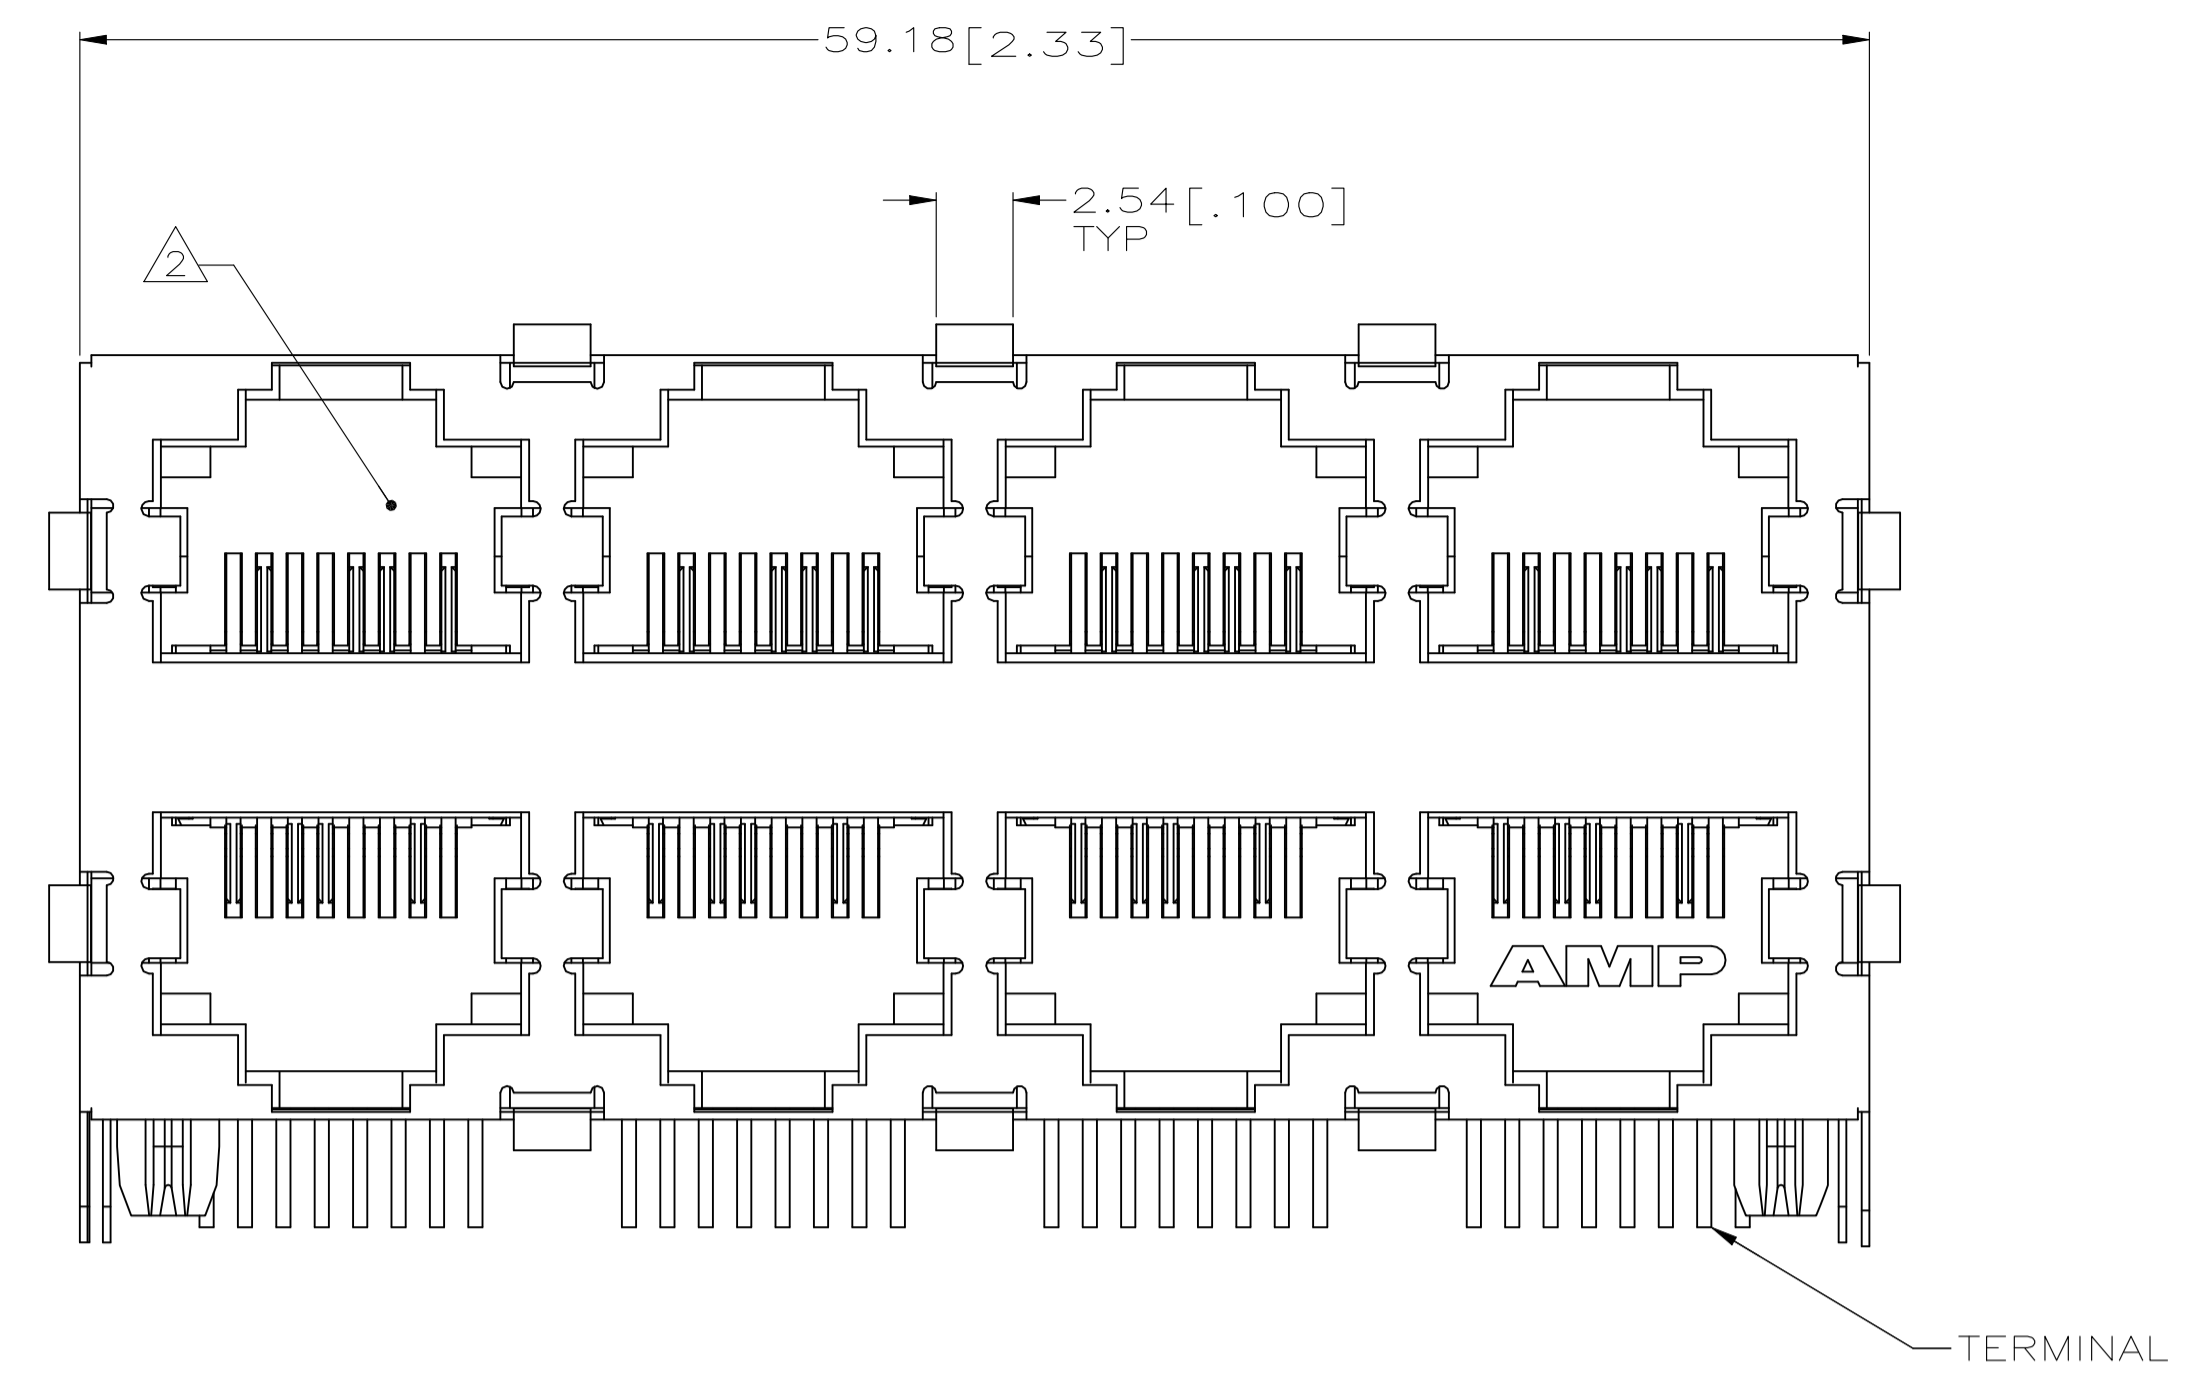
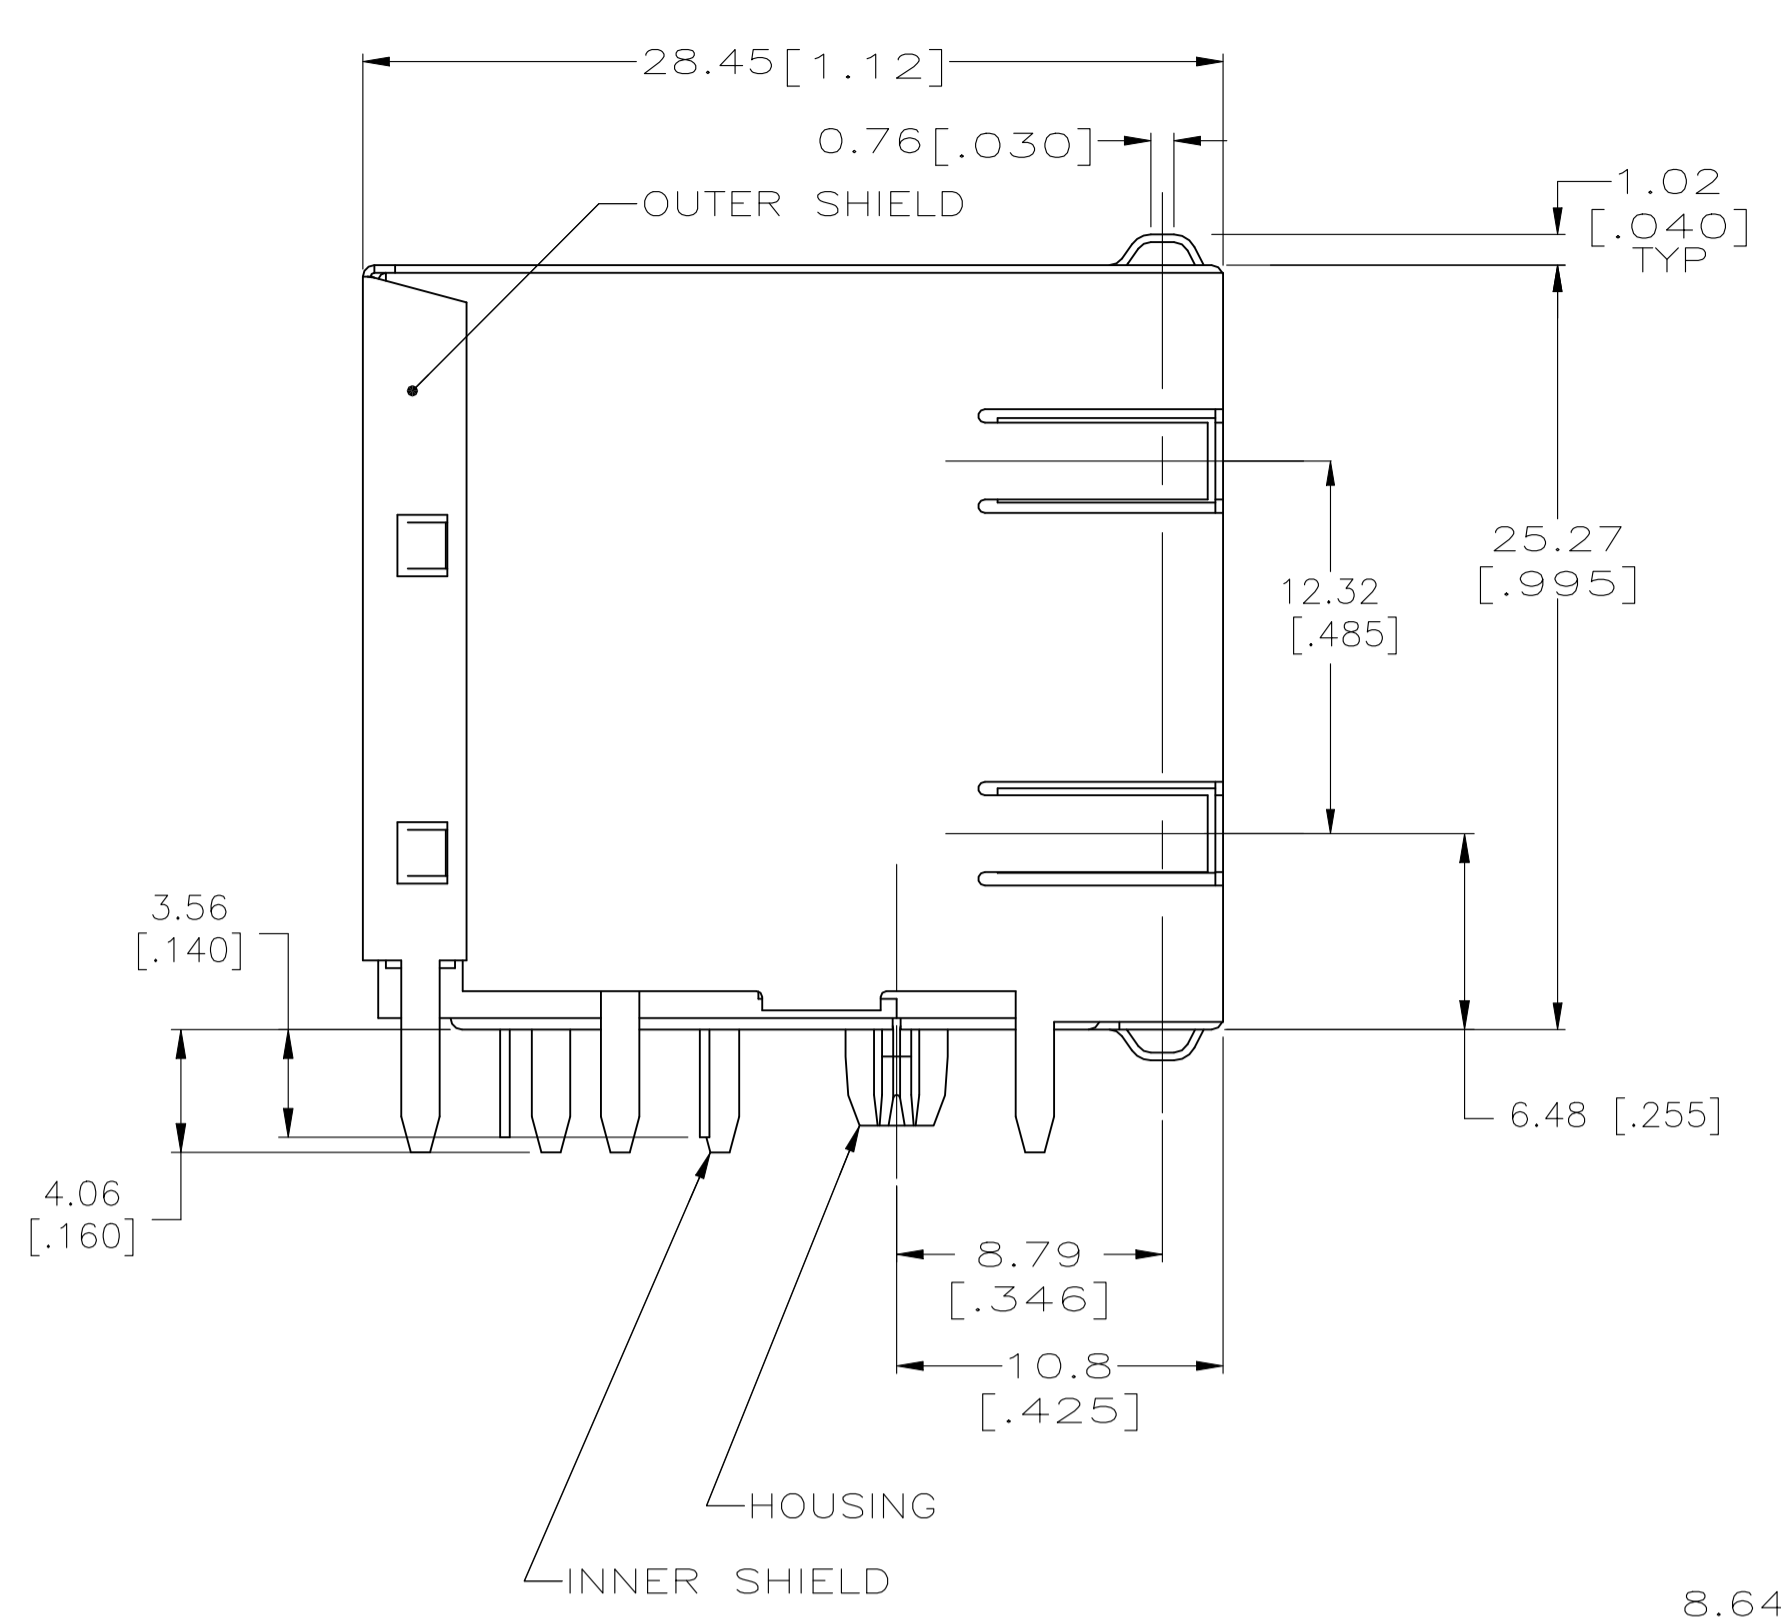
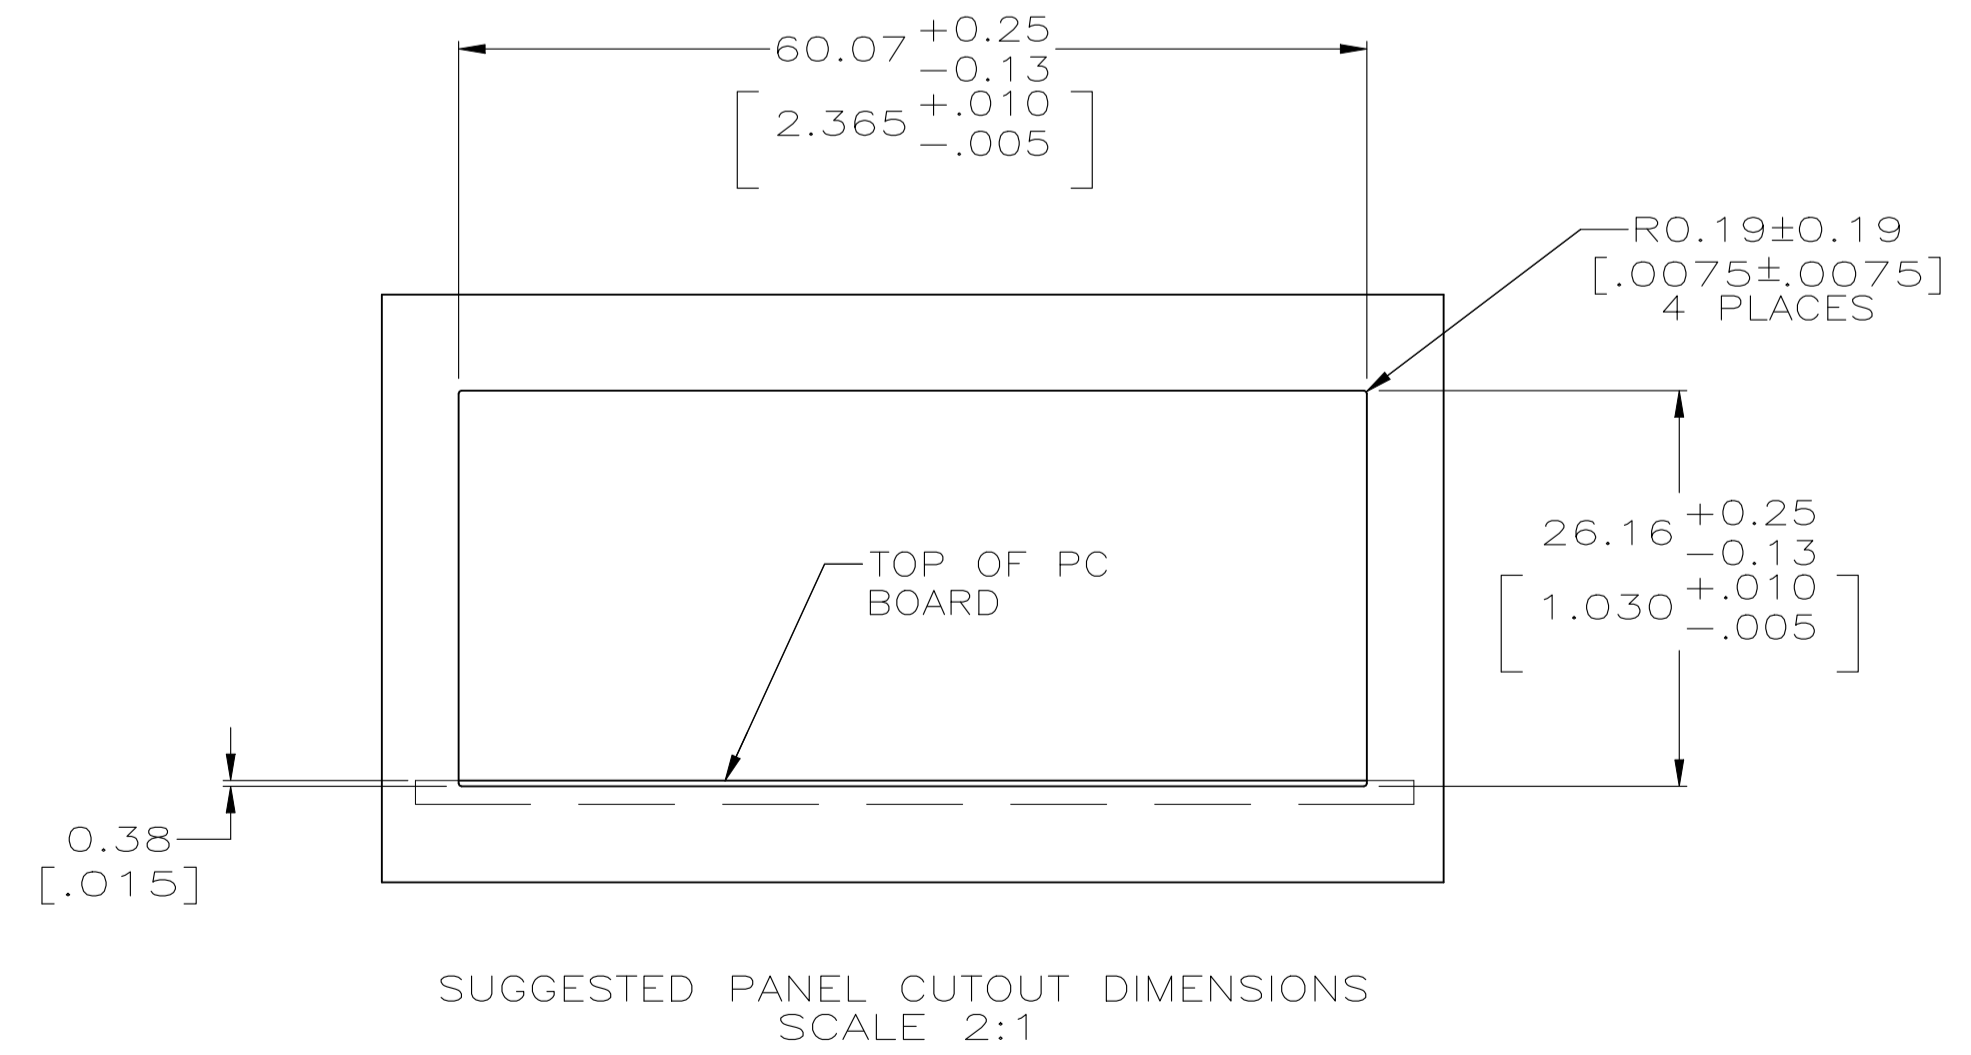


REVISIONS					
REV	DESCRIPTION	DATE	BY	CHK	APP'D
B1	MODIFIED AS PER ECR-23-169440	31MAR2023	KV	HW	

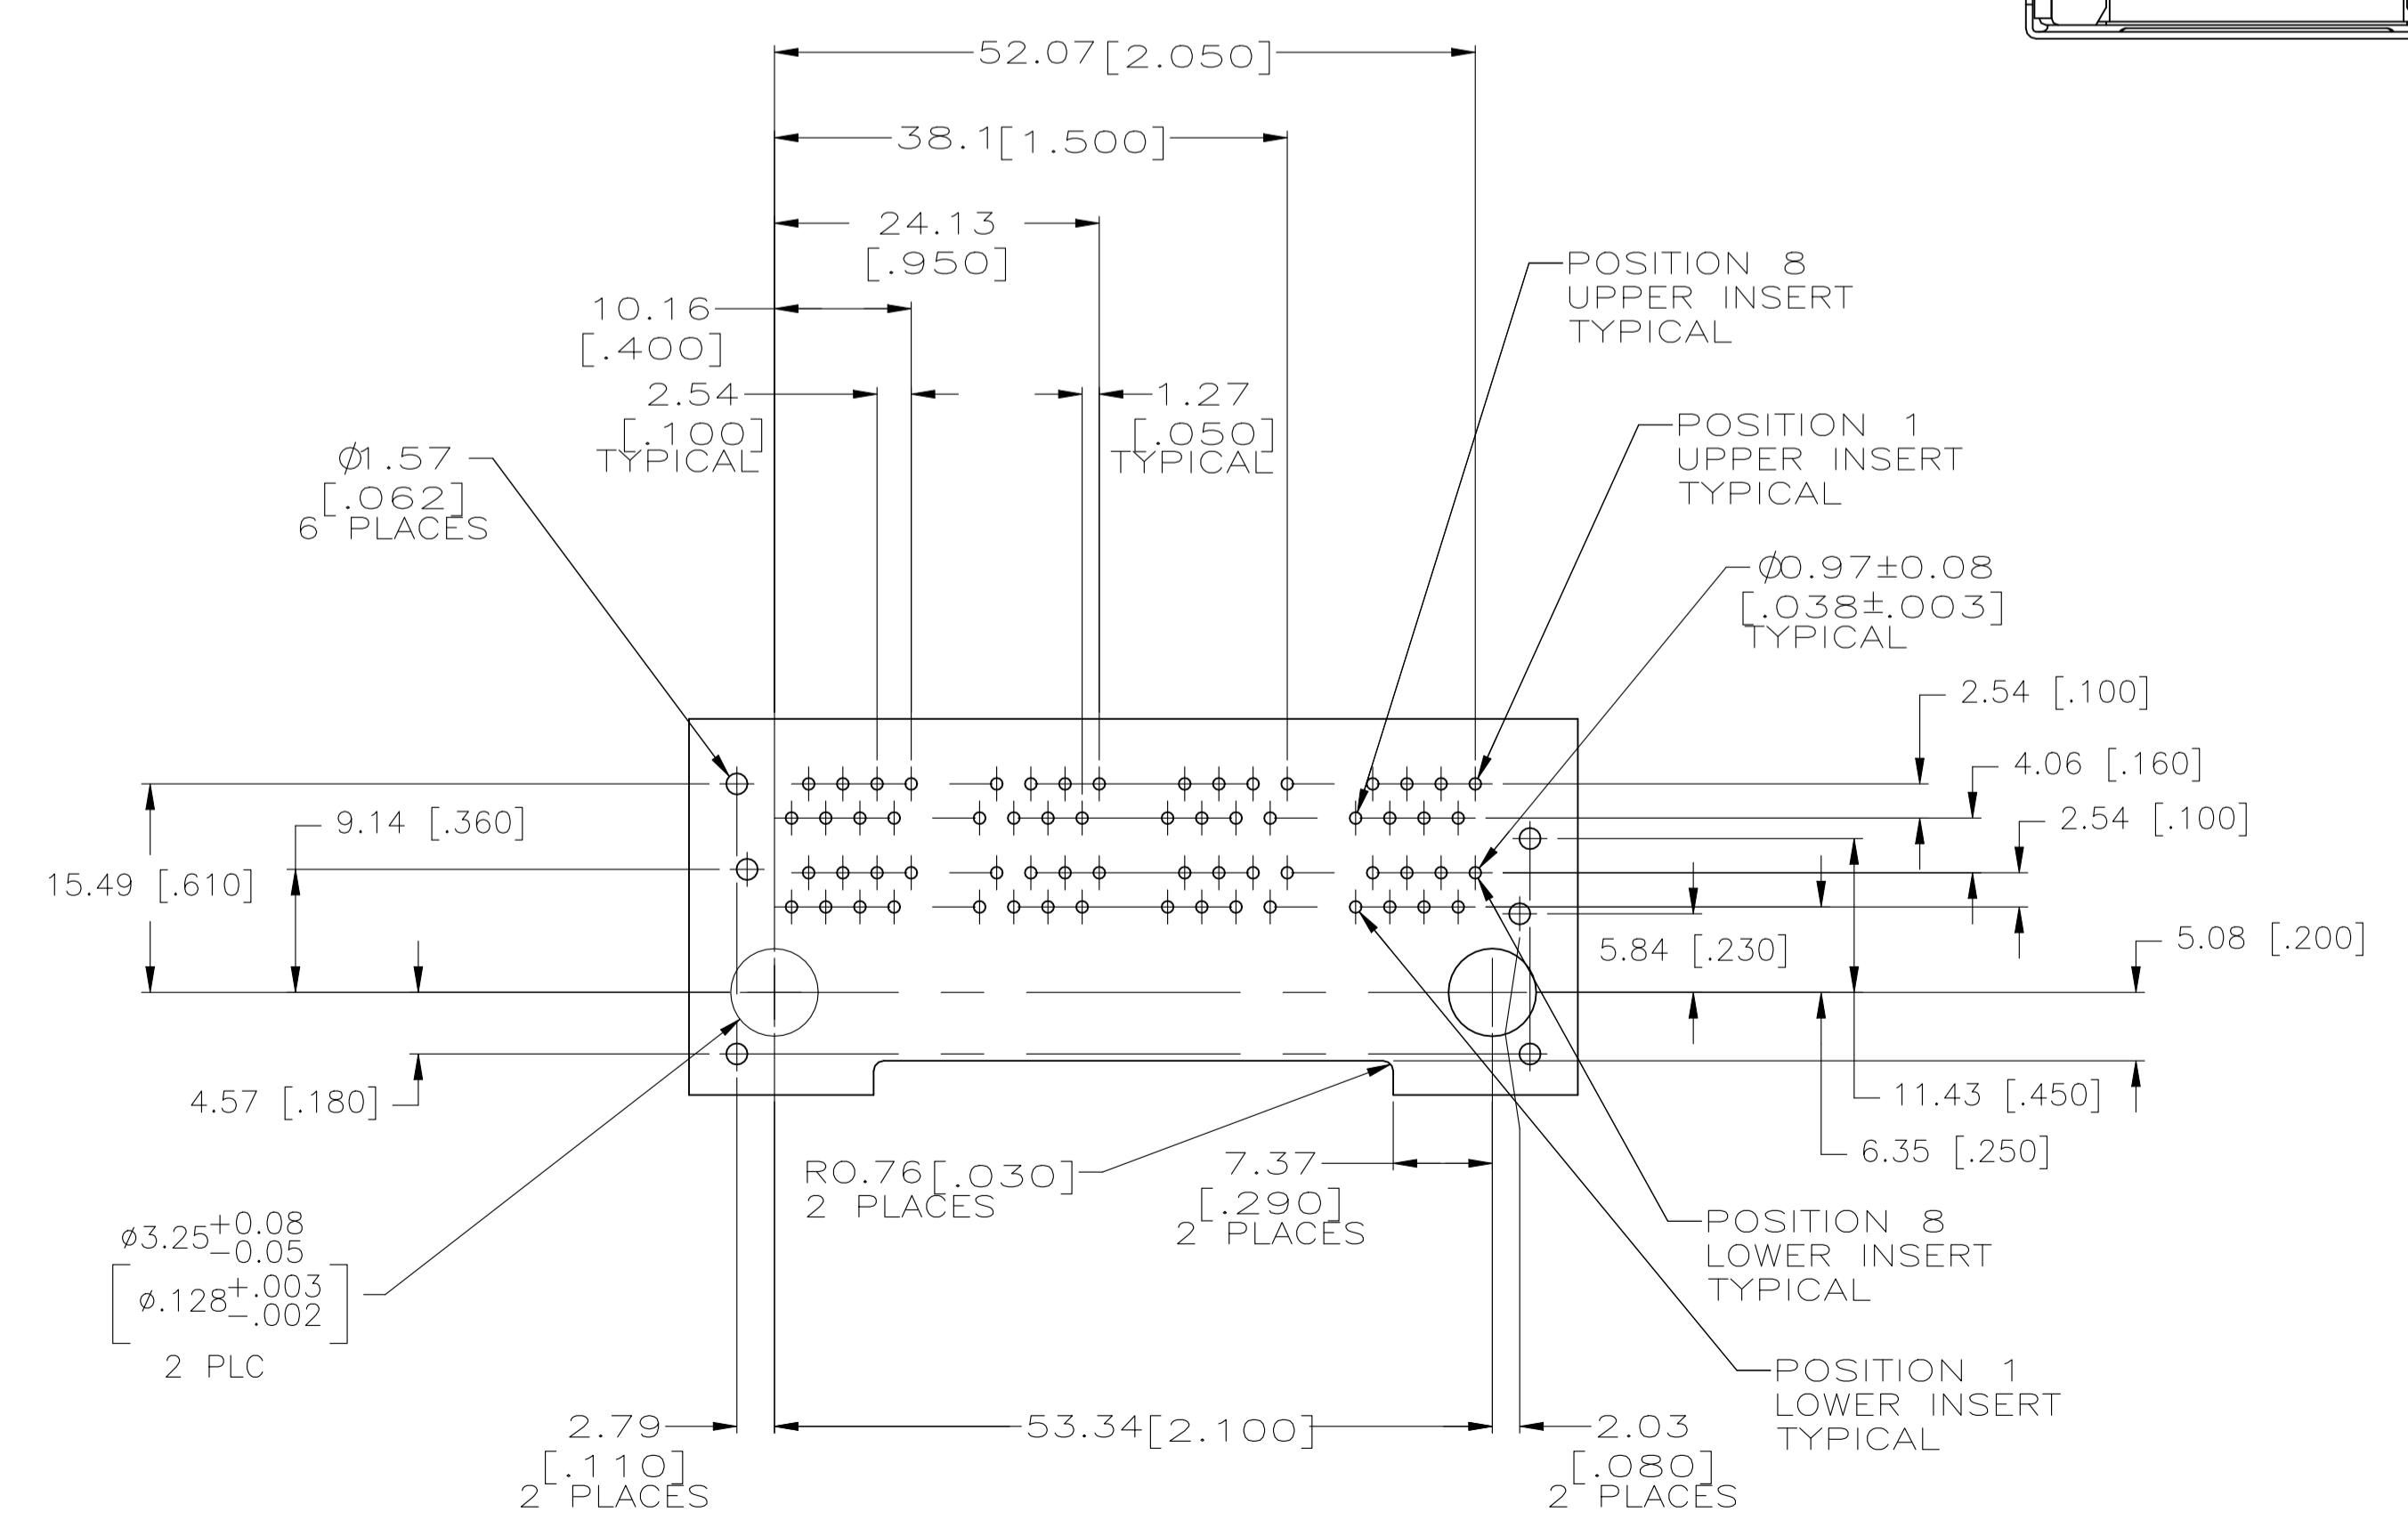

- MATERIAL:
HOUSING - PCT POLYESTER, BLACK, UL94V-0.
OVERMOLDED TERMINAL ARRAY - HIGH TEMPERATURE NYLON, COLOR: NATURAL
TERMINALS - 0.33 [.013] THICK PHOS BRONZE PLATED WITH 1.27um [.000050] MIN THICK HARD GOLD IN LOCALIZED AREA AND 3.81um [.000150] MIN THICK MATTE TIN IN SOLDER AREA OVER 1.27um [.000050] MIN THICK NICKEL UNDERPLATE.
OUTER SHIELD AND INNER SHIELD-0.25[.010] THICK COPPER ALLOY PLATED WITH 1.27um[.000050] MIN NICKEL. PCB GROUND TABS DIPPED WITH 2.03um[.000080] MIN TIN
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- DATE CODE LOCATED ON REAR OF PART APPROXIMATELY AS SHOWN:
FIRST 2 DIGITS ARE LAST 2 DIGITS OF YEAR, SECOND 2 DIGITS ARE MANUFACTURING WORK WEEK, LAST DIGIT IS DAY OF WEEK, WITH SUNDAY = 1.
- PARTS PACKAGED IN SEALED BAGS WITH DESICCANT
- PARTS SUITABLE FOR LEAD FREE REFLOW PROCESSING TO 260° C

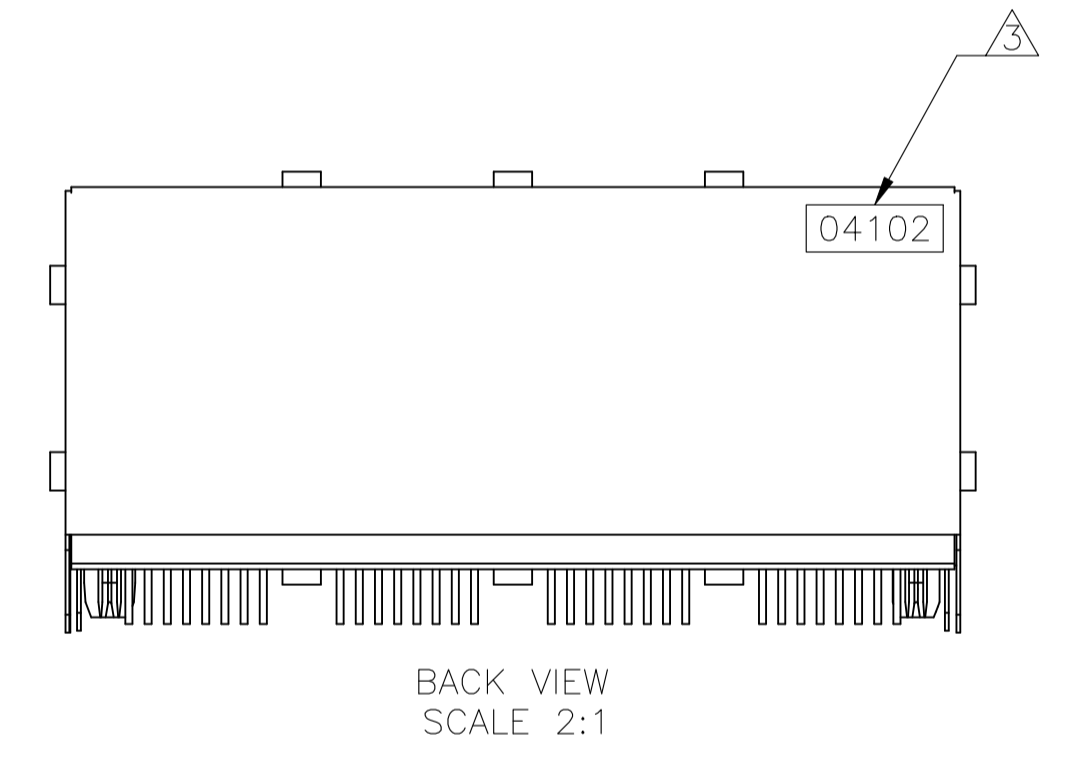

PC BOARD LAYOUT VIEWED FROM COMPONENT SIDE
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN T. SPRINKLE / 12SEPT2007		A. MAYER / 12SEPT2007	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME: J. WESTMAN / 12SEPT2007	
0 PLC	±	0	±	PRODUCT SPEC	
1 PLC	±	0.25	±	108-1163-2	
2 PLC	±	0.13	±	APPLICATION SPEC	
3 PLC	±	0.13	±	114-2048	
4 PLC	±	0.13	±	WEIGHT 0.000000	
ANGLES	±	0	±	A1 00779 C=2007105	
MATERIAL SEE NOTE 1	FINISH SEE NOTE 1	CUSTOMER DRAWING		SCALE 4:1	SHEET 1 of 1 REV B1