

CTMPH121004F

Series

From 0.24 μH to 2.2 μH

SPECIFICATIONS

Isat: DC current (A) that will cause L to drop approximately 30%.
 Irms: DC current (A) that will cause an approximate ΔT of 40°C.

Part Number	Inductance (μH)	L Test Freq. (MHz)	DCR Max.(Typ.) (m Ω)	Isat Max.(Typ.) (A)	Irms Max.(Typ.) (A)
CTMPH121004F-R24M	0.24	2.0	16(12)	9.0(11.5)	6.0(6.8)
CTMPH121004F-R33M	0.33	2.0	17(12.5)	8.0(9.5)	5.8(6.5)
CTMPH121004F-R47M	0.47	2.0	24(19)	6.0(7.3)	4.5(5.4)
CTMPH121004F-1R0M	1.0	2.0	46(39)	4.1(4.7)	3.3(3.7)
CTMPH121004F-1R5M	1.5	2.0	58(50)	3.5(4.0)	3.2(3.5)
CTMPH121004F-2R2M	2.2	2.0	85(73)	3.0(3.5)	2.5(2.8)




CHARACTERISTICS

Description: SMD Molded Magnetically Shielded Inductors
Applications: Smartphone, Tablet PC, Hard Disk for Ultrabook, DC/DC Converters, Portable Devices, etc.
Operating Temperature: -40°C to 125°C (including self-temperature rise)
Inductance Tolerance: $\pm 20\%$
Testing: Inductance is tested on an E4991A/HP4287A+16197A, 2MHz, 0.2V.
Packaging: Tape and Reel.
Miscellaneous: **RoHS Compliant.**
Additional Information: Additional electrical & physical information available upon request.
Samples available. See website for ordering information.

PHYSICAL DIMENSIONS

Size	A	B	C Max.	D
mm	3.2 \pm 0.3	2.5 \pm 0.3	1.0	0.5 \pm 0.3
inches	0.126 \pm 0.012	0.098 \pm 0.012	0.039	0.020 \pm 0.012

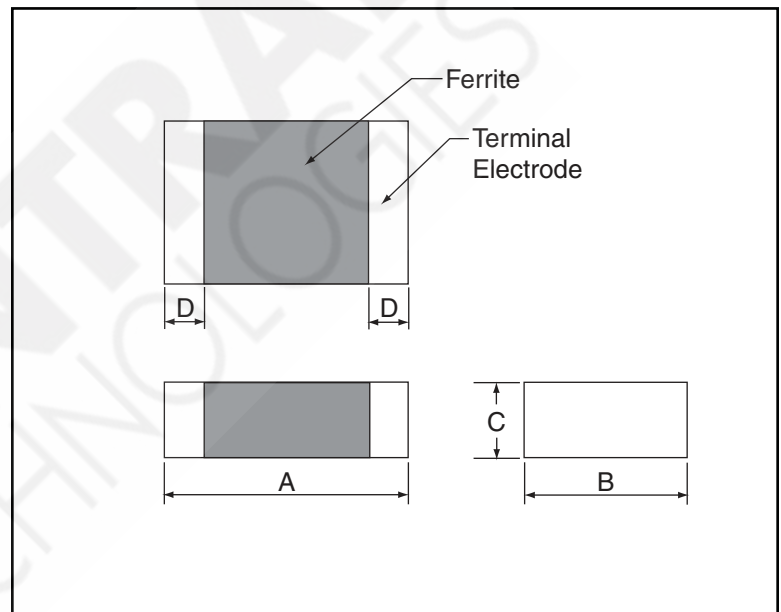

PAD LAYOUT

