


LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24B.GX00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24B.GX00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24B.GX00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24B.GX00LF

Performance class: 4 --> 200 mating/un-mating
6 --> 500 mating/un-mating

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

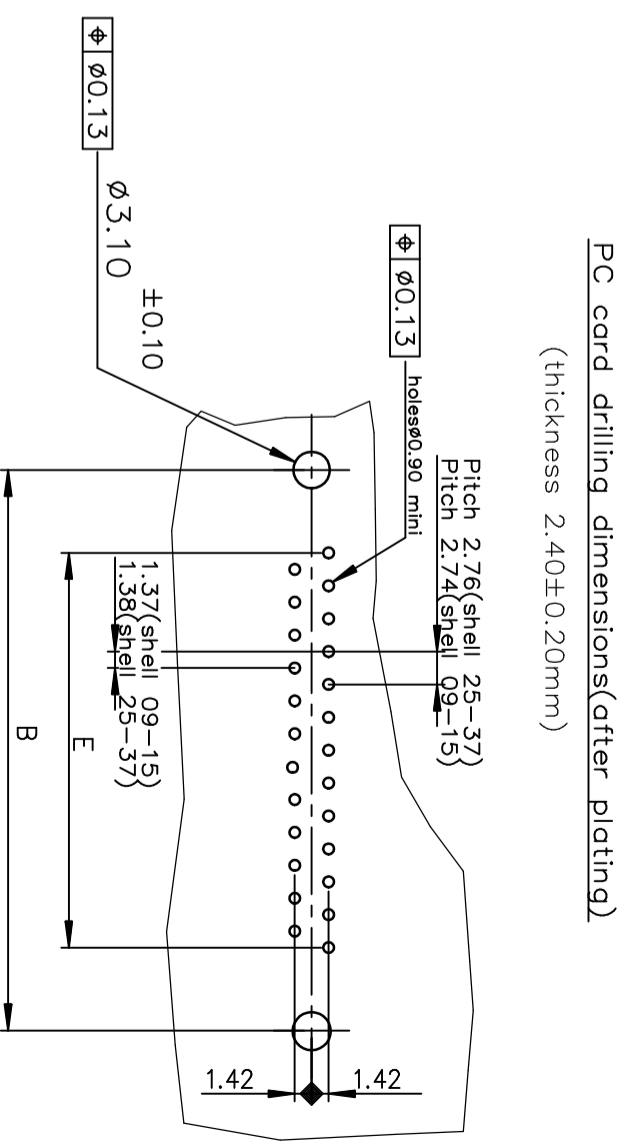

PC card drilling dimensions(after plating)
(thickness 2.40±0.20mm)

mat'l. code		surface		tolerance		projection		product family	
ltr	ecn no	dr	date	ISO 1302	ISO 406	ISO 1001	MM	D-SUB	D-SUB
F	EXL-21654	AB	2015-10-26	tolerances unless otherwise specified					
G	EXL-42817	ACU	2021-10-18	angles	linear	.00±0.05	MM	MALE DELTA-D	MALE DELTA-D
				0±1°		.000±0.005	scale 2:1	STRAIGHT, SOLDER TYPE	STRAIGHT, SOLDER TYPE
				dr	JOUBERT	1996-09-10		dwg no	sheet 1 of 1
					engnREGAR MATHEW	2021-10-18		C01-8646-0489	A3
					chr GREGAR MATHEW	2021-10-18		Product Customer Drawing	size
					appd SANOU KURAKOSF	2021-10-18			
sheet index	revision	sheet	1						