

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION DEC ,2005.

© COPYRIGHT 2005 By -

ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
E	B	B	ECO-14-000450	13APR2014	RZ MY

NOTES:

1 SINGLE PACKING: ONE CONNECTOR PER LABELED BAG PACKAGED. LABELED PER TEC-107-115

2 TRAY PACKAGED

3 Ni PLATING

4 Au PLATING

5. ELECTRICAL CHARACTERISTICS

FREQUENCY RANGE:	DC - 1 GHz
NOMINAL IMPEDANCE:	75 Ohm
INSULATION RESISTANCE:	5000 MOhm
WORKING VOLTAGE:	500 Volts RMS at Sea Level
DIELECTRIC WITHSTAND VOLTAGE:	1500 Volts RMS Max
CONTACT RESISTANCE:	
CENTER CONTACT:	1.50 mOhm Max
OUTER CONTACT:	1.00 mOhm Max
VSWR @ 0.3 GHz:	1.8 Max
INSERTION LOSS @ 0.3 GHz:	0.8 dB MAX



6. MECHANICAL CHARACTERISTICS

DURABILITY: 500 Cycles Min

7. ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE: -40 to +60 DegC

8. SUPPLIED SEMI-ASSEMBLED (PACK CONTAINS LOOSE PIECES)

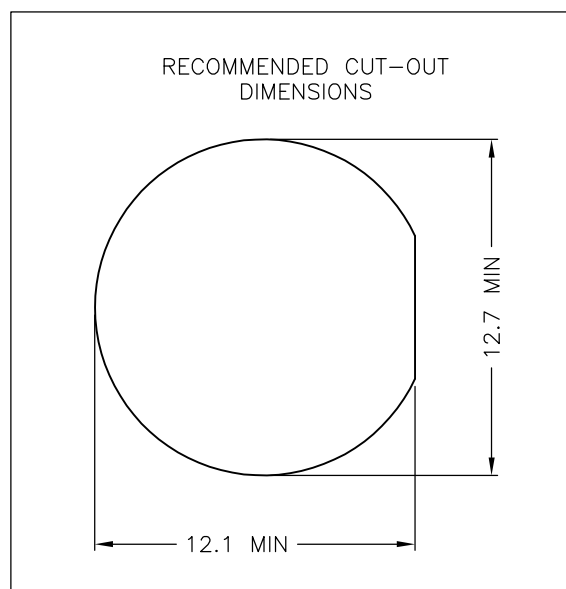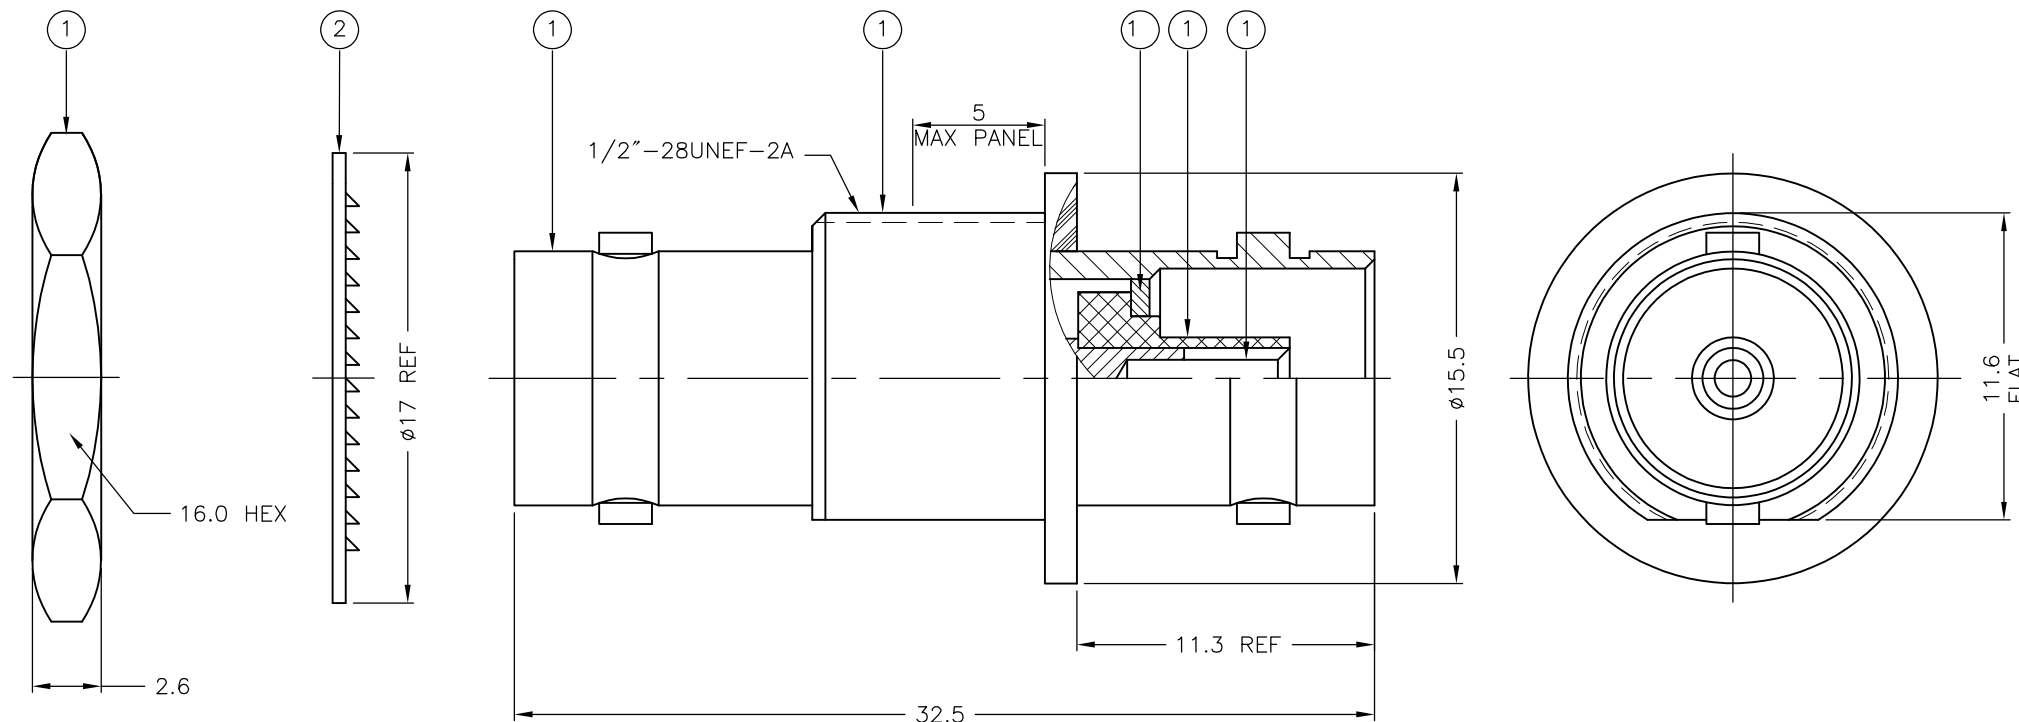

QTY	QTY PER ASSY	MATERIAL	DESCRIPTION	ITEM
1	1	BRASS	CENTER CONTACT	7
2	2	POM	DIELECTRIC	6
1	1	BRASS	WASHER	5
1	1	ABS	ISOLATOR	4
1	1	BRASS	BODY	3
1	1	STEEL	LOCKWASHER	2
1	1	BRASS	NUT	1
6--0	1--0	MATERIAL	DESCRIPTION	ITEM
2	1			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R GOODALL 12-9-01	STE TE Connectivity	
DIMENSIONS: mm		CHK F W-KING 12-9-01		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F W-KING 12-9-01	NAME BNC INSULATED BULKHEAD ADAPTOR JACK 75 OHM	
0 PLC ± -		PRODUCT SPEC	APPLICATION SPEC	
1 PLC ± 0.2			SIZE A3	CAGE CODE 00779
2 PLC ± 0.1			DRAWING NO C-1478238	RESTRICTED TO
3 PLC ± -				
4 PLC ± -				
ANGLES ± -				
FINISH -		WEIGHT -	SCALE NTS	SHEET 1 OF 1
MATERIAL SEE TABLE			CUSTOMER DRAWING	REV B